


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	MARKER PER CARDS	STYLE	LEGEND	STD. PKG. QTY.	PART NUMBER	MARKER PER CARDS	STYLE	LEGEND	STD. PKG. QTY.
PCV-110AY	1	A	110 VOLTS	5	PCV-110BY	4	B	110 Volts	5
PCV-115AY	1	A	115 VOLTS	5	PCV-115BY	4	B	115 Volts	5
PCV-120/208AY	1	A	120/208 VOLTS	5	PCV-120/208BY	4	B	120/208 Volts	5
PCV-120AY	1	A	120 VOLTS	5	PCV-120BY	4	B	120 VOLTS	5
PCV-12470AY	1	A	12470 VOLTS	5	PCV-12470BY	4	B	12470 VOLTS	5
PCV-13200AY	1	A	13200 VOLTS	5	PCV-13200BY	4	B	13200 VOLTS	5
PCV-13800AY	1	A	13800 VOLTS	5	PCV-13800BY	4	B	13800 VOLTS	5
PCV-1PHAY	1	A	Single Phase	5	PCV-1PHBY	4	B	Single Phase	5
PCV-208AY	1	A	208 VOLTS	5	PCV-208BY	4	B	208 VOLTS	5
PCV-220AY	1	A	220 VOLTS	5	PCV-220BY	4	B	220 VOLTS	5
PCV-2300AY	1	A	2300 VOLTS	5	PCV-2300BY	4	B	2300 VOLTS	5
PCV-230AY	1	A	230 VOLTS	5	PCV-230BY	4	B	230 VOLTS	5
PCV-2400AY	1	A	2400 VOLTS	5	PCV-2400BY	4	B	2400 VOLTS	5
PCV-240AY	1	A	240 VOLTS	5	PCV-240BY	4	B	240 VOLTS	5
PCV-277/480AY	1	A	277/480 VOLTS	5	PCV-277/480BY	4	B	277/480 VOLTS	5
PCV-277AY	1	A	277 VOLTS	5	PCV-277BY	4	B	277 VOLTS	5
PCV-380AY	1	A	380 VOLTS	5	PCV-380BY	4	B	380 VOLTS	5
PCV-3PHAY	1	A	Three Phase	5	PCV-3PHBY	4	B	Three Phase	5
PCV-415AY	1	A	415 VOLTS	5	PCV-415BY	4	B	415 VOLTS	5
PCV-4160AY	1	A	4160 VOLTS	5	PCV-4160BY	4	B	4160 VOLTS	5
PCV-440AY	1	A	440 VOLTS	5	PCV-440BY	4	B	440 VOLTS	5
PCV-460AY	1	A	460 VOLTS	5	PCV-460BY	4	B	460 VOLTS	5
PCV-480AY	1	A	480 VOLTS	5	PCV-480BY	4	B	480 VOLTS	5
PCV-600AY	1	A	600 VOLTS	5	PCV-600BY	4	B	600 VOLTS	5
PCV-BLANKAY	1	A	Blank- No Legend	5	PCV-BLANKBY	4	B	Blank- No Legend	5
PCV-ESAY	1	A	Emergency Service	5	PCV-ESBY	4	B	Emergency Service	5
PCV-FAAY	1	A	Fire Alarm	5	PCV-FABY	4	B	Fire Alarm	5
PCV-FOAY	1	A	Fiber Optic	5	PCV-FOBY	4	B	Fiber Optic	5
PCV-FOCAY	1	A	Fiber Optic Cable	5	PCV-FOCBY	4	B	Fiber Optic Cable	5
PCV-MAINAY	1	A	Main	5	PCV-MAINBY	4	B	Main	5
PCV-TELEAY	1	A	Telephone	5	PCV-TELEBY	4	B	Telephone	5
					PCV-24VDCBY	4	B	24 VOLT DC	5

2

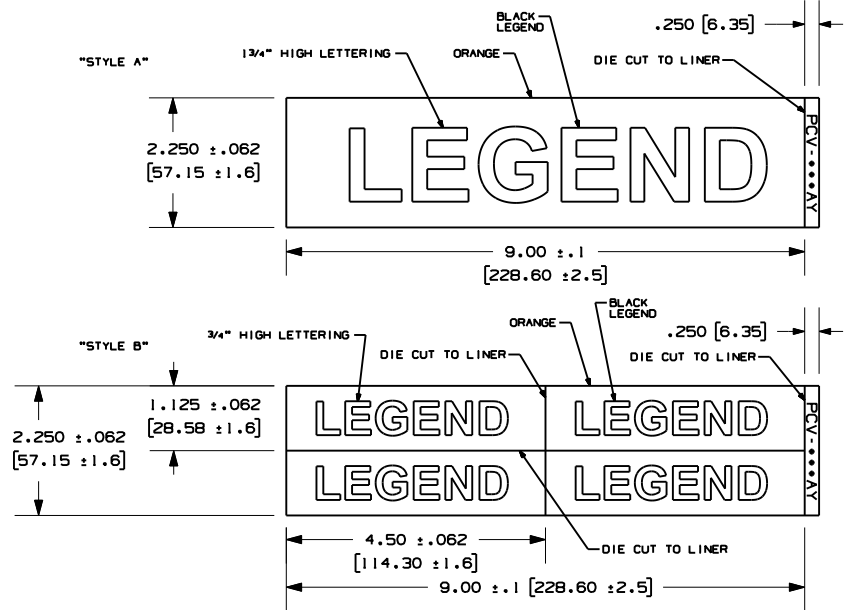

NOTE:

1. CARDS TO BE PACKAGED 5 CARDS PER BAG.
2. MILLIMETER ARE IN [ ].
3. SEE CUSTOMER DRAWING C10829 FOR 1/2" PCV MARKERS.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
2	7/25/11	RVU		ADD PCV-24VDCBY TO THE TABLE FOR 24V DC SOLAR VOLTAGE MARKER.	6470	R		
1	3/25/10	RVU		COMBINE ALL P/N WITH CUSTOMER DRAWINGS: C10358, AND C10359.	5996	R		
0	8-1-05	RVU		DRAWING RELEASE.	4101	R		

CAD FILENAME/LAYERS		100318JS-DC-C10360/03C	
<h1>PANDUIT</h1> <p>CORP. TINLEY PARK, ILLINOIS</p>			
<p>CUSTOMER DRAWING PCV'S VOLTAGE AND FIBER OPTIC MARKERS</p>			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .12 (.XXX) ± .025 (.XX) ± .062 ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY RVU	MAT'L:	SCALE NTS	
DATE 8-1-05	LEGEND BLACK/ ORANGE BACKGRD VINYL FILM GMVI	DRAWING NO. C10360	DWG A SIZE
CHK'D <i>[Signature]</i>			