


- NOTES:
- UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
 - WIRE RANGE: 350 kcmil - #10 AWG. ONLY ONE CONDUCTOR PER PORT ALLOWED.
 - STRIP LENGTH: 1.06 +.06/-0
 - HEX KEY SIZE: 5/16", TIGHTENING TORQUE 275 IN-LB.
 - VOLTAGE RATING: 600 V. MAX.
 - TEMPERATURE RATING: 90° C.
 - CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
 - INSULATION MATERIAL IS CLEAR PVC.
 - CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
 - ALL DIMENSIONS SHOWN ARE NOMINAL.
 - PACKAGE QTY: -2 = 2 PCS
-1 = 1 PCS
 - THIS PART IS ROHS COMPLIANT.

PART NUMBER	# CONDUCTOR PORTS	DIM "L"	DIM "A"
PCSBMT350-4S-2Y	4	6.17	5.00
PCSBMT350-6S-2Y	6	8.17	7.00
PCSBMT350-8S-2Y	8	10.17	9.00
PCSBMT350-10S-1Y	10	12.17	11.00
PCSBMT350-12S-1Y	12	14.17	13.00

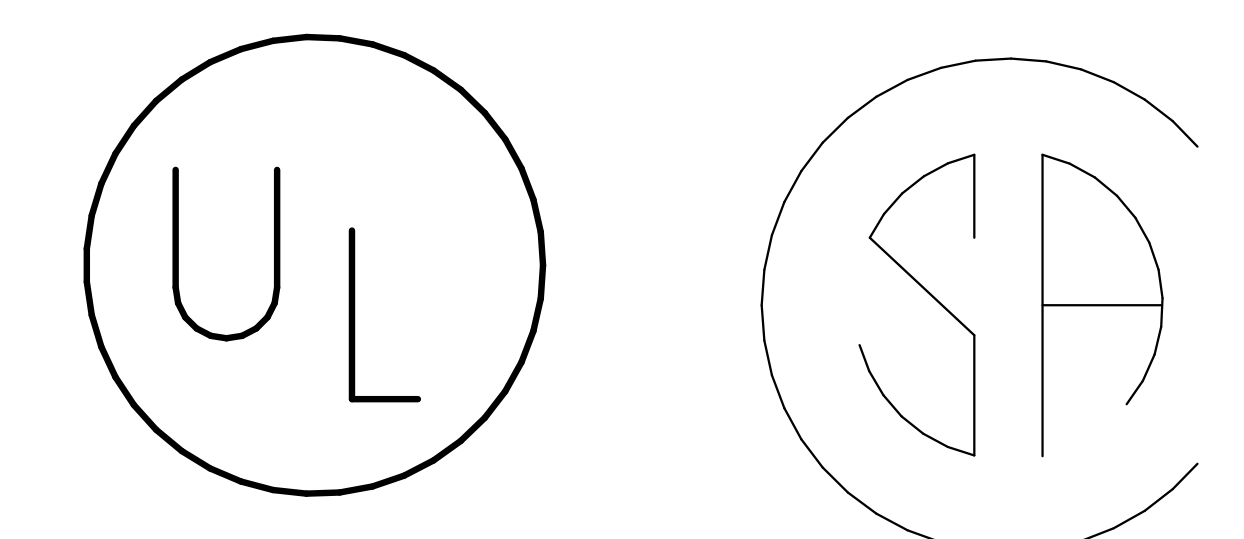

C41537_00

00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00353			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	

PANDUIT CORP. TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTORS WITH MOUNTING HOLES
PCSBMT 350 SINGLE SIDED SERIES

DRAWN BY: JHNU CHK'D: SCALE: N/A DRAWING NO.: C41537