


PART NUMBER	# CONDUCTOR PORTS	DIM "L"
PCSB600-2S-4Y	2	2.72
PCSB600-3S-3Y	3	4.00
PCSB600-4S-2Y	4	5.28
PCSB600-5S-2Y	5	6.56
PCSB600-6S-2Y	6	7.84
PCSB600-8S-2Y	8	10.41
PCSB600-10S-1Y	10	12.97
PCSB600-12S-1Y	12	15.53
PCSB600-14S-1Y	14	18.09

NOTES:

- UL LISTED AND CSA APPROVED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- WIRE RANGE: 600 kcmil - #4 AWG. ONLY ONE CONDUCTOR PER PORT ALLOWED.
- STRIP LENGTH: 1.06 +.06/-0
- HEX KEY SIZE: 3/8", TIGHTENING TORQUE 375 IN-LB.
- VOLTAGE RATING: 600 V. MAX.
- TEMPERATURE RATING: 90° C.
- CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
- INSULATION MATERIAL IS CLEAR PVC.
- CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- ALL DIMENSIONS SHOWN ARE NOMINAL.
- PACKAGE QTY:
 - 4 = 4 PCS
 - 3 = 3 PCS
 - 2 = 2 PCS
 - 1 = 1 PC
- THIS PART IS ROHS COMPLIANT.

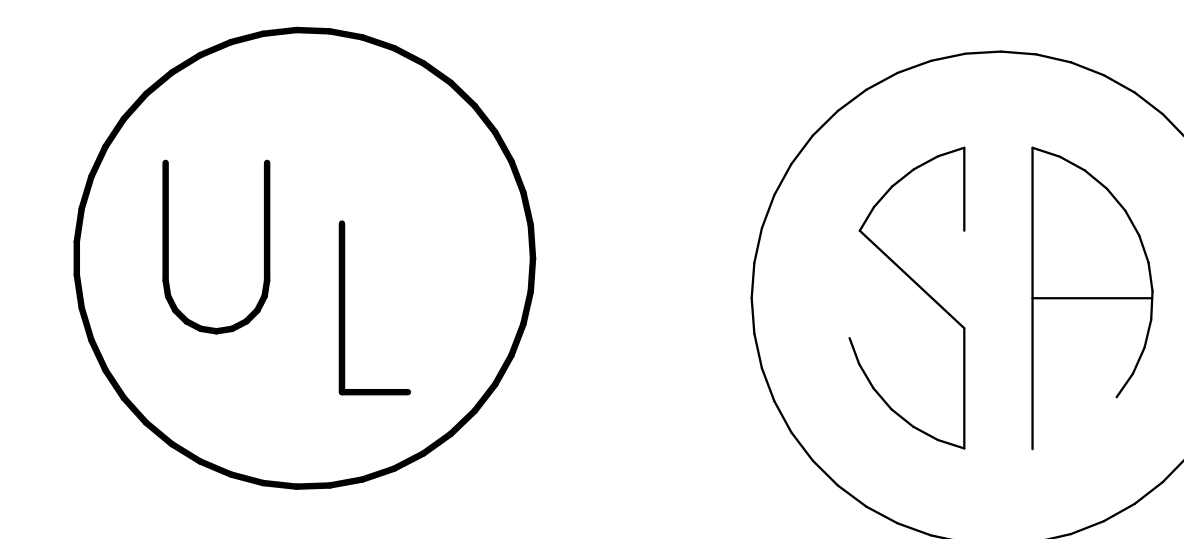

C41531_00

PANDUIT CORP.

TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTORS
PCSB 600 SINGLE SIDED SERIES

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00353		

DRAWN BY JHNU	CHK'D	SCALE N/A	DRAWING NO. C41531
------------------	-------	--------------	-----------------------