
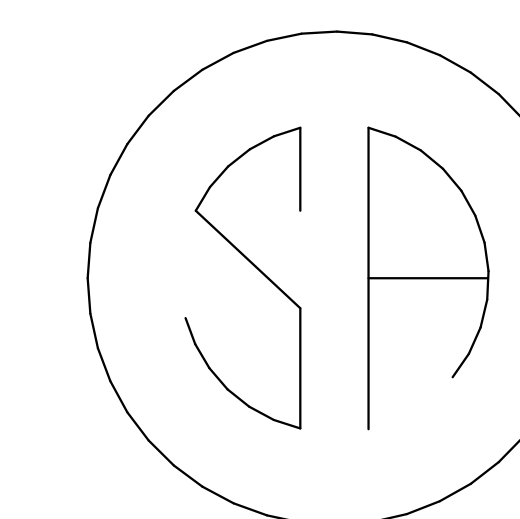


PART NUMBER	# CONDUCTOR PORTS	DIM "L"
PCSB2/0-10-2Y	10	6.89
PCSB2/0-12-2Y	12	8.24
PCSB2/0-14-1Y	14	9.58

NOTES:

- UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- WIRE RANGE: 2/0 - #14 AWG ONLY ONE CONDUCTOR PER PORT ALLOWED.
- STRIP LENGTH: .63 +.06/-0
- HEX KEY SIZE: 3/16", TIGHTENING TORQUE 120 IN-LB.
- VOLTAGE RATING: 600 V. MAX.
- TEMPERATURE RATING: 90° C.
- CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE INHIBITING COMPOUND.
- INSULATION MATERIAL IS CLEAR PVC.
- CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- ALL DIMENSIONS SHOWN ARE NOMINAL.
- PACKAGE QTY: -2 = 2 PCS  
-1 = 1 PC
- THIS PART IS ROHS COMPLIANT.

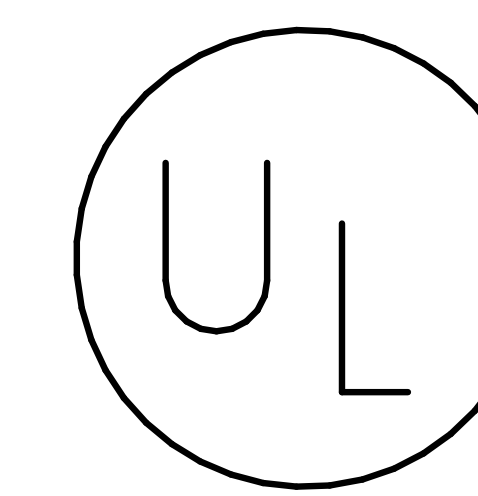

C41522\_00

**PANDUIT** CORP.

TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTORS  
PCSB 2/0 DOUBLE SIDED SERIES  
10, 12, & 14 PORTS

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
00	3/06	JHNU	LEM	DRAWING RELEASED- ROHS COMPLIANT	PC00353		

DRAWN BY JHNU	CHK'D	SCALE N/A	DRAWING NO. C41522
------------------	-------	--------------	-----------------------