


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

IDENTIFICATION LABEL

CONTACT	WIRE COLOR
1	WHITE/BLUE
2	BLUE
3	WHITE/ORANGE
4	ORANGE
5	WHITE/GREEN
6	GREEN
7	WHITE/BROWN
8	BROWN

- NOTES:  
 1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.  
 2. 110 CONNECTORS ON BOTH ENDS. THE PATCH CORDS CAN BE USED WITH PANDUIT PATCH CLIP CAP TO ENSURE PROPER WIRE SEQUENCE AND CONNECTION FOR APPLICATIONS WHICH MINIMIZE WIRE UNWISTING. CLOSE TO THE POINT OF TERMINATION WHICH MINIMIZES WIRE UNWISTING. INTEGRAL STRAIN RELIEF MINIMIZES STRESS ON WIRES DURING DISCONNECTION.  
 3. POLARIZED TO PREVENT REVERSE INSTALLATION TO CONNECTOR BLOCK.  
 4. CATEGORIZED BY UNSHIELDED WITHEDED FAIR CABLE WITH 24AWG STRANDED TINNED COPPER CONDUCTORS.  
 5. DIMENSIONS IN PARENTHESES ARE IN METRIC.

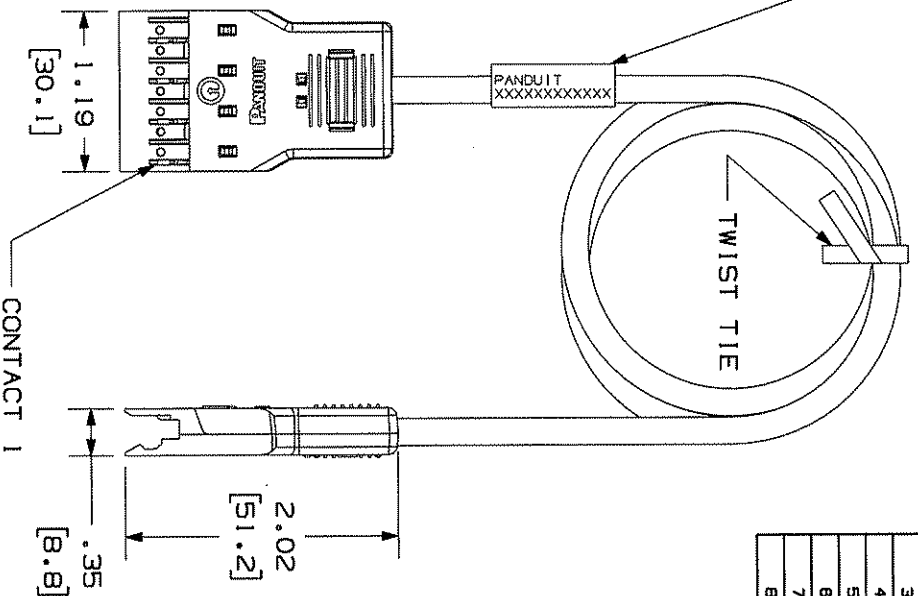

PANDUIT P/N	MIN. CABLE LENGTH	WEIGHT
P110PC4162Y	2 FT.	.83 LB./ 10 PCS (378.5 g./ 10PCS)
P110PC4163Y	3 FT.	1.05 LB./ 10 PCS (478.3 g./ 10PCS)
P110PC4164Y	4 FT.	1.25 LB./ 10 PCS (568.9 g./ 10PCS)
P110PC4165Y	5 FT.	1.48 LB./ 10 PCS (682.2 g./ 10PCS)
P110PC4166Y	6 FT.	1.67 LB./ 10 PCS (757.5 g./ 10PCS)
P110PC4167Y	7 FT.	1.82 LB./ 10 PCS (828.0 g./ 10PCS)
P110PC4168Y	8 FT.	2.09 LB./ 10 PCS (948.0 g./ 10PCS)
P110PC4169Y	9 FT.	2.30 LB./ 10 PCS (1043.9g./ 10PCS)
P110PC41612Y	12 FT.	2.93 LB./ 10 PCS (1328.0g./ 10PCS)
P110PC41615Y	15 FT.	3.58 LB./ 10 PCS (1614.8g./ 10PCS)
P110PC41618Y	18 FT.	4.19 LB./ 10 PCS (1900.6g./ 10PCS)
P110PC41619Y	18 FT.	.75 LB./ 10 PCS (342.0 g./ 10PCS)
P110PC41619Y	1M	1.09 LB./ 10 PCS (484.4 g./ 10PCS)
P110PC41619Y	1.5M	1.44 LB./ 10 PCS (653.2 g./ 10PCS)
P110PC41620Y	2M	1.79 LB./ 10 PCS (807.4 g./ 10PCS)
P110PC41630Y	3M	2.49 LB./ 10 PCS (1120.5g./ 10PCS)
P110PC41630Y	5M	3.95 LB./ 10 PCS (1748.1g./ 10PCS)

DRAWING FILENAME: M02479JUS\_DC255\_00A.PRT  
 TITLE: CATEGORY 5e 110 PATCHCORD CUSTOMER DRAWING  
 SIZE: A

**PANDUIT** R  
 TINELEY PARK, IL 60477  
 ALL DIMENSIONS ARE GIVEN UNLESS OTHERWISE SPECIFIED.  
 DIMENSIONAL TOLERANCES ARE:  
 1. .XX1 ± .031(.81) 1. XXX1 ± .010(.25)  
 1. .XX1 ± .010(.25) ANGLES ± .5°

DATE	3-17-06
DRAWN BY	NER
REVIEW DRAWING NUMBERS	
PRODUCT SPEC	
WORK INSTRUCTION	
SCALE	NONE
PART NO.	P110PC4****Y
DRAWING NO.	02479-255

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-17-06	NER	NER	RELEASED TO PRODUCTION.	02479-255		WAV		