
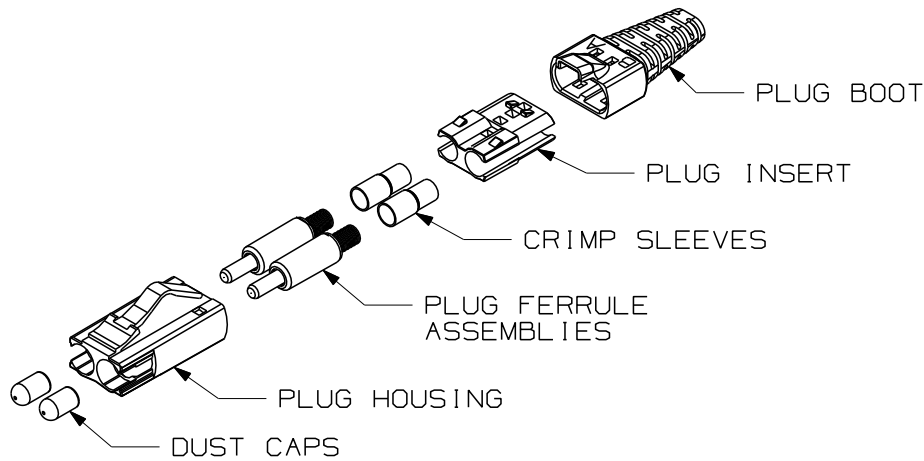
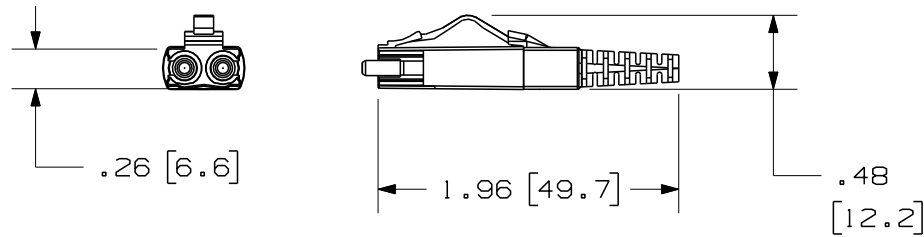


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

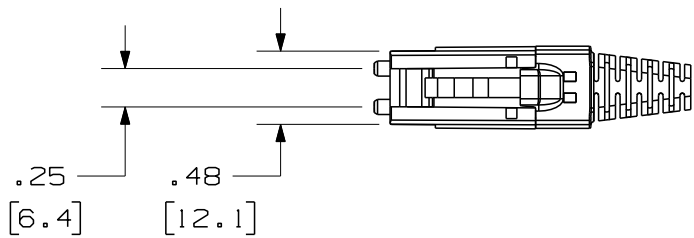

PANDUIT P/N	WEIGHT	FERRULE TYPE
NKMOP**	.098 LB/10 PCS. (44.5 G/10 PCS.)	ZIRCONIA (CERAMIC)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. FJ DUPLEX PLUG ACCEPTS HIGH PERFORMANCE 62.5/125 MICRON AND 50/125 MICRON MULTIMODE GLASS OPTICAL FIBER CABLE.
3. DESIGNED FOR SIMPLE FIELD TERMINATION.
4. THE MAXIMUM INSERTION LOSS PER CONNECTOR IS .35 dB.
5. OPERATING TEMPERATURE RANGE IS FROM -40° TO +70° C.
6. FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA-568-B3.
7. DIMENSIONS IN PARENTHESES ARE IN METRIC.

DRAWING FILENAME	M01302CK_DC_00A.prt	SIZE	A
------------------	---------------------	------	---

NETKEY FIBER OPTIC CONNECTOR
MULTIMODE FJ DUPLEX PLUG
(NKMOP**) CUSTOMER DRAWING

<p>PANDUITTM CORP. TINLEY PARK, ILL 60477</p>	I.I. NUMBER			
	PRODUCT SPEC			
<p>THIRD ANGLE PROJECTION</p>	WORK INSTRUCTION			
	SCALE	NONE		
DRAWN BY	MC	REVIEW DRAWING NUMBERS	PART NO.	NKMOP**
DATE	03-12-02		DRAWING NO.	01302-37
CHK'D				

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	03-12-02	MC		RELEASED TO PRODUCTION	01302-37				