




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:


1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. MATERIAL:  
 OUTER HOUSING: PLASTIC  
 BOOTS: THERMOPLASTIC RUBBER  
 FERRULE: ZIRCONIA CERAMIC  
 HARDWARE: BRASS
3. FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED BY TIA/EIA-568-B.3.
4. COMPATIBLE WITH TIA-EIA-604-3 (FOCIS-3)
5. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
6. DIMENSIONS IN BRACKETS ARE METRIC [mm]

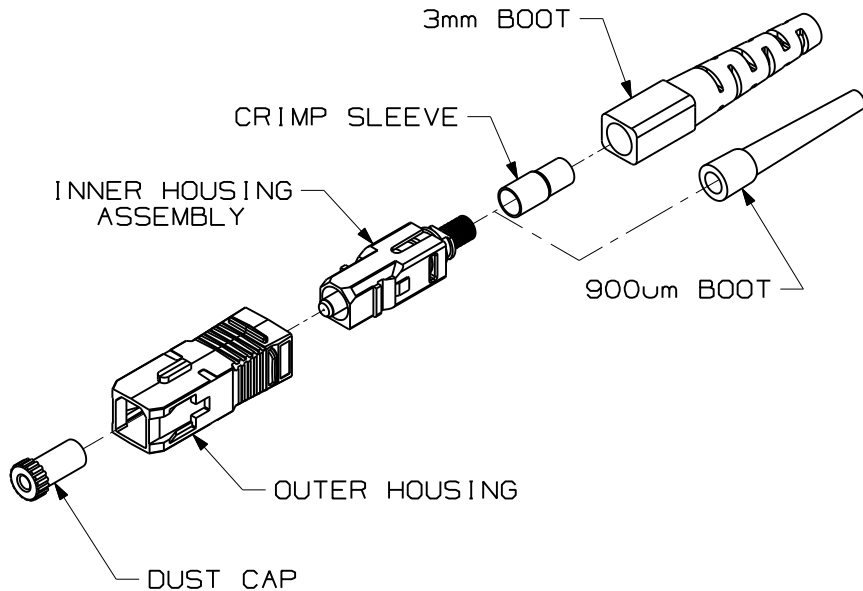

PANDUIT PART NUMBER	APPLICATION	BOOT COLOR	WEIGHT
NKFSCMWH	62.5/125 OM1	WHITE	.090 lb/10 pcs [ 40.8g/10 pcs ]
NKFSCMBL	50/125 OM2	BLACK	
NKFSCMAQ	50/125 OM3	AQUA	
NKFSCSWH	9/125 OS1/OS2	WHITE	

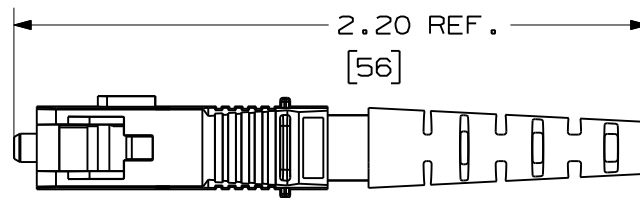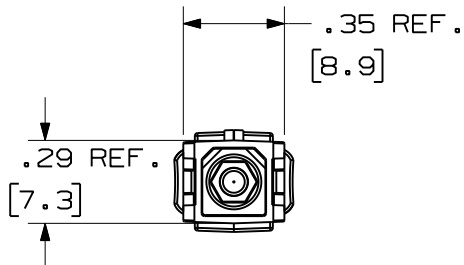


**SC CONNECTOR WITH 3mm BOOT**  
(SHOWN WITHOUT DUST CAP)

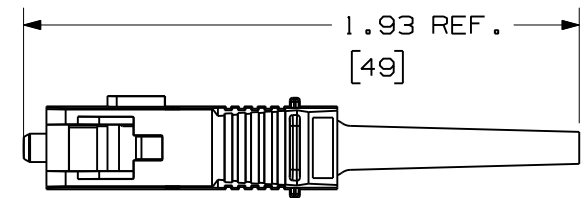

**SC CONNECTOR WITH 900um BOOT**  
(SHOWN WITHOUT DUST CAP)

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	12-21-09	EFK		RELEASED TO PRODUCTION	01302-67				

NETKEY FIBER OPTIC SINGLEMODE/MULTIMODE  
SIMPLEX SC CONNECTOR  
CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES  
UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.015

THIRD ANGLE PROJECTION

DRAWN BY: EFK  
DATE: 12-21-09  
CHK'D:

DRAWING FILENAME: M01302AB\_DC/00A  
SCALE: NONE  
PART NO.: NKFSCM\*\*  
NKFSCS\*\*  
DRAWING NO.: 01302-67  
SIZE: A