





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

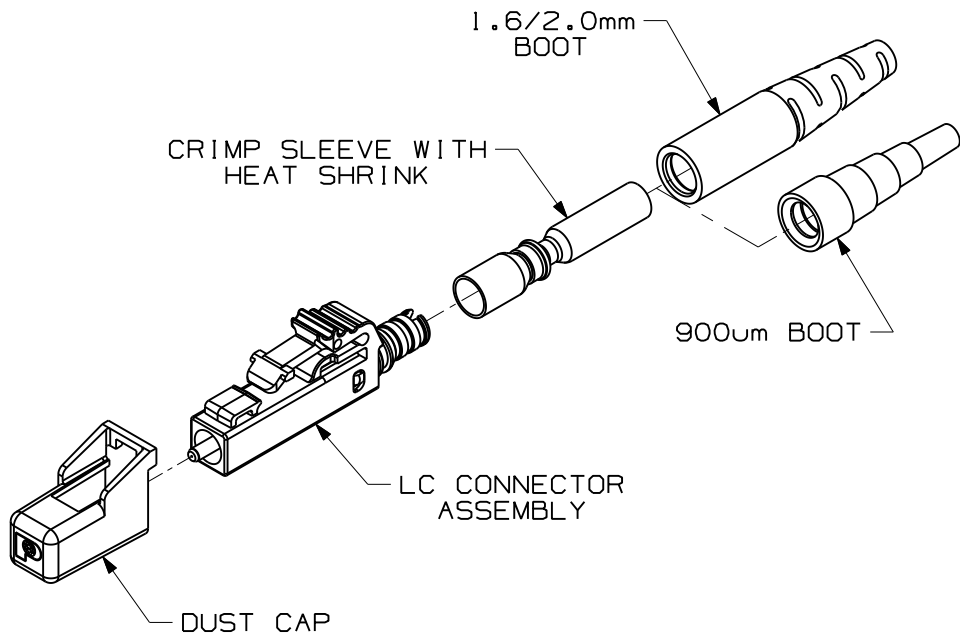

**NOTES:**


1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. MATERIAL:  
BODY/HARDWARE: PLASTIC  
BOOTS: THERMOPLASTIC RUBBER  
FERRULE: ZIRCONIA CERAMIC
3. FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED BY TIA/EIA-568-B.3.
4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
5. DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

PANDUIT PART NUMBER	APPLICATION	BOOT COLOR	WEIGHT
NKFLCSMWH	62.5/125 OM1	WHITE	.037 lb/10 pcs [ 16.7g/10 pcs ]
NKFLCSMBL	50/125 OM2	BLACK	
NKFLCSMAQ	50/125 OM3	AQUA	
NKFLCSSWH	9/125 OS1/OS2	WHITE	

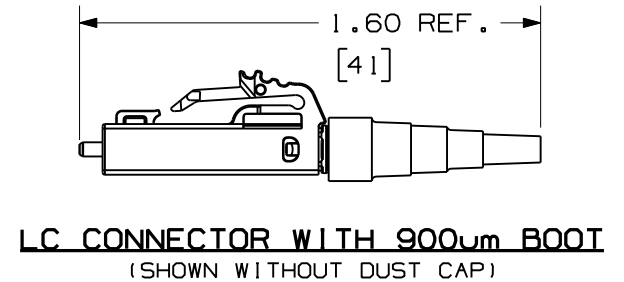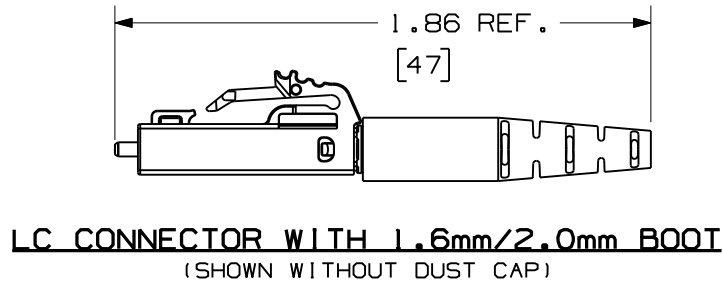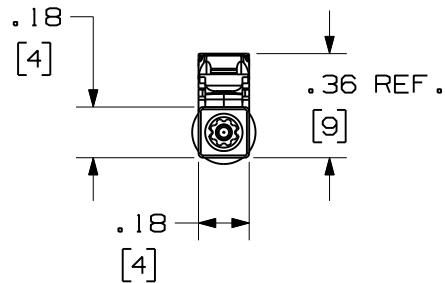

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	12-21-09	EFK		RELEASED TO PRODUCTION	01302-65				

NETKEY FIBER OPTIC SINGLEMODE/MULTIMODE  
SIMPLEX LC CONNECTOR  
CUSTOMER DRAWING



**PANDUIT**™  
CORP.  
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES  
UNLESS OTHERWISE SPECIFIED.  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±.03 (0.8) ANGLES  
(.XXX) ±.010 (0.3)

THIRD ANGLE PROJECTION

DRAWN BY: EFK  
DATE: 12-21-09  
CHK'D:

DRAWING FILENAME: M01302AC\_DC/00A  
SCALE: NONE  
PART NO.: NKFLCSM\*\*  
NKFLCSS\*\*  
DRAWING NO.: 01302-65  
SIZE: A