


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NO.	MATERIAL	"A" +/- .062	"B" +/- .062	LABELS PER ROW	LABELS PER PKG.
N050X150CBT	GMC4	1.500 [38.1]	1.600 [40.6]	7	2500
N050X175CBT	GMC4	1.750 [44.5]	1.800 [45.7]	7	2500

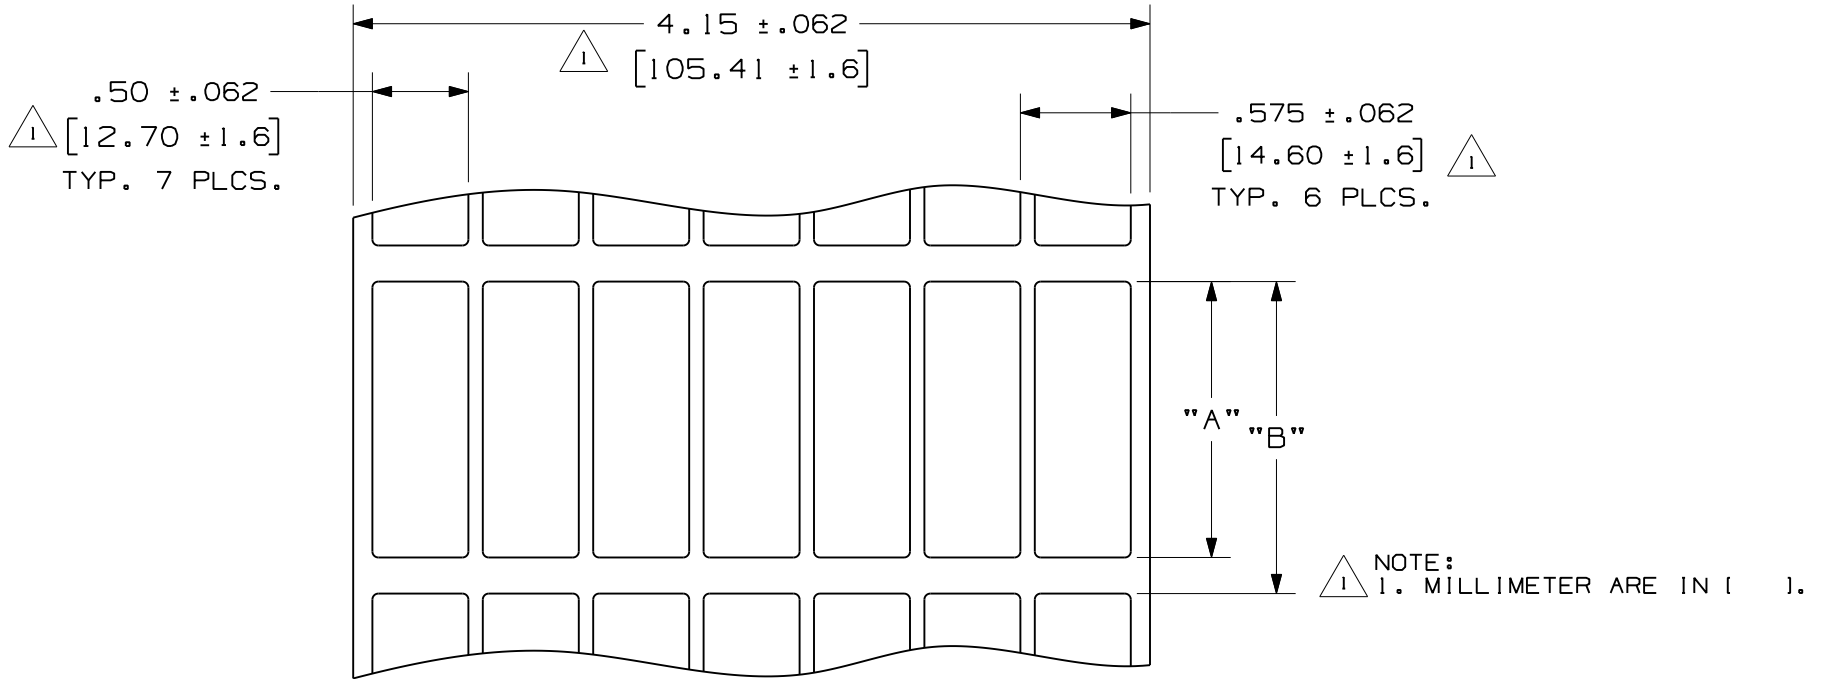

CAD FILENAME/LAYERS
100472JS_C10296_N050XNUMCBT_00.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

OPTIMUM N050X***CBT
THERMAL TRANSFER LABELS

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .12 (.XXX) ± .025
(.XX) ± .062 ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
1	7/9/09	RVU		GMC4 WAS GMC. ADD +/- .062. REMOVE NOTE 1. INCORRECT TOLERANCES.	5792	R		
0	10-1-04	RVU		DRAWING RELEASED.	0000	R		

DRAWN BY RVU	MAT'L:	SCALE NTS
DATE 10-1-04	SEE TABLE	DRAWING NO. C10296
CHK'D		DWG A SIZE