


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MTRT MAX BUNDLE DIAMETER	PTRT MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [7]
MRT2DH-L4	50	2.0" [51]	2.4" [61]	18.5" [470]
MRT4DH-L4	50	4.0" [102]	4.4" [112]	31.1" (790)

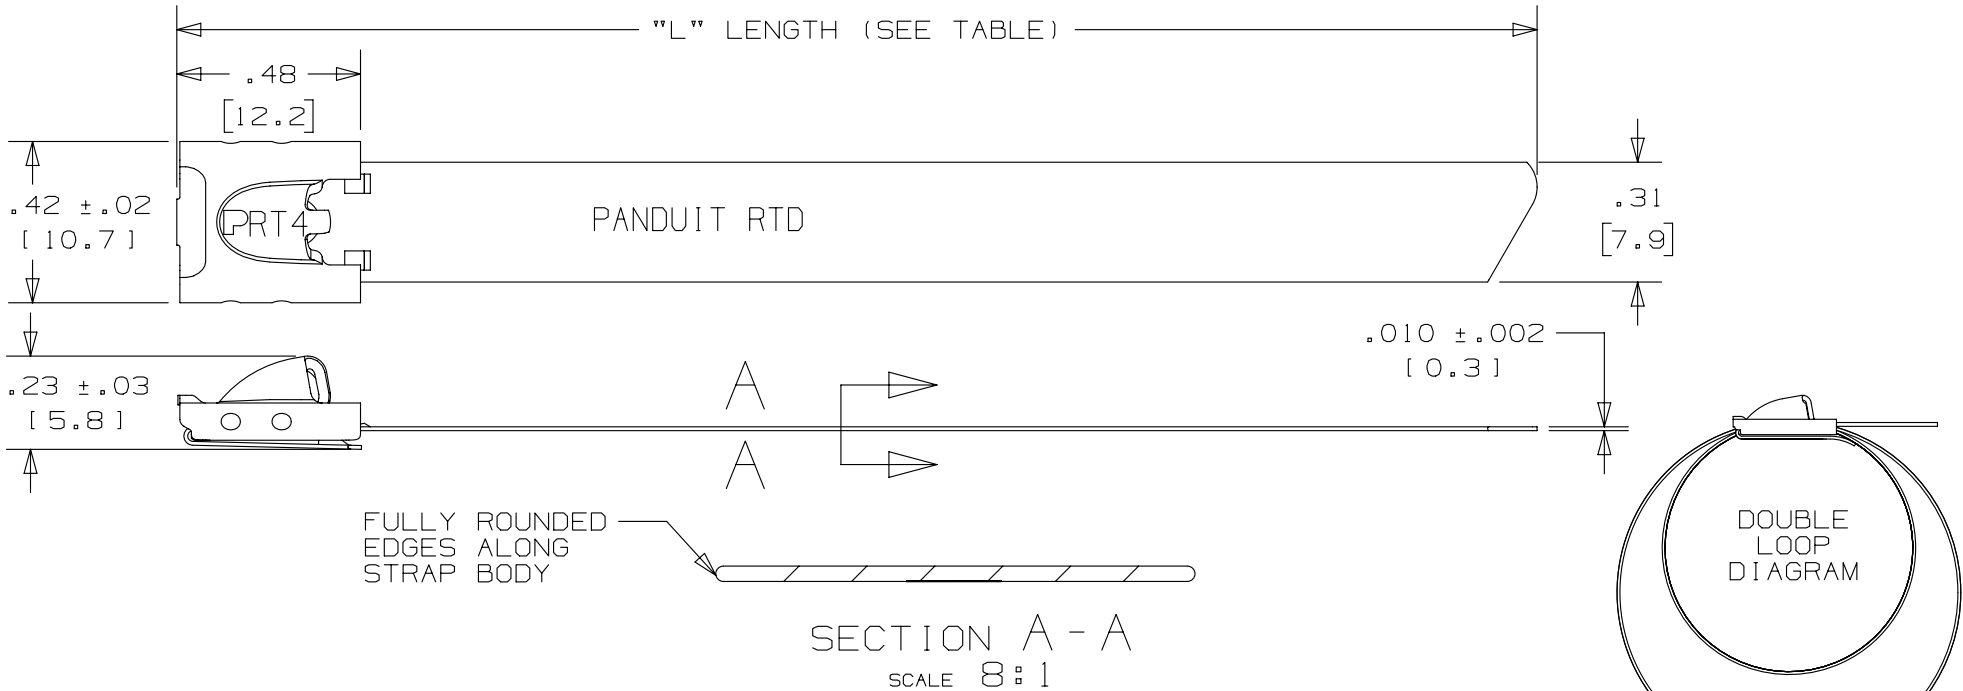

NOTES:

1. APPLICATION TOOLS - PTRT, MTRTH OR MTRTLS (WITH KMTRTH KIT)
2. MINIMUM LOOP TENSILE STRENGTH - 550 lbs [2447 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEELnote #3

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

TITLE		METAL TIE - HEAVY SERIES DOUBLE LOOP - RETAINED TENSION	
CUSTOMER DRAWING			
ITEM REVISION NAME		N41239BS/08	
DATASET FILE NAME		N41239BS_DC/08A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xxx ± .005 [.127]		304 STAINLESS STEEL	
.xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		N41239BS_DC	
DRAWN BY	DATE	CHK	SCALE
JAMB	5/06	EJD	2:1
SHT 1 OF 1		SIZE	
A		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
07A	3/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOOVN FOR REFERENCE ONLY	-----