


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MTRT MAX BUNDLE DIAMETER	PTRT MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [ 7 ]
MRT1.5DS-C4	100	1.5" [ 38 ]	1.9" [ 48 ]	15.4" [ 391 ]
MRT2.5DS-C4	100	2.5" [ 63 ]	2.9" [ 73 ]	21.7" [ 551 ]

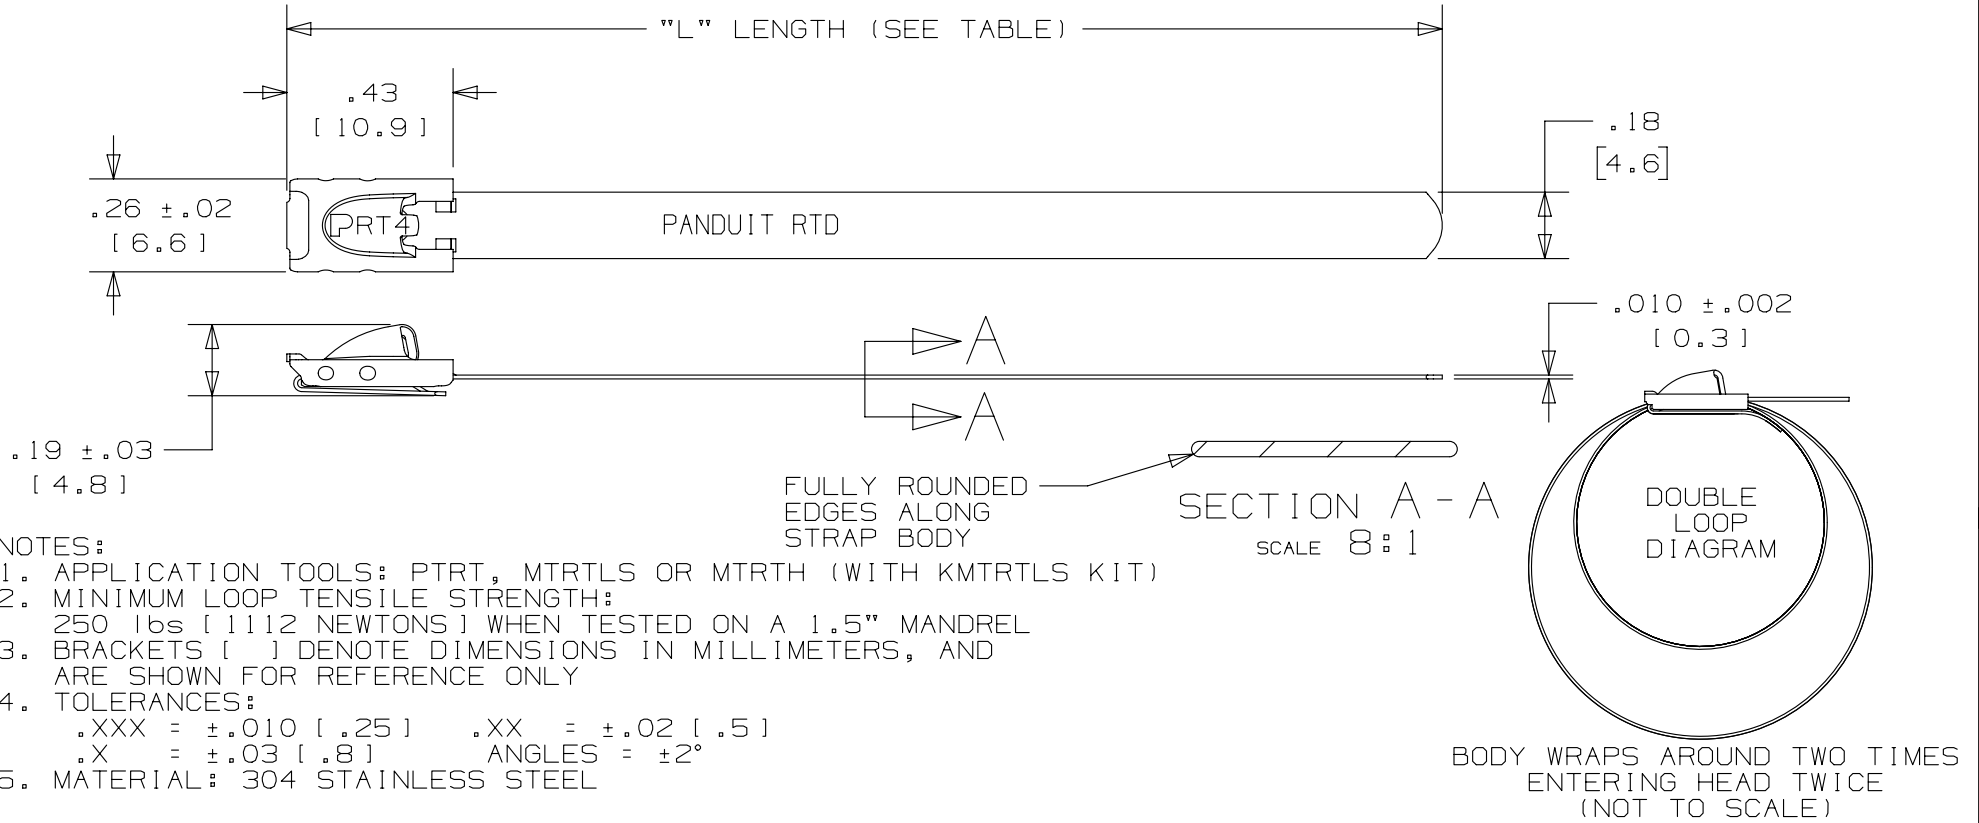

- NOTES:
- APPLICATION TOOLS: PTRT, MTRTLS OR MTRTH (WITH KMTRTLS KIT)
  - MINIMUM LOOP TENSILE STRENGTH: 250 lbs [ 1112 NEWTONS ] WHEN TESTED ON A 1.5" MANDREL
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:
    - .xxx = ±.010 [ .25 ]    .xx = ±.02 [ .5 ]
    - .x = ±.03 [ .8 ]    ANGLES = ±2°
  - MATERIAL: 304 STAINLESS STEEL

TITLE	
<b>METAL TIE - STANDARD SERIES DOUBLE LOOP - RETAINED TENSION</b>	
CUSTOMER DRAWING	
ITEM REVISION NAME	N41247BS/09
DATASET FILE NAME	N41247BS_DC/09A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]	
.x ± .1 [ 2.54 ]	.xxx ± .005 [ .127 ]
.xx ± .01 [ .25 ]	ANGLES ± 5 °
THIRD ANGLE PROJECTION	
MATERIAL: <b>304 STAINLESS STEEL</b>	
DRAWING NUMBER: N41247BS_DC	
DRAWN BY	JAMB
DATE	
CHK	EJD
SCALE	2:1
SHT 1 OF 1	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
08A	3/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----