


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER MRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [7]
MRT1.5LH-L4	50	1.5" [38]	2.3" [58]	10.6" [269]
MRT2LH-L4	50	2" [51]	2.8" [71]	12.2" [310]
MRT4LH-L4	50	4" [102]	4.8" [122]	18.5" [470]
MRT6LH-L4	50	6" [152]	6.8" [172]	24.8" [630]

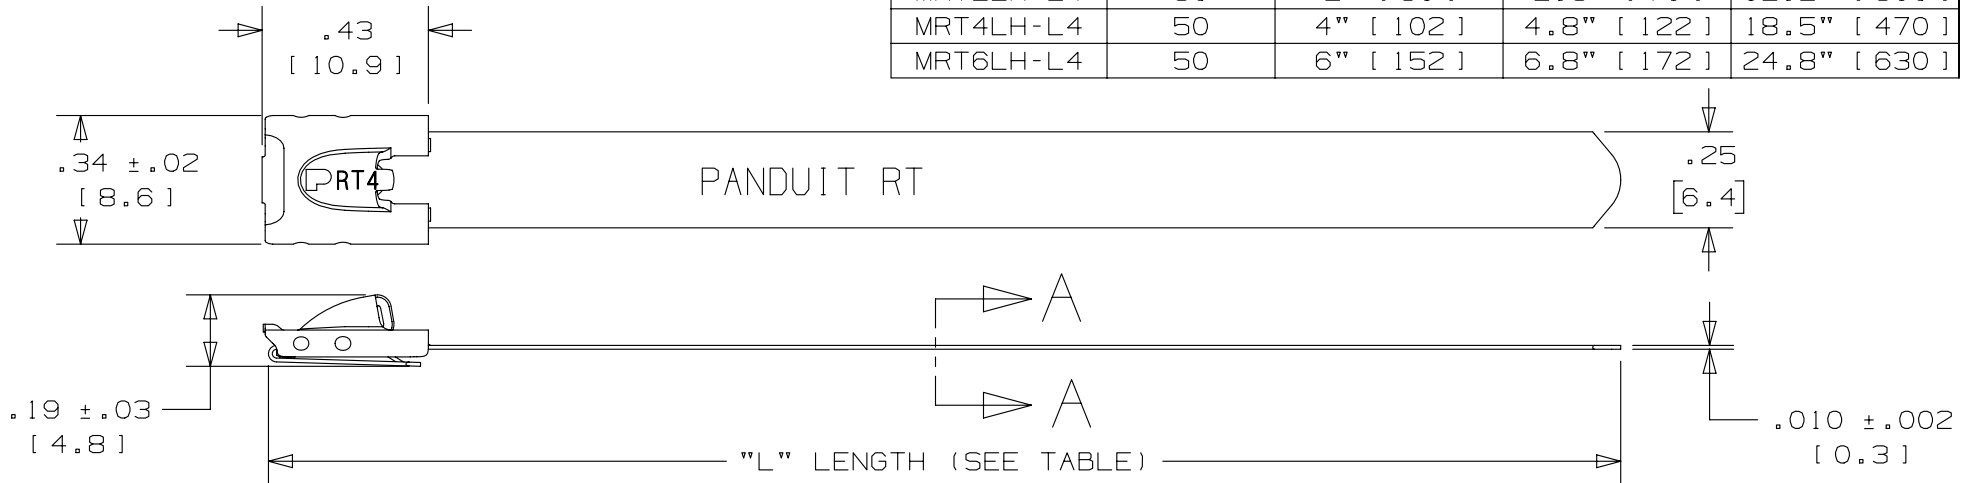

NOTES:

1. APPLICATION TOOLS - MRTLS & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 225 LBS. [1000 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

SECTION A - A
SCALE 8:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				MATERIAL:	
							METAL TIE - LIGHT/HEAVY SERIES RETAINED TENSION				PANDUIT	
							CUSTOMER DRAWING					
							ITEM REVISION NAME N41249BS/06				304 STAINLESS STEEL	
							DATASET FILE NAME N41249BS_DC/06A					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °					
06A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056	THIRD ANGLE PROJECTION				DRAWING NUMBER: N41249BS_DC	
05A	3/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	DRAWN BY JAMB	DATE 5/06	CHK EJD	SCALE 2:1	SHT 1 OF 1	
											A	