



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [ 7 ]
MRT1.5H-L4	50	1.5" [ 38 ]	2.3" [ 58 ]	10.6" (269)
MRT2H-L4	50	2.0" [ 51 ]	2.8" [ 71 ]	12.2" (310)
MRT4H-L4	50	4.0" [ 102 ]	4.8" [ 122 ]	18.5" (470)
MRT6H-L4	50	6.0" [ 152 ]	6.8" [ 172 ]	24.8" (630)

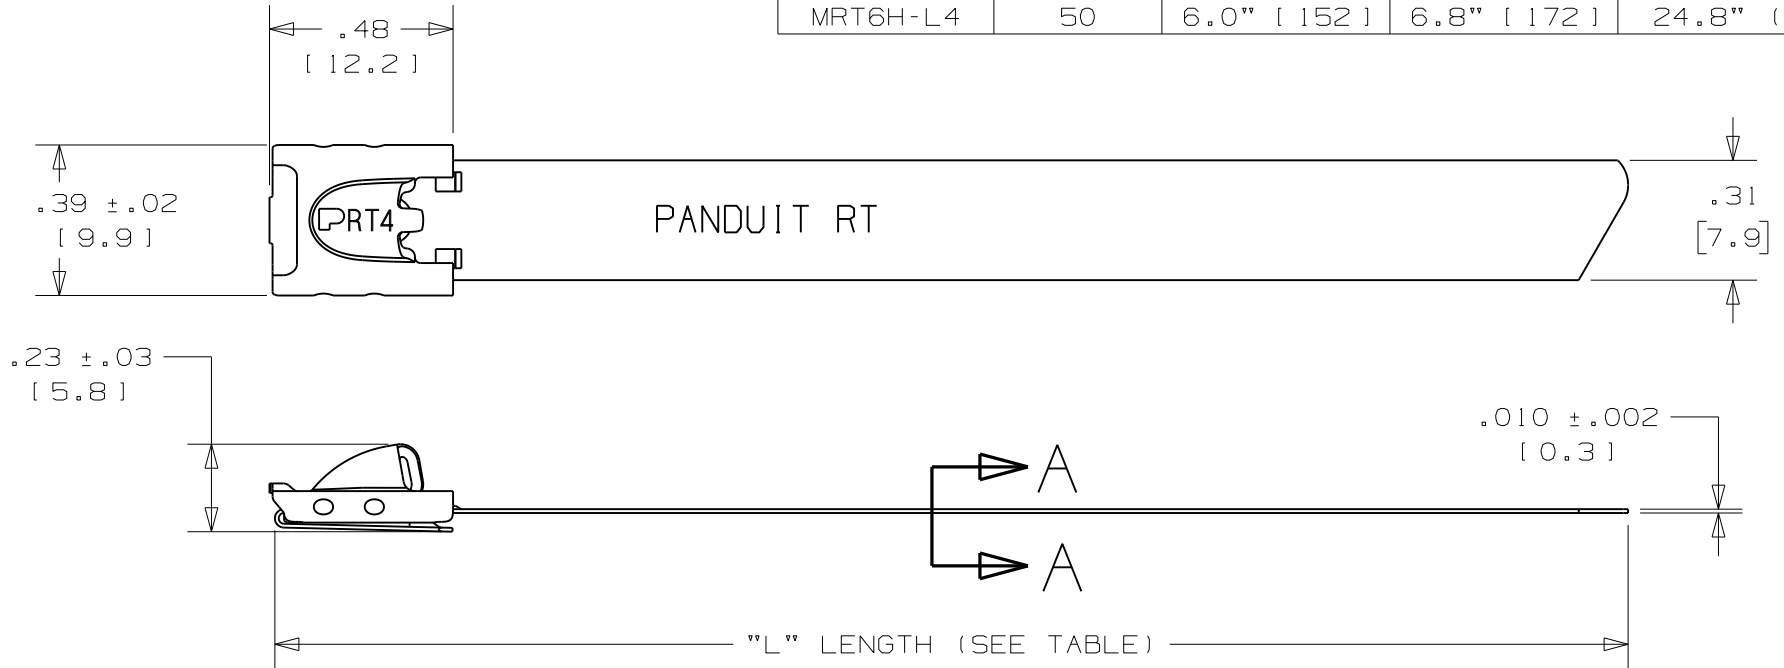


SECTION A - A  
SCALE 8:1

NOTES:

- APPLICATION TOOLS - MTRTH & PTRT
- MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- TOLERANCES:  

.XXX = ±.010 [ .25 ]	.XX = ±.02 [ .5 ]
.X = ±.03 [ .8 ]	ANGLES = ±2°
- MATERIAL: 304 STAINLESS STEEL

						TINLEY PARK, ILLINOIS		
				METAL TIE - HEAVY SERIES RETAINED TENSION - 304 STAINLESS STEEL CUSTOMER DRAWING				
10A	3/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY				
REV	DATE	BY	CHK	DESCRIPTION	DRAWN BY	CHK'D	SCALE	DRAWING NO.
					JAMB	EJD	2:1	N41235BS_DC