
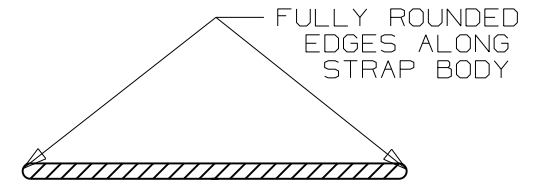
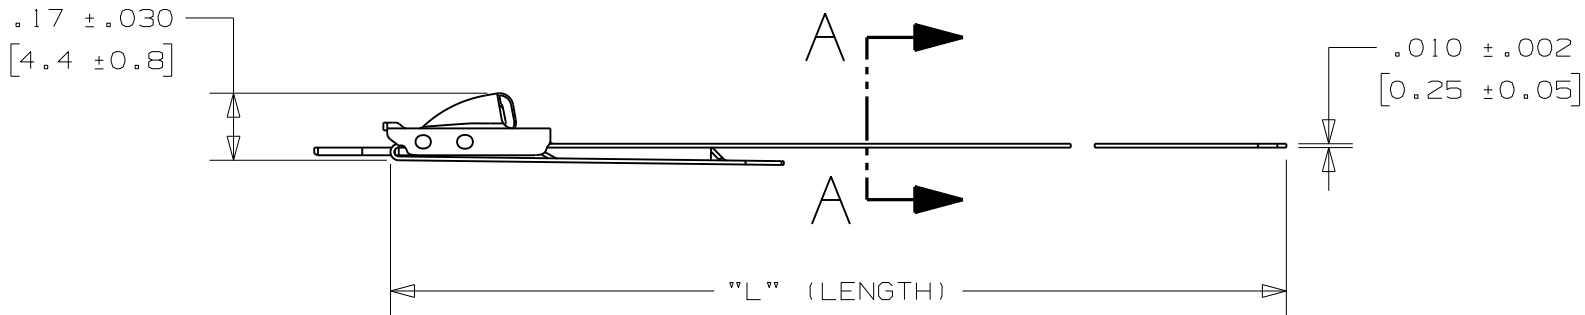


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NO. | PACKAGE QTY | MAX BUNDLE DIAMETER | LENGTH "L" +/- .3" [ 7 ] |
|------------------|-------------|---------------------|--------------------------|
| MRS1.5LH-L6      | 50          | 1.5" [ 38 ]         | 10.6" (269)              |
| MRS2LH-L6        | 50          | 2.0" [ 51 ]         | 12.2" (310)              |
| MRS4LH-L6        | 50          | 4.0" [ 102 ]        | 18.5" (470)              |
| MRS6LH-L6        | 50          | 6.0" [ 152 ]        | 24.8" (630)              |

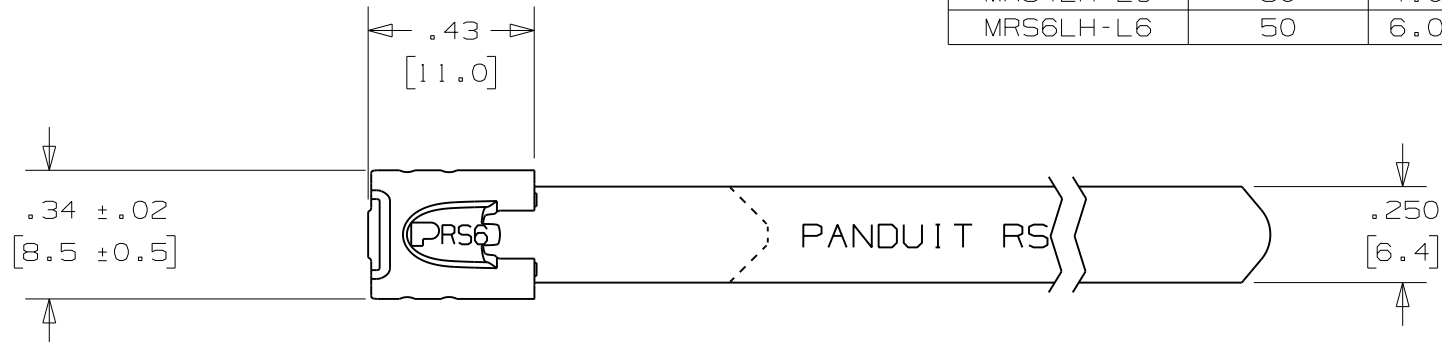


SECTION A - A  
SCALE 8:1

NOTES:

1. APPLICATION TOOLS - MRTLS & PRT
2. MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. [ ] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]      ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

|     |       |     |     |  |
|-----|-------|-----|-----|--|
| 04A | 10/09 | MIM | SKB | REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE |
| REV | DATE  | BY  | CHK | DESCRIPTION  |

TM



TINLEY PARK, ILLINOIS

**METAL TIE - LIGHT-HEAVY SERIES**  
**RETAINED TENSION - 360° RADIAL SEAL**  
**316 STAINLESS STEEL - CUSTOMER DRAWING**

|                  |              |              |                            |
|------------------|--------------|--------------|----------------------------|
| DRAWN BY<br>JAMB | CHK'D<br>EJD | SCALE<br>2:1 | DRAWING NO.<br>N41262BS_DC |
|------------------|--------------|--------------|----------------------------|