
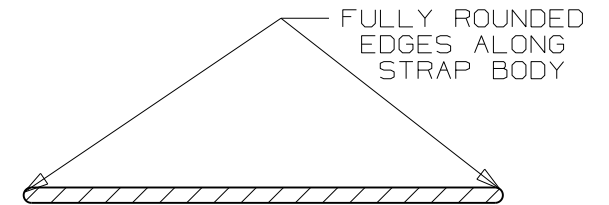
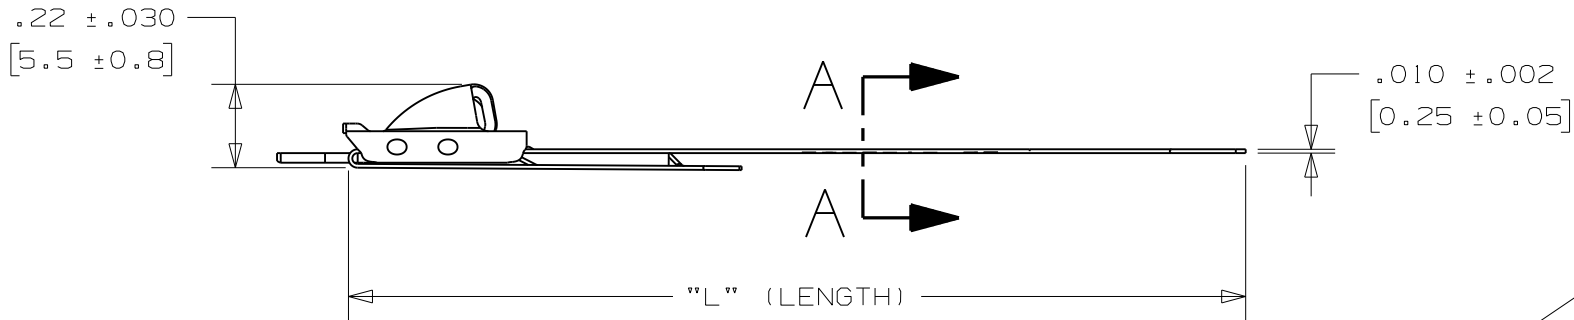


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [ 7 ]
MRS1.5H-L6	50	1.5" [ 38 ]	10.6" (269)
MRS2H-L6	50	2.0" [ 51 ]	12.2" (310)
MRS4H-L6	50	4.0" [ 102 ]	18.5" (470)
MRS6H-L6	50	6.0" [ 152 ]	24.8" (630)

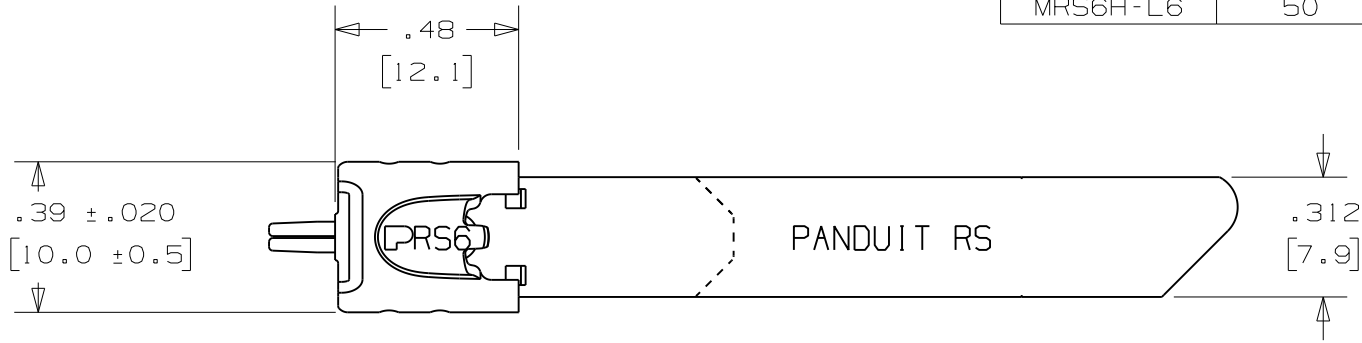

SECTION A - A  
SCALE 8:1

NOTES:

1. APPLICATION TOOLS - MTRTH & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
3. [ ] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]      ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

						 TINLEY PARK, ILLINOIS
						METAL TIE - HEAVY SERIES RETAINED TENSION - 360° RADIAL SEAL 316 STAINLESS STEEL - CUSTOMER DRAWING
04A	10/09	MIM	SKB	REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE		
REV	DATE	BY	CHK	DESCRIPTION		DRAWN BY: JAMB CHK'D: EJD SCALE: 2:1 DRAWING NO.: N41228BS_DC