
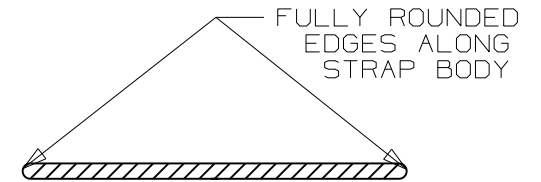
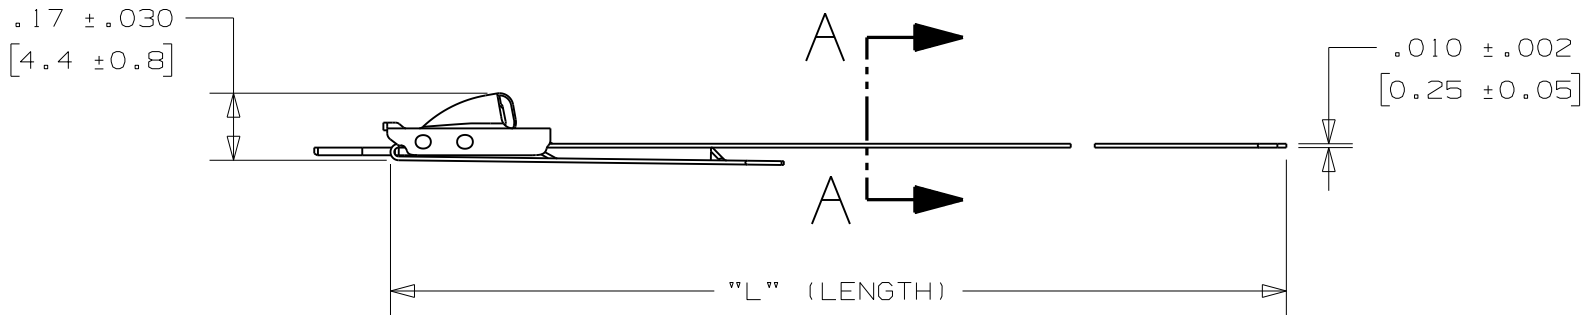


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [ 7 ]
MRS1.5LH-L6	50	1.5" [ 38 ]	10.6" (269)
MRS2LH-L6	50	2.0" [ 51 ]	12.2" (310)
MRS4LH-L6	50	4.0" [ 102 ]	18.5" (470)
MRS6LH-L6	50	6.0" [ 152 ]	24.8" (630)

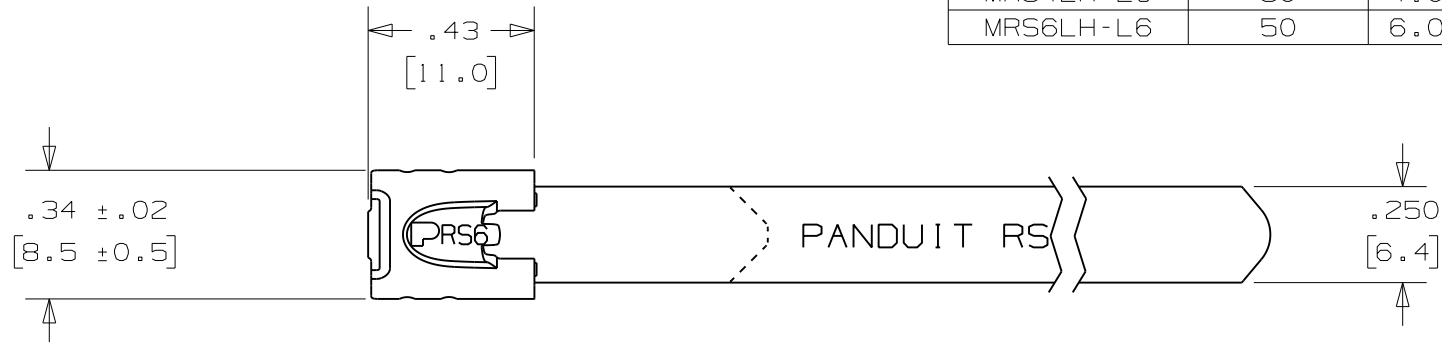

SECTION A - A  
SCALE 8:1


NOTES:

- APPLICATION TOOLS - MRTLS & PRT
- MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- [ ] DENOTES DIMENSION IN MILLIMETERS
- TOLERANCES:  

.XXX = ±.010 [ .25 ]	.XX = ±.02 [ .5 ]
.X = ±.03 [ .8 ]	ANGLES = ±2°
- MATERIAL: 316 STAINLESS STEEL

04A10/09MIMSKB	REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE			
REV	DATE	BY	CHK	DESCRIPTION

TM



TINLEY PARK, ILLINOIS

**METAL TIE - LIGHT-HEAVY SERIES**  
**RETAINED TENSION - 360° RADIAL SEAL**  
**316 STAINLESS STEEL - CUSTOMER DRAWING**

DRAWN BY JAMB	CHK'D EJD	SCALE 2:1	DRAWING NO. N41262BS_DC
------------------	--------------	--------------	----------------------------