
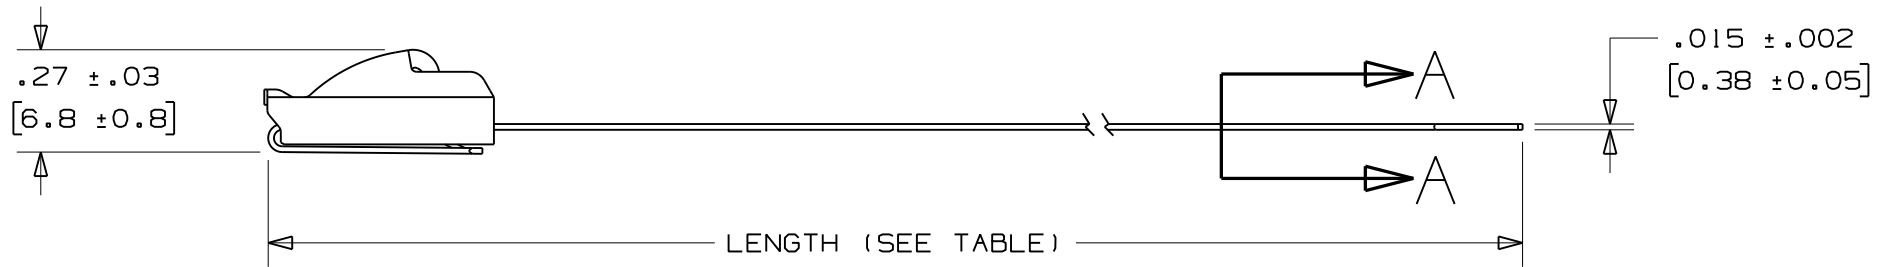



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NO. | MAX. BUNDLE DIA. | PACKAGE QTY. | LENGTH +/- .3" [7] |
|------------------|------------------|--------------|----------------------|
| MLT4EH15-LP | 4" [102] | 50 | 17.1" [434] |
| MLT6EH15-LP | 6" [152] | 50 | 23.4" [594] |
| MLT8EH15-LP | 8" [203] | 50 | 29.7" [754] |
| MLT10EH15-LP | 10" [254] | 50 | 35.9" [912] |
| MLT12EH15-Q | 12" [305] | 25 | 42.2" [1072] |

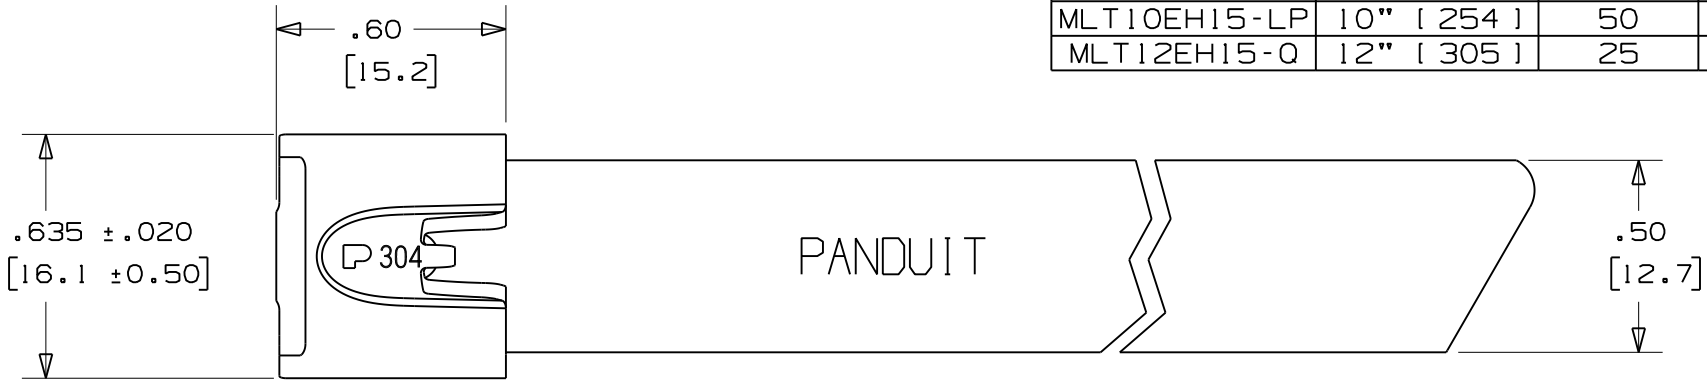

NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 700 LBS. (3115 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

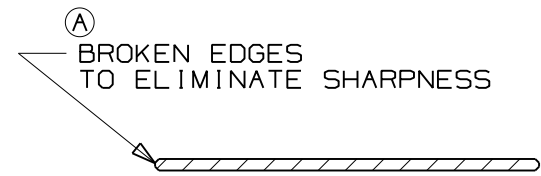

SECTION A - A
SCALE: 4x

N41157BS_DC/01A

| | | | | | | | | | | |
|-----|-------|------|-----|--|--|--|-------|-----|--|----------------------------|
| | | | | | | | | | TINLEY PARK, ILLINOIS METAL LOCKING TIE EXTRA HEAVY DUTY 304 STAINLESS STEEL CUSTOMER DRAWING | |
| 01A | 10/08 | JAMB | SKB | ORIG CAD FILE SPEC WAS S41157_01 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT | | | | | | |
| 01 | 8/04 | JAMB | DPN | A REMOVED "AISI NO.5" | | | 11907 | CCH | JJB | |
| 00 | 1/04 | JAMB | DPN | RELEASED | | | 11307 | CCH | JJB | |
| REV | DATE | BY | CHK | DESCRIPTION | | | ECN # | PM | CUST | DRAWN BY JAMB |
| | | | | | | | | | | CHK'D DPN |
| | | | | | | | | | | SCALE 2x |
| | | | | | | | | | | DRAWING NO. N41157BS_DC |