
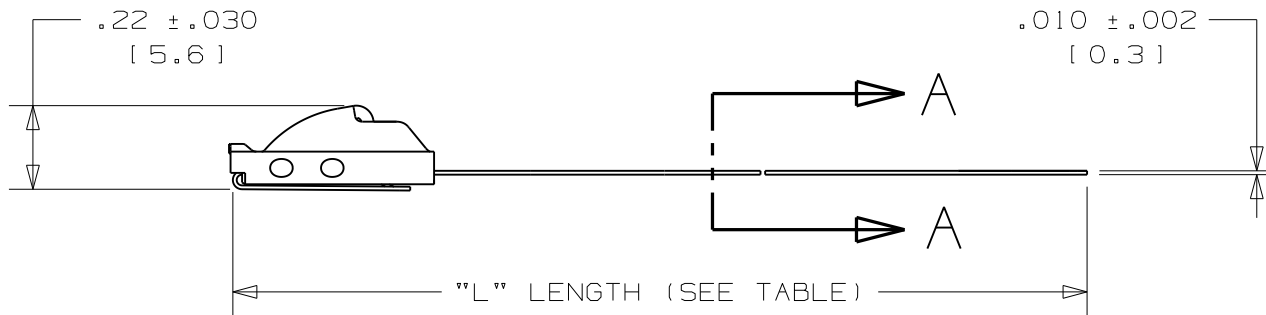
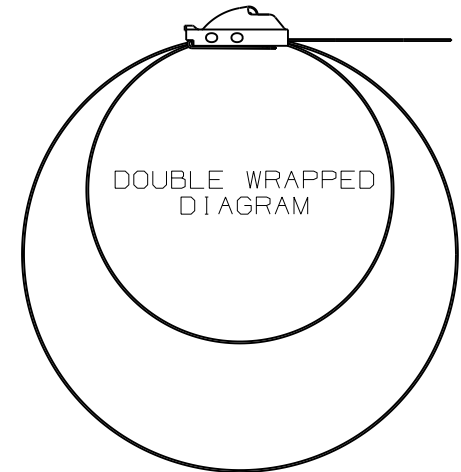



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH L ±.2 [5]
MLT2DH-L	50	2" [ 50 ]	18.5" [ 470 ]
MLT4DH-L	50	4" [ 101 ]	28.0" [ 711 ]
MLT5DH-L	50	5" [ 127 ]	34.0" [ 863 ]
MLT6DH-Q	25	6" [ 152 ]	40.0" [ 1016 ]

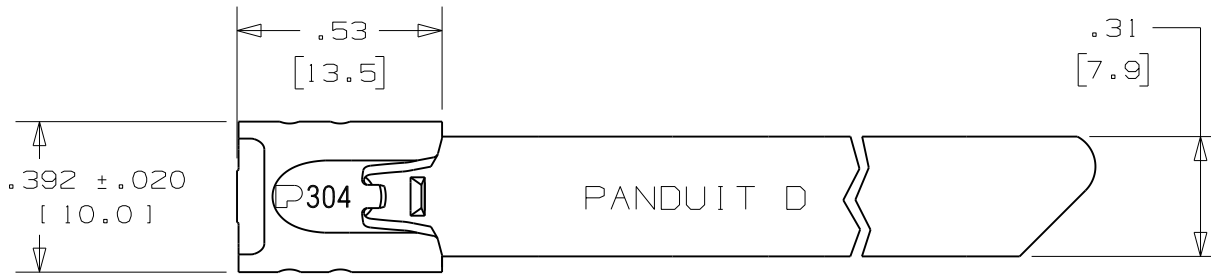

BODY WRAPS AROUND TWO TIMES  
ENTERING HEAD TWICE  
(NOT TO SCALE)

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
  - MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]      ANGLES = ±2°
  - MATERIAL: 304 STAINLESS STEEL

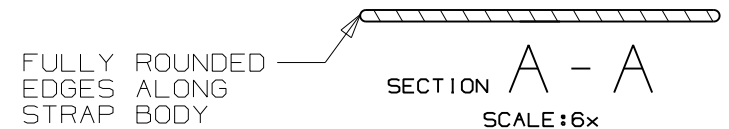

				<b>PANDUIT</b> CORP.      TINLEY PARK, ILLINOIS				
				DOUBLE WRAPPED METAL LOCKING TIE HEAVY SERIES -304 STAINLESS STEEL				
04A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY				
REV	DATE	BY	CHK	DESCRIPTION	DRAWN BY	CHK'D	SCALE	DRAWING NO.
					JAMB	DPN	2x	N41142BS_DC