
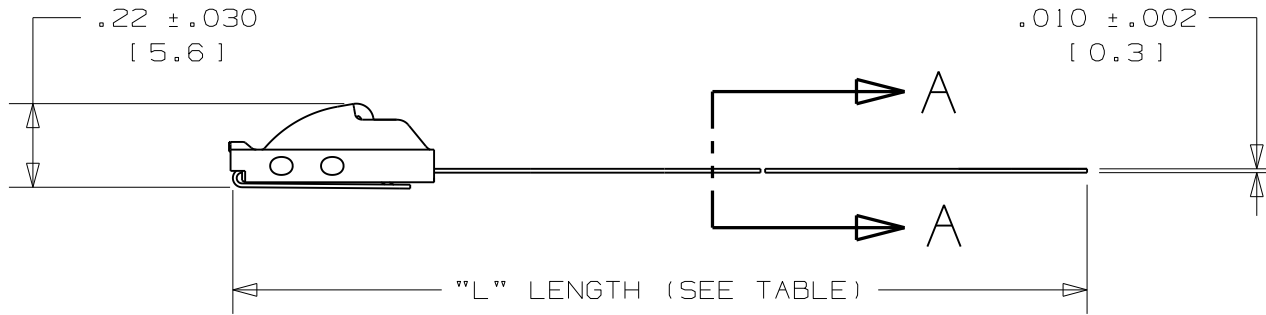
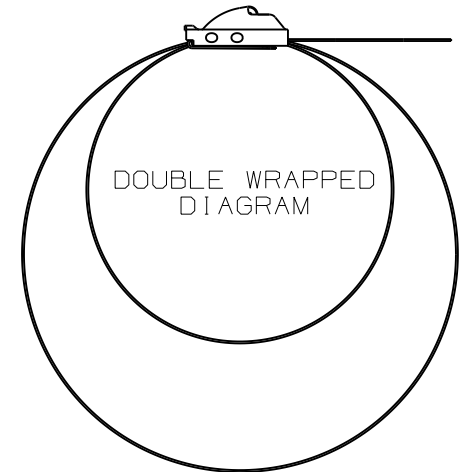



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH L ±.2 [5]
MLT2DH-L	50	2" [50]	18.5" [470]
MLT4DH-L	50	4" [101]	28.0" [711]
MLT5DH-L	50	5" [127]	34.0" [863]
MLT6DH-Q	25	6" [152]	40.0" [1016]

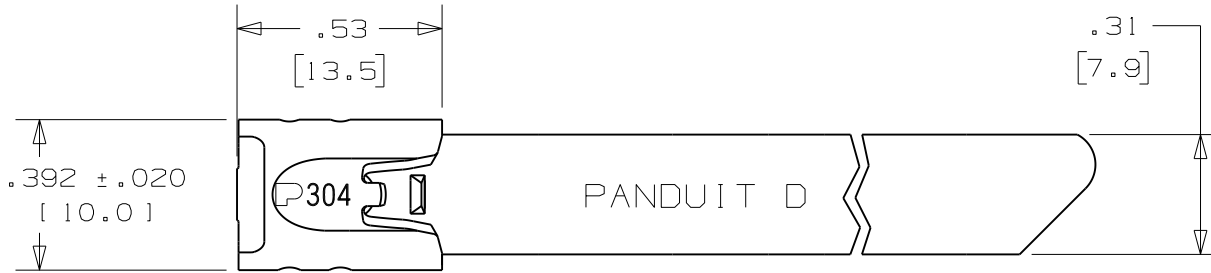

BODY WRAPS AROUND TWO TIMES
ENTERING HEAD TWICE
(NOT TO SCALE)

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
 - MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
 - BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 - TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
 - MATERIAL: 304 STAINLESS STEEL

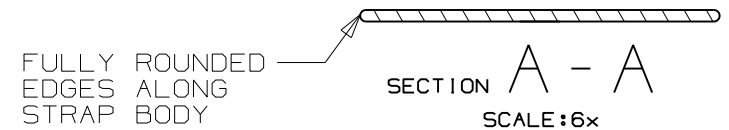

04A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY
REV	DATE	BY	CHK	DESCRIPTION

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

DOUBLE WRAPPED METAL LOCKING TIE
HEAVY SERIES -304 STAINLESS STEEL

DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. N41142BS_DC
------------------	--------------	-------------	----------------------------