


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/- .3" [ 7 ]
⑧ MLT2EH-LP316	2" [ 51 ]	50	11.8" [ 300 ]
MLT4EH-LP316	4" [ 102 ]	50	17.1" [ 434 ]
MLT6EH-LP316	6" [ 152 ]	50	23.4" [ 594 ]
MLT8EH-LP316	8" [ 203 ]	50	29.7" [ 754 ]

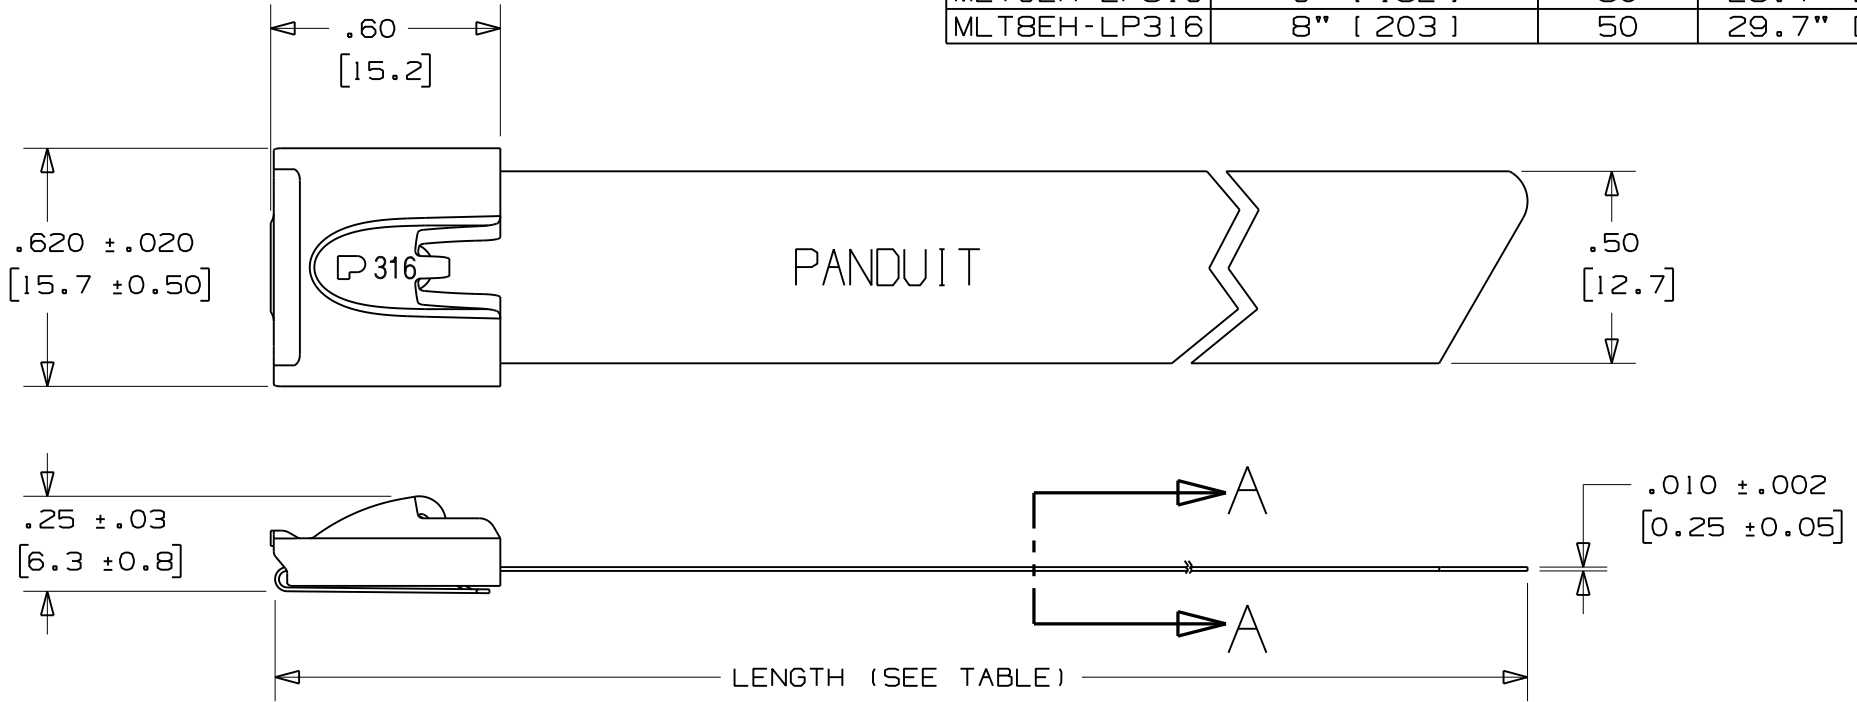


NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]  
 .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]  
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL



SECTION A - A  
SCALE: 4x

N41156BS\_DC/02A

02A	10/08	JAMB	SKB	ORIG CAD FILE SPEC WAS S41156_02 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT				 CORP. TINLEY PARK, ILLINOIS  METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL - CUSTOMER DRAWING
02	9/05	JAMB	EJD	⑧ ADDED PART NO. MLT2EH-LP316 TO TABLE	SS00061	---	---	
01	8/04	JAMB	DPN	① REMOVED "AISI NO.1 FULL RADIUS" & REPLACED WITH "FULLY ROUNDED"	11907	CCH	JJB	
00	1/04	JAMB	DPN	RELEASED	11307	CCH	JJB	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	
		JAMB	DPN					DRAWN BY: JAMB CHK'D: DPN SCALE: 2x DRAWING NO.: N41156BS_DC