THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	"L" LENGTH +/-.3" [7]
MLT2EH-LP	2" [51]	50	11.8" [300]
MLT4EH-LP	4" [102]	50	17.1" [434]
MLT6EH-LP	6" [152]	50	23.4" [594]
MLT8EH-LP	8" [203]	50	29.7" [754]
MLT10EH-LP	10" [254]	50	35.9" [912]
MLT12EH-Q	12" [305]	25	42.2" [1072]

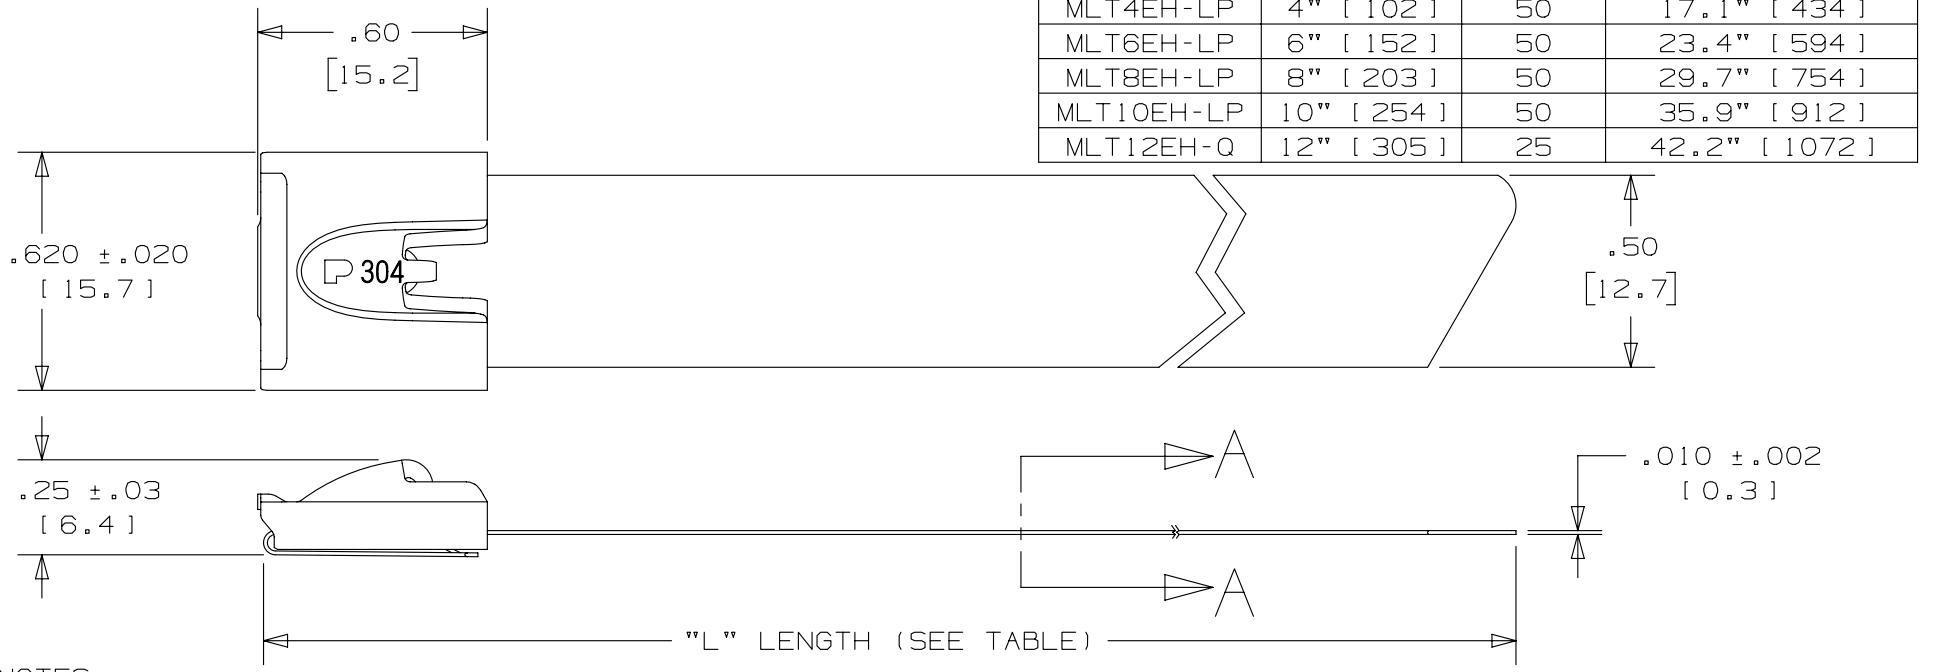

NOTES:
1. APPLICATION TOOLS - ST2MT, RT2HT, RT2HTN & PBTMT
2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS.(2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.02 [.5]
   .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL



SECTION A-A
SCALE: 4x

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	02/13	JAMB	SKB	RGRO	UPDATE DRAWING TO NEW PANDUIT TITLE BLOCK AND PANDUIT LOGO REMOVED APPLICATION TOOL ST3MT, ADDED ST2MT TOOL	SSECN01028
03A	2/12	MIM	RGRO	---	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE
METAL LOCKING TIE EXTRA HEAVY DUTY 304 STAINLESS STEEL
CUSTOMER DRAWING

ITEM REVISION NAME: N41155BS/04

DATASET FILE NAME: N41155BS_DC/04A

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .03 [.8] .XXX ± .010 [.25]
.XX ± .02 [.5] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: N41155BS_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAMB	01/04	DPN	2:1		A