



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MINIMUM BUNDLE DIAMETER	MAXIMUM BUNDLE DIAMETER	LENGTH = L ±.2 [5]
MLT2.7WH-LP	50	2.0" [ 50 ]		10.2" [ 259 ]
MLT4WH-LP	50	2.0" [ 50 ]	4.0" [ 102 ]	14.3" [ 362 ]
MLT6WH-LP	50	2.0" [ 50 ]	6.0" [ 152 ]	20.5" [ 521 ]
MLT8WH-LP	50	2.0" [ 50 ]	8.0" [ 203 ]	26.8" [ 679 ]
MLT10WH-LP	50	2.0" [ 50 ]	10.0" [ 254 ]	33.0" [ 838 ]
MLT2.7WH-TL	250	2.0" [ 50 ]	2.7" [ 69 ]	10.2" [ 259 ]
MLT4WH-TL	250	2.0" [ 50 ]	4.0" [ 102 ]	14.3" [ 362 ]
MLT6WH-TL	250	2.0" [ 50 ]	6.0" [ 152 ]	20.5" [ 521 ]

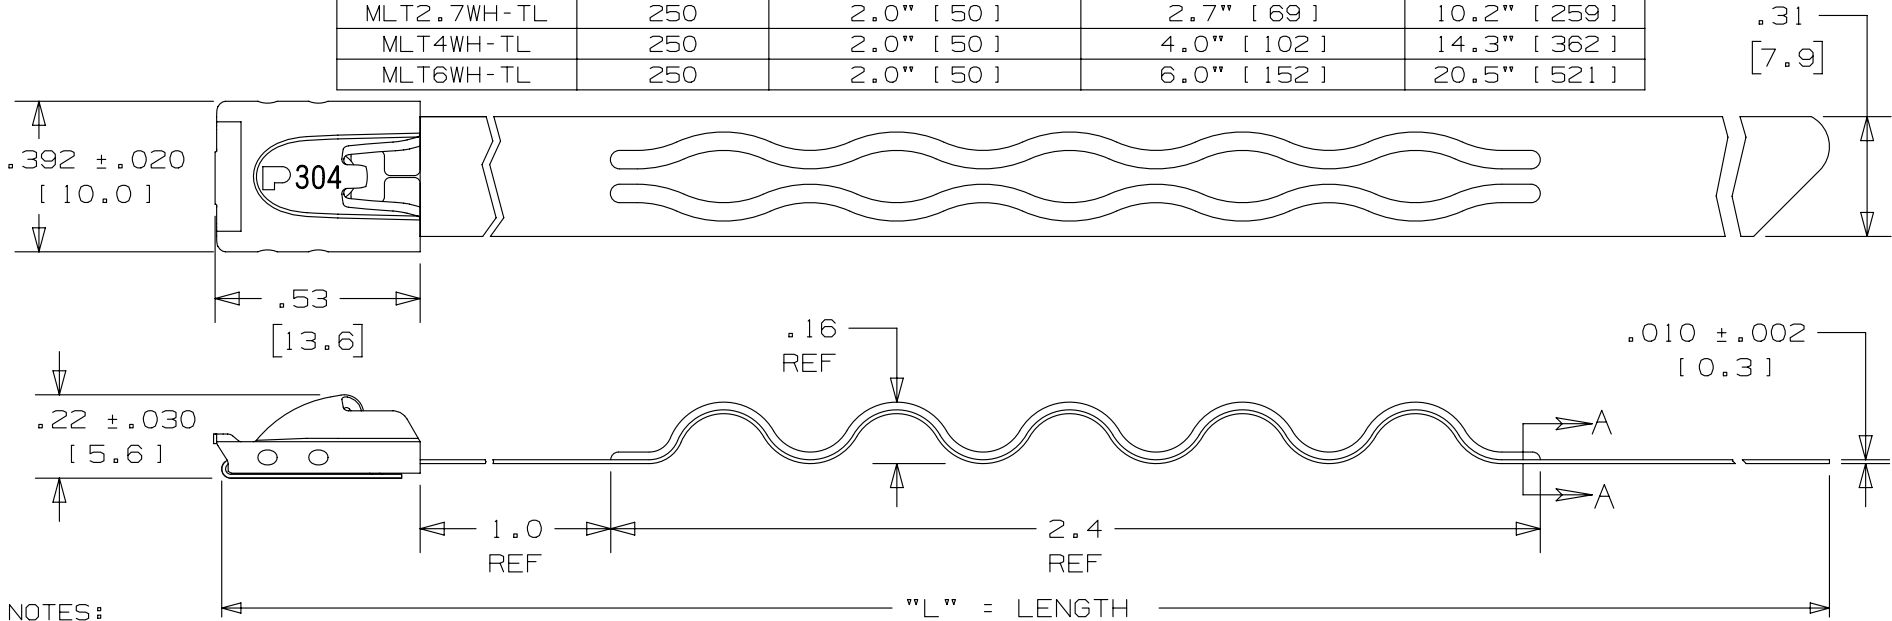

- NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT
  2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS (2000 NEWTONS) WHEN TESTED ON A 3" MANDREL EXCEPT MLT2.7WH-LP WHEN TESTED ON A 1 1/2" MANDREL.
  3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]    .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]        ANGLES = ±2°
  5. MATERIAL: 304 STAINLESS STEEL



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
06A	6/12	JAMB	RGRO	RGRO	NOTE #1 REMOVED APPLICATION TOOL ST3MT, TOOL IS OBSOLETE	-----
05A	2/12	JAMB	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE <b>METAL LOCKING TIE HEAVY SERIES                  WAVE-TY 304 STAINLESS STEEL</b>		CUSTOMER DRAWING	
ITEM REVISION NAME N41122BS/07			
DATASET FILE NAME N41122BS_DC/07A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL: <b>304 STAINLESS STEEL</b>	
.x ± .1 [ 2.54 ]        .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °		DRAWING NUMBER: N41122BS_DC	
		THIRD ANGLE PROJECTION	
DRAWN BY JAMB	DATE 2/12	CHK DPN	SCALE 2:1
SHT 1 OF 1		SIZE A	