THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

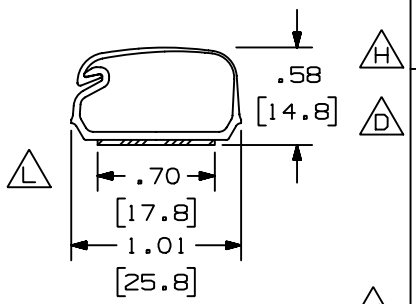


| PART NAME | PANDUIT PART NUMBER (SEE NOTE 1) | LENGTH IN. (MM.) | STATIC LOAD (SEE NOTE 2) | APPROX. WEIGHT |
|---|---|---|---|---|
| LATCHING DUCT | LD5**6-A | 72.0±.09 (1829±2.3) | △F .39 lbs/in (7.0 g/mm) | △G .089 lbs/ft (.133 g/mm) |
| | LD5**8-A | 96.0±.09 (2438±2.3) | .39 lbs/in (7.0 g/mm) | .089 lbs/ft (.133 g/mm) |
| | LD5**10-A | 120.0±.09 (3048±2.3) | .39 lbs/in (7.0 g/mm) | .089 lbs/ft (.133 g/mm) |
| | LD5**2-A | 78.74±.09 (2000.0±2.3) | .39 lbs/in (7.0 g/mm) | .089 lbs/ft (.133 g/mm) |
| | LD5**3-A | 118.11±.09 (3000.0±2.3) | .39 lbs/in (7.0 g/mm) | .089 lbs/ft (.133 g/mm) |

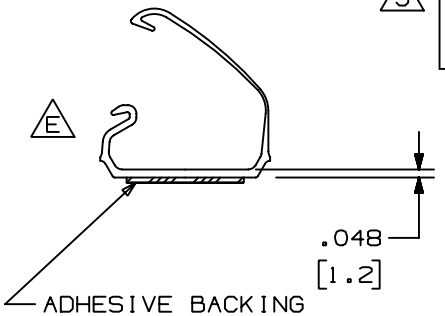


△H △C △K

NOTES:
1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. PART IS DESIGNED TO SUPPORT MAXIMUM WEIGHT ON A CLEAN, DRY, SMOOTH SURFACE. THE SURFACE MUST BE PROPERLY PREPARED IN ACCORDANCE WITH PANDUIT RECOMMENDATIONS.
3. TO APPLY PART:
   a. REMOVE PROTECTIVE LINER.
   b. PLACE PART IN DESIRED LOCATION.
   c. APPLY PRESSURE TO FLAT SURFACE OF PART.

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WIH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

DIMENSIONS IN PARENTHESES ARE IN METRIC.

| REV | DATE | BY | CHK | DESCRIPTION | ECN | CHK | CUST | SUP |
|---|---|---|---|---|---|---|---|---|
| 14 | 6-12-03 | JBN | RMHI | M. CAD FILE WAS D15247BA_LD5_01<br>L. REVISED TAPE WIDTH: WAS .80 [20.3] | SS-15247 | RGRO | RGRO | |
| 13 | 11-19-98 | DW | HIW | K. REVISED NOTE 2.<br>J. ADDED LD5**2-A AND LD5**3-A TO CHART. | SS-15247 | HIW | HIW | |
| 12 | 2-13-98 | PM | HIW | I. FILE NAME WAS WPXD-LATCHING-DUCT-2<br>H. REVISED CHART AND NOTES | SS-15247 | HIW | HIW | |
| - | -------- | -- | -- | G. REV'D WEIGHT: WAS .070 LB/FT .104 G/MM | -------- | -- | -- | |
| 11 | 1-20-97 | JBA | CEF | F. REV'D STATIC LOAD: WAS .46.<br>E. REV'D DUCT TO SHOW NEW DESIGN. | SS-15247 | CEF | CEF | |
| - | -------- | -- | -- | D. OMIT LATCHING CLIP LC5-A FROM DWG. REFER TO 34348-1 FOR LATCH CLIP DWG. | -------- | -- | | |
| 10 | 4-24-92 | DEW | CEF | C. REV'D NOTE 1 AND OMIT COLOR FROM DWG.<br>B. ADDED THCKNESS DIMENSION .043. | SS-15247 | CEF | | |
| 9 | 11-25-87 | LDB | WJB | A. ADDED PARTS LD5EI-A & LD5LI6-A. | SS-15247 | | | |
| 8 | 2-12-87 | RN | | REVISED AND REDRAWN | SS-15247 | | | |

CAD FILENAME/LAYERS △M △I D15247BA_DC_LD5_02A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

# LATCHING DUCT (LD5)

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .010(.3)
(.XX) ±.03(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY RS

MAT'L: RIGID PVC (POLYVINYL CHLORIDE)

SCALE NONE

DATE 2-19-79

DRAWING NO. SS-15247

DWG A

SIZE

CHECKED BY HVP