

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 800 kcmil |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 3.0 in. |
| Stud Size | 5/8 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | ORANGE |
| Panduit Die Index No. on Barrel | P107 |
| Alternate Industry Die Index No. () on Barrel | (25) |



CERTIFIED



LISTED Wire Connector

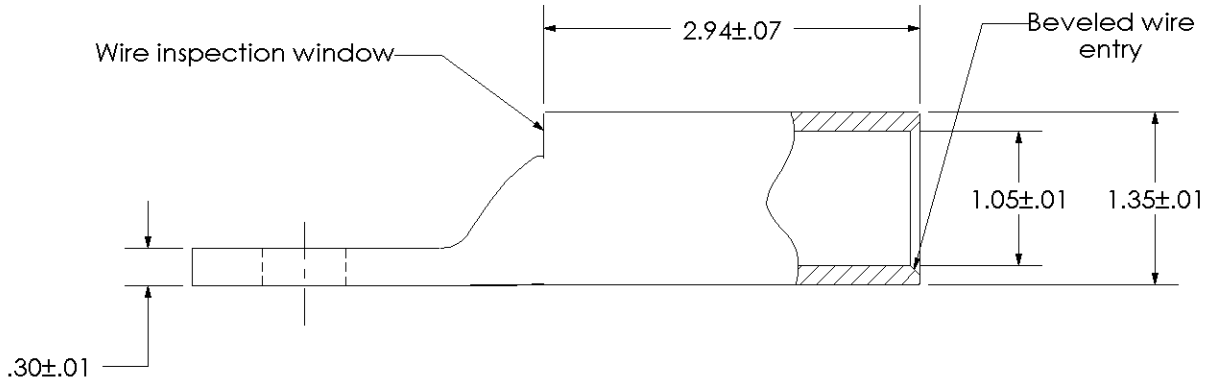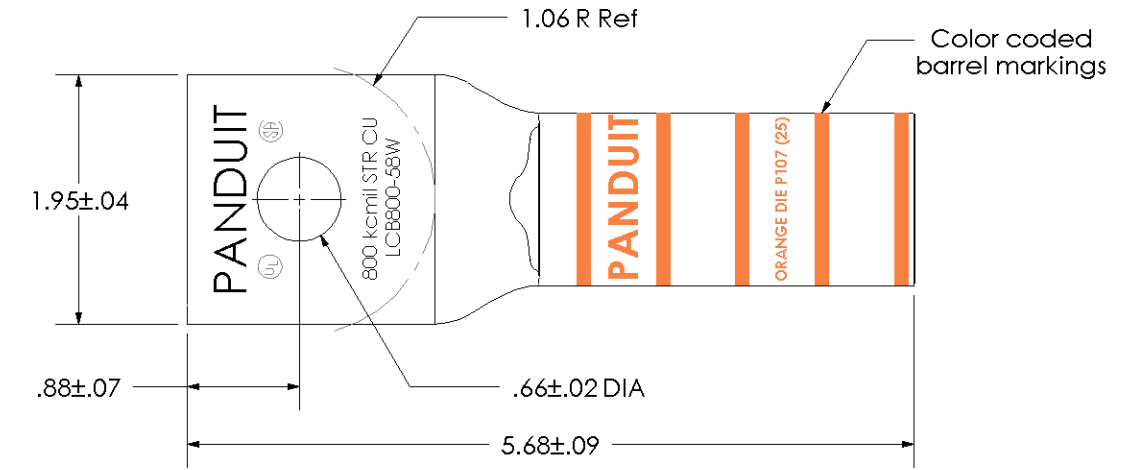

| | | | |
|-----|-------|-----|-----|
| 00 | 12/02 | SAB | DRL |
| REV | DATE | BY | CHK |

| | |
|-------------|-------|
| RELEASED | 10330 |
| DESCRIPTION | ECN |

| | |
|--|--|
| PANDUIT CORP. TINLEY PARK, ILLINOIS | |
| LCB800-58W-6 | |
| Copper Lug - One-Hole, Long Barrel with Window | |
| SCALE N/A | DRAWING NO / CAD FILE LCB800-58W-CUST |