


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 1/0 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 3/4 in. |
| Stud Size | 1/2 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | PINK |
| Panduit Die Index No. on Barrel | P42 |
| Alternate Industry Die Index No. () on Barrel | (12) |



CERTIFIED

LISTED Wire Connector

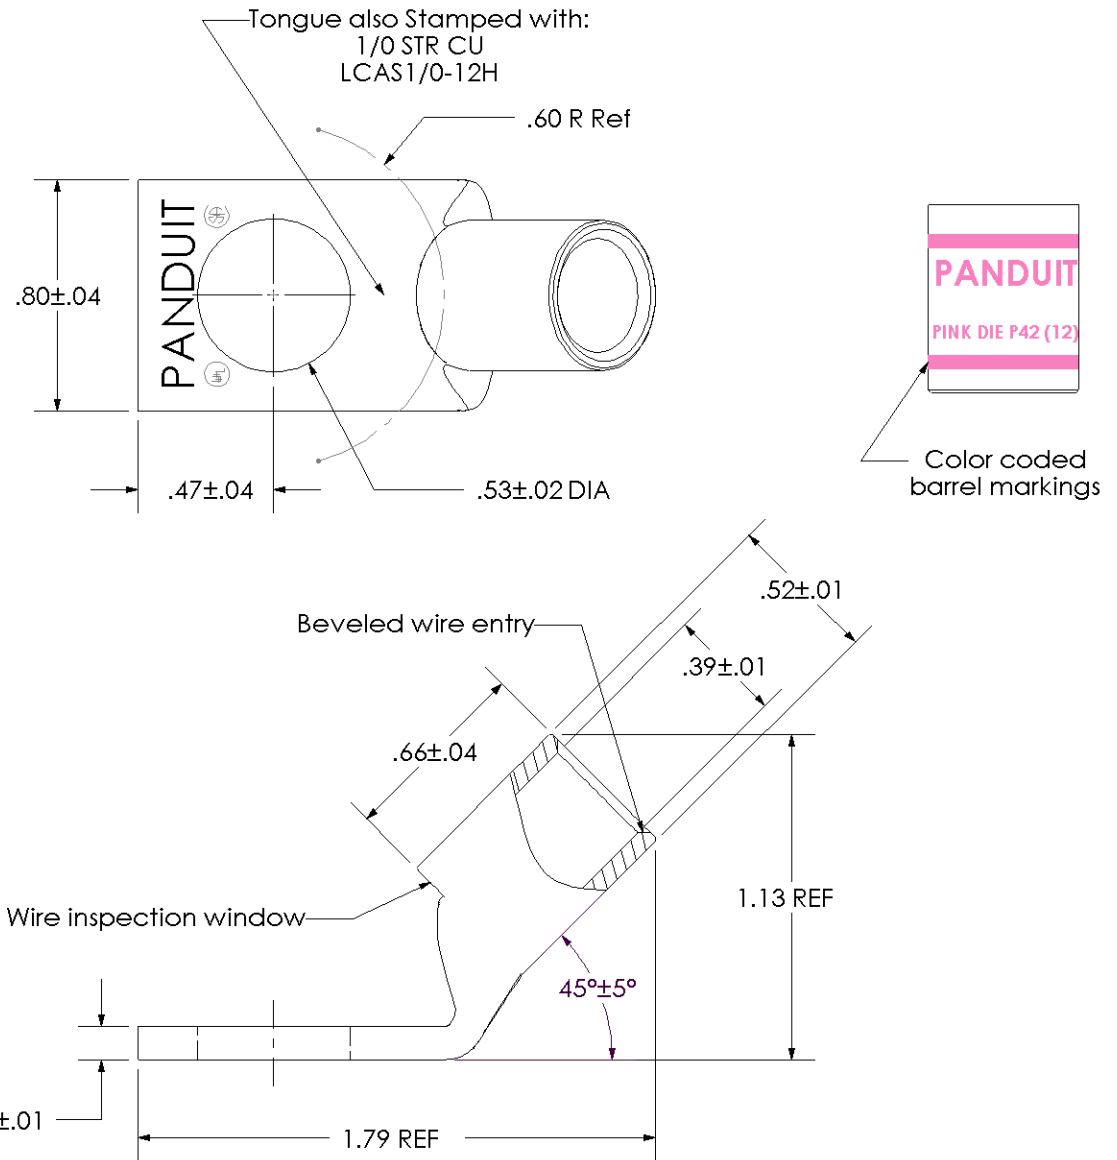

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCAS1/0-12H-X
Copper Lug - One-Hole, Short Barrel, 45° Angle Tongue

| | | | |
|-----|------|-----|-----|
| 00 | 8/02 | SAB | DRL |
| REV | DATE | BY | CHK |

RELEASED
DESCRIPTION

10325
ECN

SCALE
N/A

DRAWING NO / CAD FILE

LCAS1_0-12H-CUST