


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	LEGEND (SEE NOTE 6)		COLORS		WIDTH	LENGTH +15% -5%	STD. PKG.	LEGEND HEIGHT "A"
	OPTION 1	OPTION 2	LEGENDS	BACKGROUND				
HTDU20-FO HTDU30-FO HTDU60-FO	CAUTION CAUTION CAUTION FIBER OPTIC CABLE BURIED BELOW	CAUTION FIBER OPTIC CABLE BURIED BELOW	BLACK	ORANGE	2" +/- .145 3" +/- .17 6" +/- .27	1000 FT. 1 ROLL	1 ROLL	1" +/- .375 2" +/- .375 4.25" +/- .75
HTDU2R-E HTDU3R-E HTDU6R-E	CAUTION CAUTION CAUTION ELECTRIC LINE BURIED BELOW	CAUTION ELECTRIC LINE BURIED BELOW		RED	2" +/- .145 3" +/- .17 6" +/- .27			1" +/- .375 2" +/- .375 4.25" +/- .75
HTDU20-T HTDU30-T HTDU60-T	CAUTION CAUTION CAUTION TELEPHONE LINE BURIED BELOW	CAUTION TELEPHONE LINE BURIED BELOW		ORANGE	2" +/- .145 3" +/- .17 6" +/- .27			1" +/- .375 2" +/- .375 4.25" +/- .75
HTDU2B-W	CAUTION CAUTION CAUTION WATER LINE BURIED BELOW	CUATION WATER LINE BURIED BELOW		BLUE	2" +/- .145			1" +/- .375
HTDU3G-S	CAUTION CAUTION CAUTION SEWER LINE BURIED BELOW	CUATION SEWER LINE BURIED BELOW		GREEN	3" +/- .17			2" +/- .375
HTDU3B-W	CAUTION CAUTION CAUTION WATER LINE BURIED BELOW	CUATION WATER LINE BURIED BELOW		BLUE				

3
3

3

3

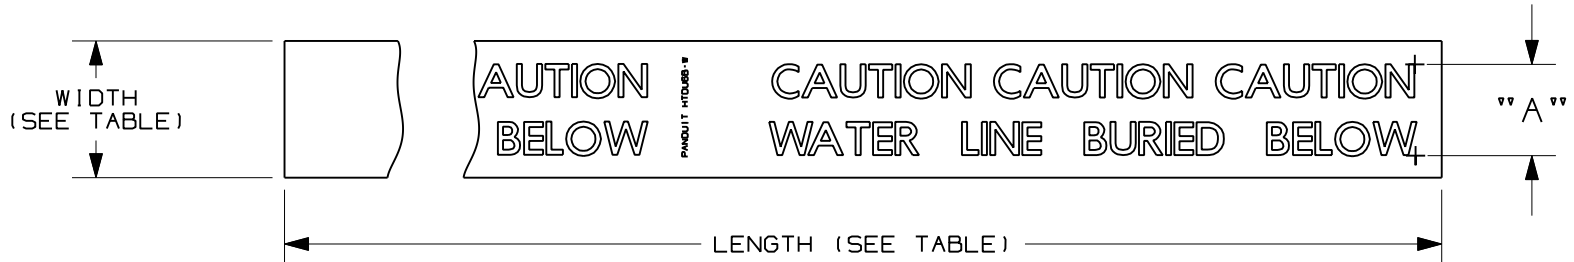

- NOTES:
1. MATERIAL: .35 MIL SOLID ALUMINUM CORE ENCASED IN A PROTECTIVE PLASTIC JACKET. TOTAL THICKNESS 4.5 mils to 6.0 mils.
 2. MATERIAL IS NOT BIODEGRADABLE.
 3. LETTER STYLE TO BE HELVETICA BOLD.
 4. LEGENDS OPTION 1 OR OPTION 11 ARE ACCEPTABLE.

CAD FILENAME/LAYERS		100318HJ-DC-C10627/10F	
PANDUIT CORP. TINLEY PARK, ILLINOIS			
CUSTOMER DRAWING HTDU UNDERGROUND DETECTABLE TAPE			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .25 (.XXX) ± .045 (.XX) ± .145 ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY RVU	MAT'L:	SCALE NTS	
DATE 10/29/07	SEE NOTE 1.	DRAWING NO. C10627	DWG A SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
4	8/4/11	RVU		ADD NEW PN: HTDU3G-S AND HTDU3B-W. UPDATE THE LEGEND HEIGHT SIZES. & TOL.	6449		R	
3	6/14/11	RVU		VOID.	6431		R	
2	2/22/11	RVU		ALL LEGENDS ON OPTION 1 AND 2 AREN'T MATCH. ALL INCORRECT.	6311		R	
1	12/16/09	RVU		4.5 mils to 6.0 mils was 5.5 mils. UPDATE TOLERANCES.	5931		R	
0	10/29/07	RVU		DRAWING RELEASE	5193		R	

Handwritten signature