


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

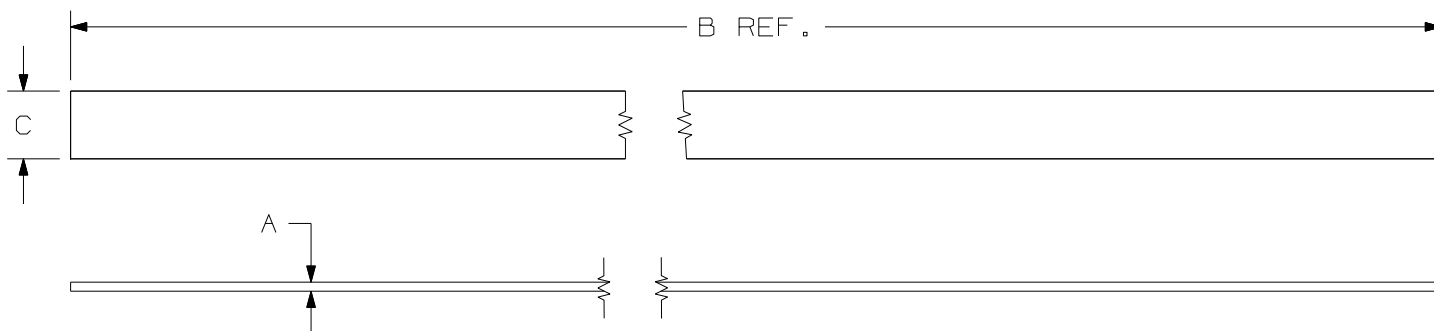

| PANDUIT PART NO. | BUNDLE DIA. | | A in (mm) | B in (mm) | C in (mm) | MIN. LOOP* TENSILE lbs. (N) | ROLL DESCRIPTION | APPROXIMATE WEIGHT lbs/10 ROLLS (g) |
|------------------|--------------|---------------|---------------|----------------|----------------|-----------------------------------|---|--|
| | MIN. in (mm) | MAX. in (mm) | | | | | | |
| HLS1.5S | .25 (6.4) | 1.5 (38.1) | .100 (2.5) | 6.0 (152) | .750 (19.1) | 50 (222) | PERFORATED STRIPS QTY: 10 PIECES/ROLL | .43 (194) |
| HLS3S | .25 (6.4) | 3.2 (81.3) | .100 (2.5) | 12.0 (305) | .750 (19.1) | 50 (222) | | .85 (384) |
| HLS5S | .25 (6.4) | 5.0 (127) | .100 (2.5) | 18.0 (457) | .750 (19.1) | 50 (222) | | 1.25 (568) |
| HLS-15R | .25 (6.4) | VARIOUS | .100 (2.5) | 180 (4572) | .750 (19.1) | 50 (222) | 15 FT CONTINUOUS | 1.25 (567) |
| HLS-75R | .25 (6.4) | VARIOUS | .100 (2.5) | 900 (22860) | .750 (19.1) | 50 (222) | 75 FT | 6.32 (2867) |

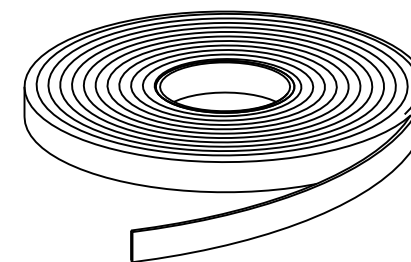


ILLUSTRATION 'A'

NOTES:

- 1) ALL LENGTHS PACKED IN ROLL FORM (SEE ILLUSTRATION 'A')
- * 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
- 3) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR OPTIONAL COLORS.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

SS-27184.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES
HLS SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .035
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
KET

MAT'L:

SCALE NONE

DATE
12/30/98

POLYETHYLENE HOOK/
NYLON LOOP

DRAWING NO.

SS-27184

DWG
A
SIZE

| 4 | 6/5/06 | FAB | | ADDED PART WEIGHTS TO DRAWING | 27184 | 4 | | | | | |
|-----|--------|-----|-----|-------------------------------|-------|---|------|-----|--|--|--|
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | | | |

CHK'D
HVP