


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- NOTES:
1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
  2. GIGA-PUNCH CONNECTOR ON ONE END AND AN RJ45 MODULAR PLUG WIRED TO EIA/TIA 568A ON THE OTHER END. PATCH CORDS CAN BE USED WITH GIGA-PUNCH FOUR-PAIR CONNECTING BLOCKS.
  3. THE GIGA-PUNCH PATCH CORD IS POLARIZED TO PREVENT REVERSE INSTALLATION ON THE CONNECTOR BLOCK. INCORPORATES A CABLE JACKET RETENTION FEATURE WHICH MINIMIZES WIRE UNTWISTING, AND HAS AN INTEGRAL STRAIN RELIEF.
  4. PATCH CORDS CONSTRUCTED USING UL OR ETL VERIFIED CABLE.
  5. MATERIAL: CONNECTOR: POLYCARBONATE  
CABLE: CAT6, 24 AWG STRANDED-TIN/COPPER  
JACKET: PVC  
JACKET COLOR: WHITE
  6. THIS CABLE SHOULD ONLY BE USED IN INTERCONNECT APPLICATION.

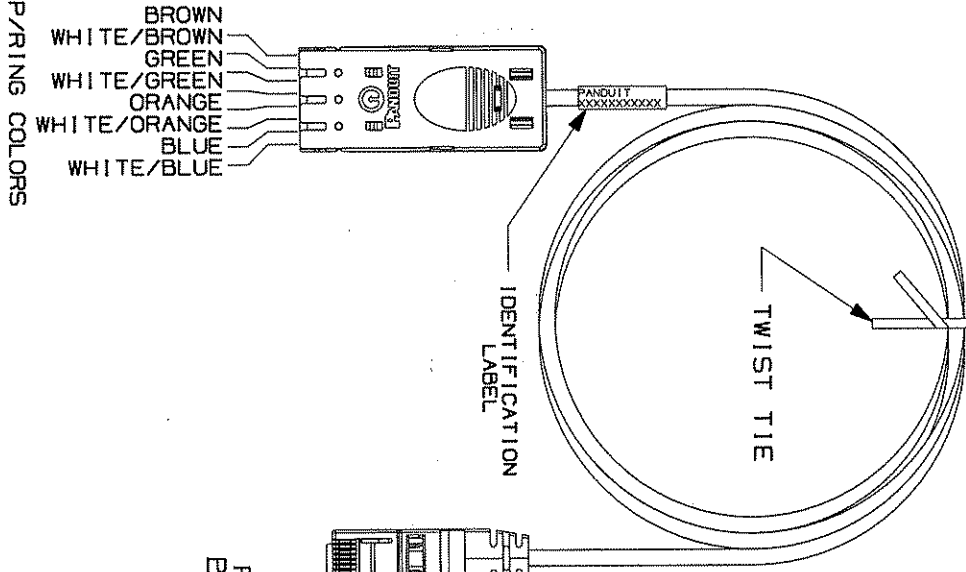

PANDUIT PART NUMBER	MIN. CABLE LENGTH	WEIGHT
GPPC41G3AY	3 FT.	.91 LB/10 PCS 1.11 9/10 PCS
GPPC41G5AY	5 FT.	1.34 LB/10 PCS 1.607 9/10 PCS
GPPC41G7AY	7 FT.	1.85 LB/10 PCS 1.939 9/10 PCS
GPPC41G9AY	9 FT.	2.30 LB/10 PCS 1.041 9/10 PCS
GPPC41G14AY	14 FT.	3.42 LB/10 PCS 1.590 9/10 PCS
GPPC41G20AY	20 FT.	4.79 LB/10 PCS 1.2172 9/10 PCS
GPPC41G1MAY	1 METER	.97 LB/10 PCS 1.39 9/10 PCS
GPPC41G2MAY	2 METERS	1.71 LB/10 PCS 1.79 9/10 PCS
GPPC41G3MAY	3 METERS	2.45 LB/10 PCS 1.1111 9/10 PCS
GPPC41G5MAY	5 METERS	3.83 LB/10 PCS 1.1793 9/10 PCS

MODEL FILENAME  
DRAWING FILENAME  
TITLE  
SIZE

M02479JU\_DC257\_00A.PRT  
GIGA-PUNCH TO RJ45  
EIA/TIA 568A PATCHCORD  
CUSTOMER DRAWING  
A

**PANDUIT CORP.**  
TINLEY PARK, ILL. 60477

ALL DIMENSIONS ARE GIVEN IN INCHES.  
DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS.  
DIMENSIONAL TOLERANCES ARE:  
1. .XX1 ±.010(1.3)  
1. .XX1 ±.031(.81) ANGLES ±

REVIEW DRAWING NUMBER/SHEET  
PART NO.  
GPPC41G\*\*AY

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-20-06	NER	ME	RELEASED FOR PRODUCTION	02479-257				

DATE  
3-20-06

DRAWN BY  
NER

THIRD ANGLE PROJECTION

SEE NOTES

DRAWING NO.  
02479-257