


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
2. PATCH CORDS CAN BE USED WITH GIGA-PUNCH FOUR-PAIR CONNECTING BLOCKS.
3. THE GIGA-PUNCH PATCH CORD IS POLARIZED TO PREVENT REVERSE INSTALLATION TO THE CONNECTOR BLOCK, INCORPORATES A CABLE JACKET RETENTION FEATURE WHICH MINIMIZES WIRE UNTWISTING, AND HAS AN INTEGRAL STRAIN RELIEF.
4. PATCH CORDS CONSTRUCTED USING UL OR ETL VERIFIED CABLE.
5. MATERIAL: CONNECTOR: POLYCARBONATE
CABLE: CAT6, 24 AWG STRANDED-TIN/COPPER
JACKET: PVC
JACKET COLOR: WHITE

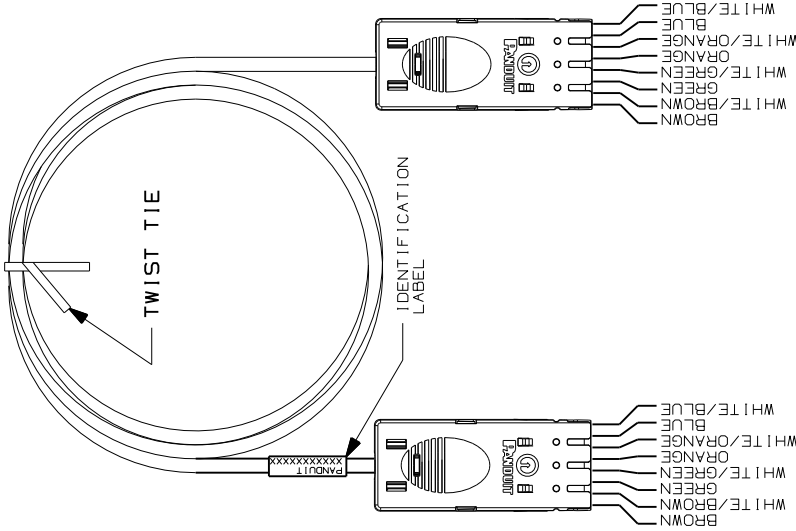

| PANDUIT P/N | LENGTH (MIN) FEET (mm) | WEIGHT LB/10 PCS (530 g/10 PCS) |
|-------------|------------------------|---------------------------------|
| GPPC41G3Y | 3 FT. (914mm) | 1.17 |
| GPPC41G5Y | 5 FT. (1524mm) | 1.70 |
| GPPC41G7Y | 7 FT. (2134mm) | 2.17 |
| GPPC41G9Y | 9 FT. (2743mm) | 2.70 |
| GPPC41G14Y | 14 FT. (4267mm) | 4.03 |
| GPPC41G20Y | 20 FT. (6096mm) | 5.82 |
| GPPC41G1MY | 1 METER | 1.97 |
| GPPC41G2MY | 2 METERS | 3.77 |
| GPPC41G3MY | 3 METERS | 5.41 |
| GPPC41G5MY | 5 METERS | 8.93 |

CAD FILENAME/LAYERS M02479NIT_DC358_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS
GIGA-PUNCH(TM) PATCH CORDS (GPPC41G**Y) CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.XX) ± .031(.8) ANGLES ±
(.XXX) ± .010(.3)
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

| | | |
|---------------|--------------------------------------|-------------------|
| DRAWN BY: NER | MAT'L: | SCALE: NONE |
| DATE: 3-21-06 | SEE NOTES | DWG NO. 02479-358 |
| CHK'D: | | SIZE: A |
| REV: R | DATE: 3-21-06 | NER |
| BY: CHK | DESCRIPTION: RELEASED FOR PRODUCTION | |
| | ECN: R | CUST: SUP |
| | | OTH: |