
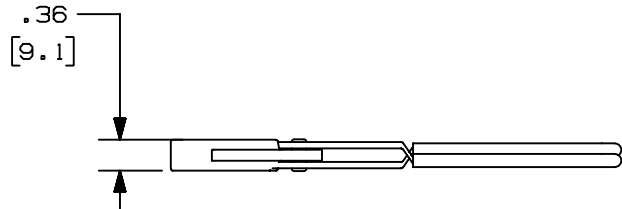



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

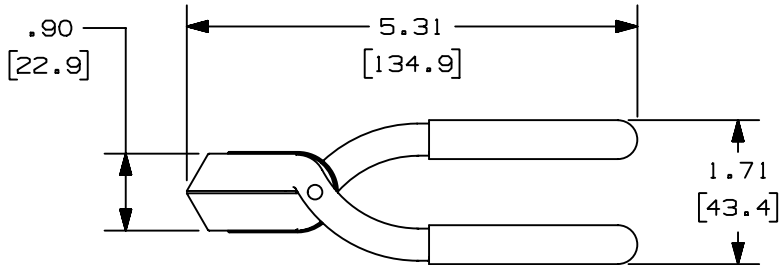

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:


1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
2. BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

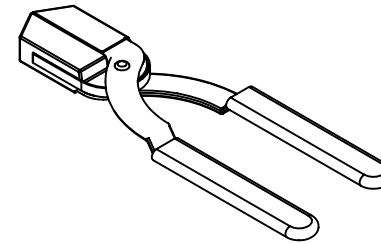

G.O.F. KIT BUFFER STRIPPERS
203 MICRON
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



THIRD ANGLE
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)
(.XX) ±.125(0.3) ANGLES

DRAWING FILENAME
D35560EP_DC_00A.prt

SCALE
NONE

PART NO.
FBFSP

DRAWN BY
JBA

REVIEW DRAWING NUMBERS

DRAWING NO.
35560-93

SIZE
A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
1	04-19-05	MYW		RELEASED TO PRODUCTION	35560-93				

DATE
07-07-97

CHK'D
CEF