




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	WEIGHT (APPROX.)
DP125E88TGY	1.25 lb (567 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
 - MATERIAL: STEEL/BLACK POWDER COAT PANEL HOUSING; THERMOPLASTIC RESIN RJ45 MODULE; THERMOPLASTIC RESIN UL94V-0 PUNCHDOWN BLOCKS; THERMOPLASTIC RESIN UL94V-0 BEZEL ASSEMBLY; THERMOPLASTIC RESIN RETENTION CAP; THERMOPLASTIC RESIN UL94V-0 12 PORT PATCH PANEL WITH TWO 6 POSITION BEZELS ASSEMBLIES, 8 WIRES PER JACK ASSEMBLY.
 - THE PATCH PANEL IS DESIGNED TO SNAP INTO A STANDARD 589D WALL MOUNT BRACKET. DIMENSIONS IN PARENTHESES ARE IN METRIC.
 - USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
 - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

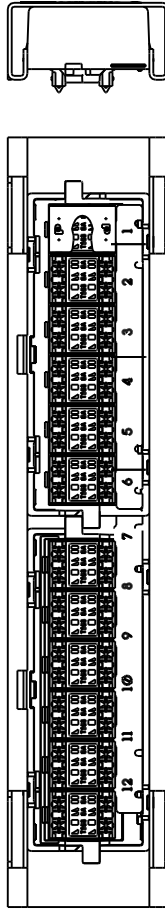

RETENTION CAP SNAPS ONTO CONNECTOR ONE CAP PER CONNECTOR

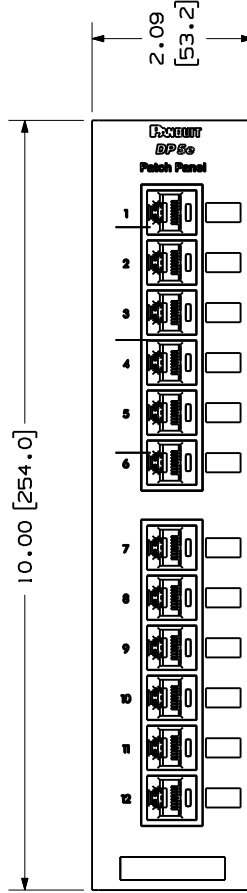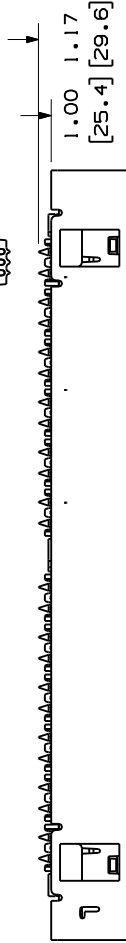

MODEL FILENAME	MO208BAG_12_PORT_03	SIZE	A
DRAWING FILENAME	MO2479ML_DC325_00A.PRT		
TITLE	DP5e 12 PORT PATCH PANEL CUSTOMER DRAWING		

	PANDUIT TINLEY PARK, IL 60477	I.P. NUMBER	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (1.X) ± .03 (1.XXX) ± .005 (1.XX) ± .01 ANGLES ± .1° REVIEW DRAWING NUMBERS	PRODUCT SPEC	
	WORK INSTRUCTION SCALE .25:1		
DRAWN BY: NER DATE: 3-22-06 CHK'D:		PART NO.	DP125E88TGY
		DRAWING NO.	02479-325

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-22-06	NER		RELEASED TO PRODUCTION	02479-325				