


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

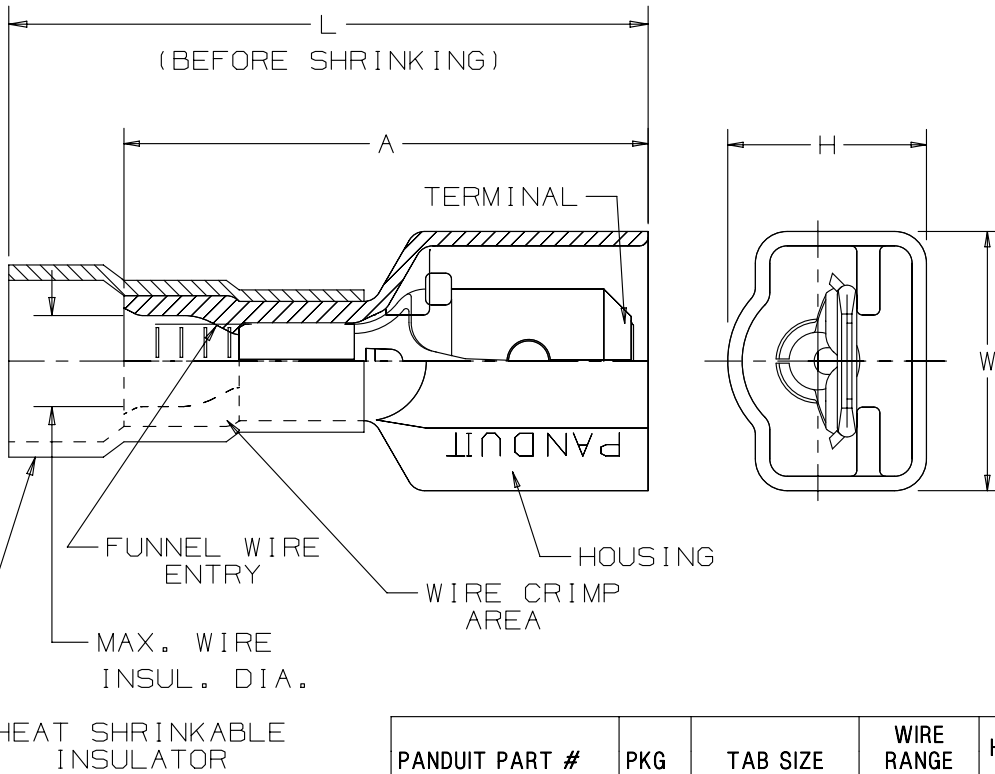

NOTES:

1. FOR USE WITH STRANDED COPPER WIRE ONLY (SEE TABLE FOR WIRE RANGE)
2. MATERIAL:
 - A. TERMINAL - CDA 260 BRASS, NICKEL PLATED
 - B. HOUSING - TYPE 66 NYLON
 - C. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310
6. PACKAGING QTY:
 - A. STD PKG -Q = 25
 - B. BULK PKG. -D = 500

PANDUIT PART #	PKG	TAB SIZE	WIRE RANGE AWG	HOUSING COLOR	MAX. INSUL. DIA.	DIMENSIONS			
						A	W	H	L
DNH18-250FIM	-Q	.250 X .032 [6,35 X 0,81]	#22-18	RED	.133 [3,38]	.90 [22,9]	.41 [10,4]	.31 [7,9]	1.50 [38,1]
DNH14-250FIM	-Q -D	.250 X .032 [6,35 X 0,81]	#16-14	BLUE	.158 [4,01]	.90 [22,9]	.41 [10,4]	.31 [7,9]	1.50 [38,1]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04	04-25-13	JBN	RTFI	RTFI	UPDATED DRAWING BORDER & TITLE BLOCK	A41457

TITLE		HEAT SHRINK FULLY INSULATED MALE DISCONNECTS	
		CUSTOMER DRAWING	
ITEM REVISION NAME		N41457BA/04	
DATASET FILE NAME		N41457BA_DC/04A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		PANDUIT	
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			
DRAWING NUMBER:		SEE NOTES	
DRAWN BY		A41457	
DATE			
CHK		DRAWING NUMBER:	
SCALE		A41457	
DRL		THIRD ANGLE PROJECTION	
-		SHT 1 OF 1	
LCA		A	
NONE			

D10100DA/15