
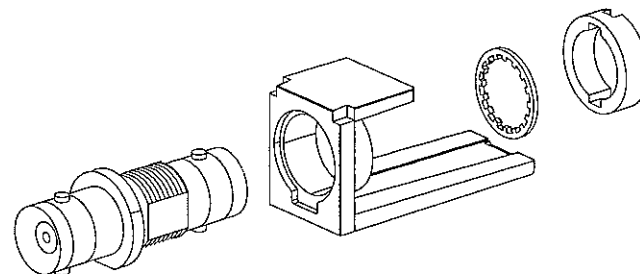


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMBA75**Y	3.58 LB/100 PCS (1629g/100 PCS)

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- FOR FREQUENCY RANGE FROM 10-250MHZ, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
- ATTENUATION AND RETURN LOSS AT 22.68 Mhz, THE SIGNAL FREQUENCY FOR DS3, GIVES RESULTS OF -.1 DB AND -30 DB RESPECTIVELY.
- PART INCLUDES:
 - i- MODULE BASE
 - i- 75ohm BNC COUPLER (ASSEMBLED TO MODULE BASE)
 - i- LOCK WASHER
 - i- ROUND SPANNER NUT

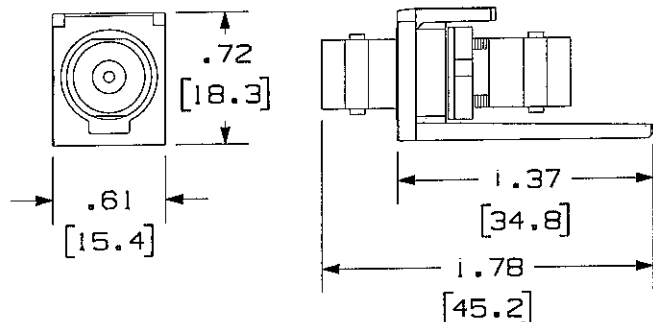

DRAWING FILENAME		MO2479GW_DC181_00A.PRT	SIZE	A
MINI-COM 75 OHM BNC COUPLER MODULE CUSTOMER DRAWING				
PANDUIT ™ CORP. TINLEY PARK, ILL 60477		I.I. NUMBER N/A		
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .010(.3) (.XX) ± .031(.8) ANGLES ±		PRODUCT SPEC N/A		
THIRD ANGLE PROJECTION		WORK INSTRUCTION N/A		
DRAWN BY JsP		SCALE NONE		
DATE 4-26-06		PART NO. CMBA75**Y		
MATERIAL: COUPLER BODY- NICKEL PLATED COUPLER INSULATOR- PLASTIC COUPLER CONTACT- GOLD PLATED MODULE BASE- PLASTIC		DRAWING NO. 02479-181		

NETWORK SYSTEMS
AUG 18 2006
ENGINEERING DEPT

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	4-26-06	JsP	<i>JsP</i>	RELEASED TO PRODUCTION	02479-181		<i>JsP</i>	<i>JsP</i>	