

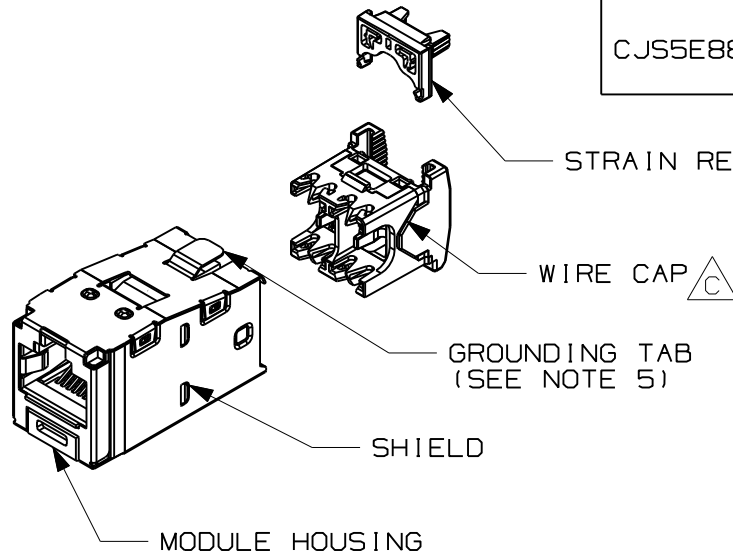


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART #	DESCRIPTION	WEIGHT*
CJS5E88TGY	8 POSITION, 8 WIRE SHIELDED MODULE WITH INTEGRAL SHIELD. TERMINATION CAP IS COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	3.314 LB/100 PCS (1503g/100 PCS)



- NOTES:
- RED WIRE CAP DESIGNATES CATEGORY 5E PERFORMANCE.
  - MATERIAL:  
MODULE HOUSING-ABS  
SHIELD-TIN PLATED OVER PHOS. BRONZE  
WIRE CAP/CLIP - ZINC AND PC
  - ALL TX5e, 6 AND 6A 8 POSITION, 8 WIRE JACK MODULES ARE UNIVERSAL IN DESIGN. THEY ACCEPT SIX AND EIGHT POSITION MODULAR PLUGS WITHOUT DAMAGE.
  - DIMENSIONS IN PARENTHESES ARE IN METRIC.
  - .187 x .010" GROUNDING TAB PROVIDED AS OPTIONAL CONDUCTIVE PATH FOR GROUNDING.
- \*WEIGHT IS APPROXIMATE

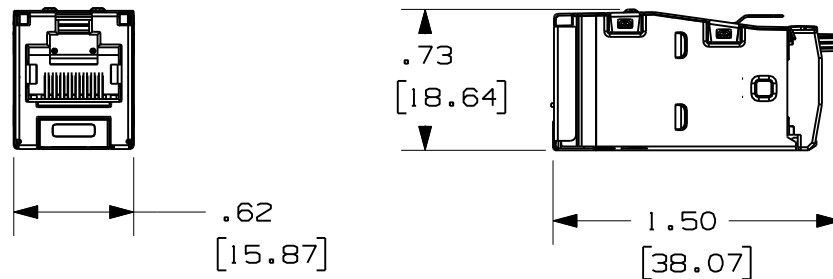

MODEL FILENAME	MO1874AI_10GTX_SHLD_ASSY_03	SIZE	A
DRAWING FILENAME	M02479NR_DC356_03B.prt		
TITLE	TX5e SHIELDED JACK MODULE CUSTOMER DRAWING		
	PANDUIT <sup>TM</sup> CORP. TINLEY PARK, ILL 60477	I.I. NUMBER	
	THIRD ANGLE PROJECTION	PRODUCT SPEC	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.	WORK INSTRUCTION	
	DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ±.010(.3) (.XX) ±.03(.8) ANGLES ±	SCALE	FULL
DRAWN BY	AFW	REVIEW DRAWING NUMBERS	PART NO. CJS5E88TGY
DATE	3-11-06		DRAWING NO. 02479-356
CHK'D	CEF		

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
2	4-09-07	MDJr		D. REVISED NOTE 3 TO ADD "6 AND 6A". C. REVISED CALL-OUT FOR WIRE CAP.	02479-356				
1	10-25-06	MDJr	NGM	B. REVISED NOTE 2 TO ADD SHIELD MAT. A. UPDATED MODEL TO REV 03.	02479-356	TRW	TRW		
R	3-11-06	AFW	CEF	ADDED Rohs COMPLIANT P/N	02479-356	CEF	CEF		