






THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

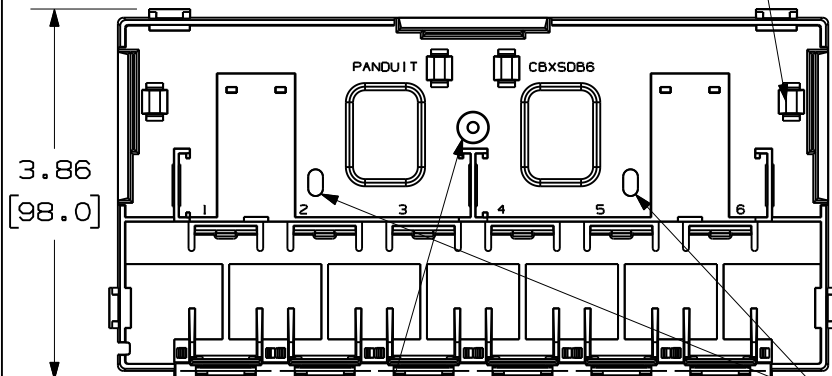


COVER REMOVED FOR CLARITY

PAN-TY LOOP FOR CABLE HOLD-DOWN (4 PLACES)




BREAKOUT AREA (3 PLACES)

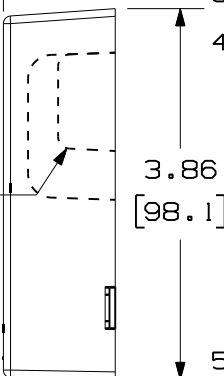

KNOCK OUT MOUNTING HOLES FOR #6 PAN HEAD SCREW

POST FOR TAMPER RESISTANT SCREW

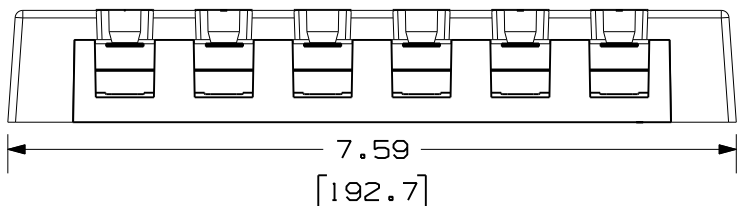

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. ALSO INCLUDED WITH BOX:
 - 1- BOX BASE
 - 1- BOX COVER
 - 2- PLT1.51-M PAN-TY
 - 1- LABEL/ LABEL COVER
 - 2- MOUNTING SCREW
 - 1- COVER SCREW (USED TO SECURE COVER TO BASE)
 - 2- STRIP OF 1.00" X .75" FOAM TAPE FOR MOUNTING
 - 1- STRIP OF 3.00" X .75" FOAM TAPE FOR MOUNTING
 - 2- BEND RADIUS CONTROL BRIDGE
5. BASE HAS TWO POCKETS FOR OPTIONAL MAGNET (CSBM-X)
6. BREAKOUTS DESIGNED TO ACCEPT LD5/LDP5 OR LD10/LDP10 RACEWAY.
7. BASE MATERIAL THICKNESS: .090(2.29).

PANDUIT P/N	WEIGHT
CBXSD6**-AY	3.44 LB/10 PCS (1564.1 g/10 PCS)

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

MODEL FILENAME	MO1439AB_CBXSD6_US_02.PRT	SIZE	A
DRAWING FILENAME	MO2479EW_DC129_00A.PRT		

MINI-COM 6 POSITION SHUTTERED DEEP BOX CUSTOMER DRAWING

<p>PANDUITTM CORP. TINLEY PARK, ILL 60477</p>	I.I. NUMBER	N/A
	PRODUCT SPEC	N/A
<p>THIRD ANGLE PROJECTION</p>	WORK INSTRUCTION	N/A
	SCALE	NONE
DRAWN BY JsP	MATERIAL:	PART NO. CBXSD6**-AY
DATE 12-27-06	BOX: ABS DOORS: PC	DRAWING NO. 02479-129
CHK'D		

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	12-27-06	JsP		RELEASED TO PRODUCTION	02479-129				