


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

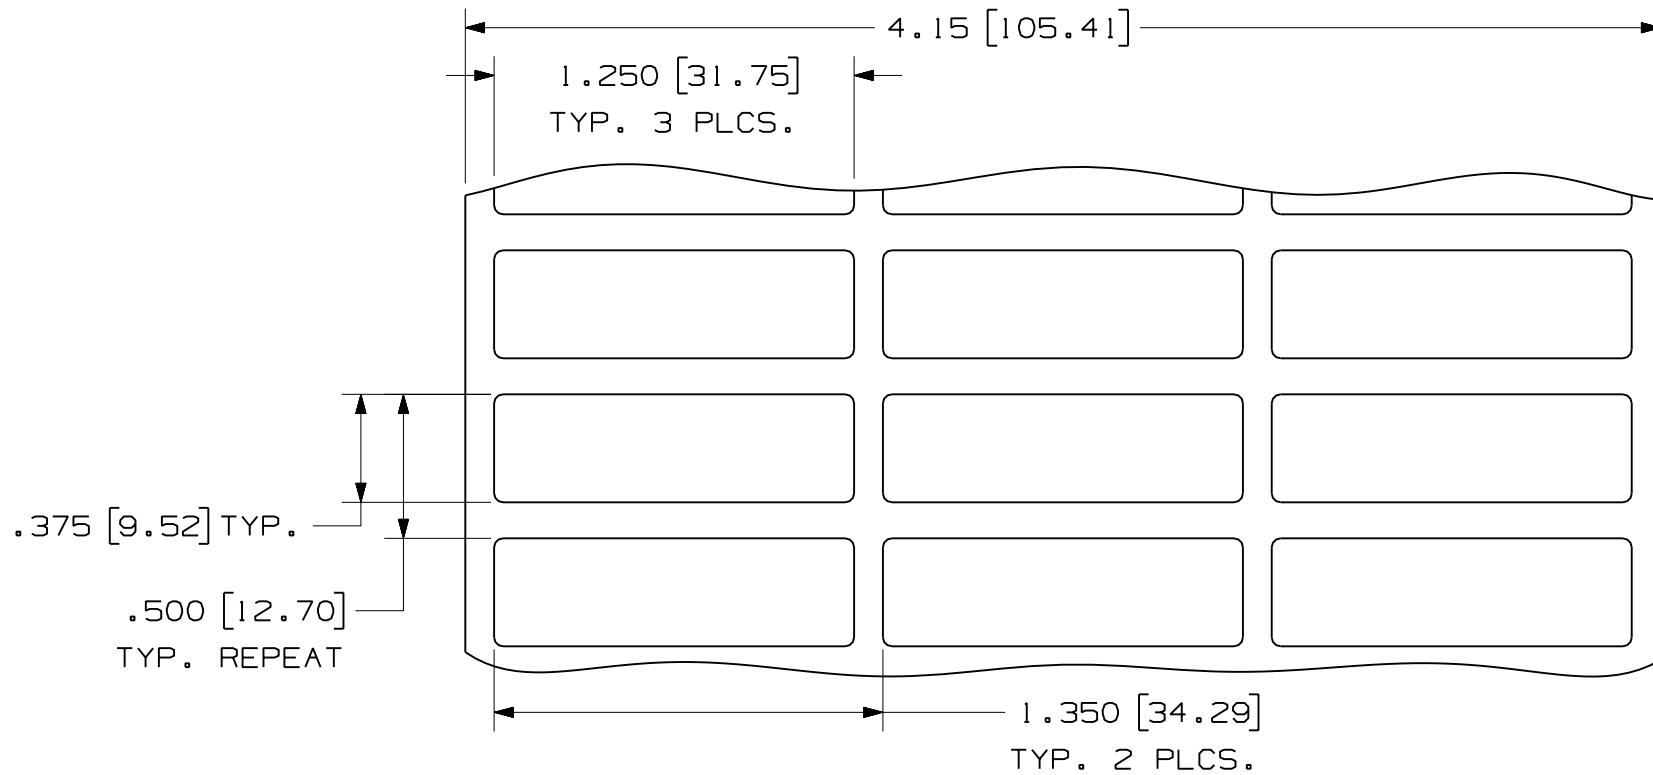

NOTES:
 1. DIMENSIONS IN () ARE MILLIMETERS.
 2. SEE MFG. DRAWING NO. A61416.

PART NAME	MARKER SIZE inches (mm)	LABELS PER ROW	STANDARD PKG. QTY.
C125X038YJT	1.250 [31.75] X X 0.375 [9.53]	3	10000

CAD FILENAME/LAYERS
 100472PO_C10529_C125X038YJT_00.PRT

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
0	10-24-06	RVU		DRAWING RELEASE.	4750	R		

PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING
 OPTIMUM C125X038YJT
 THERMAL TRANSFER LABELS

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONAL TOLERANCES ARE:
 (.X) ± .031 (.XXX) ± .010
 (.XX) ± .015 ANGLES ±

UNLESS OTHERWISE SPECIFIED,
 ALL DIMENSIONS ARE GIVEN
 IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
 RVU

DATE
 10-24-06

CHK'D

MAT'L:
 GMY

SCALE
 NTS

DRAWING NO.
 C10529

DWG
 A
 SIZE