


NOTES:

1. BRAIDED STRAP IS #4 AWG STRANDED COPPER, TIN PLATED FERRULES ARE TIN PLATED COPPER.
2. DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
3. PARTS ARE UL LISTED AND CSA CERTIFIED FOR BONDING APPLICATIONS ONLY.

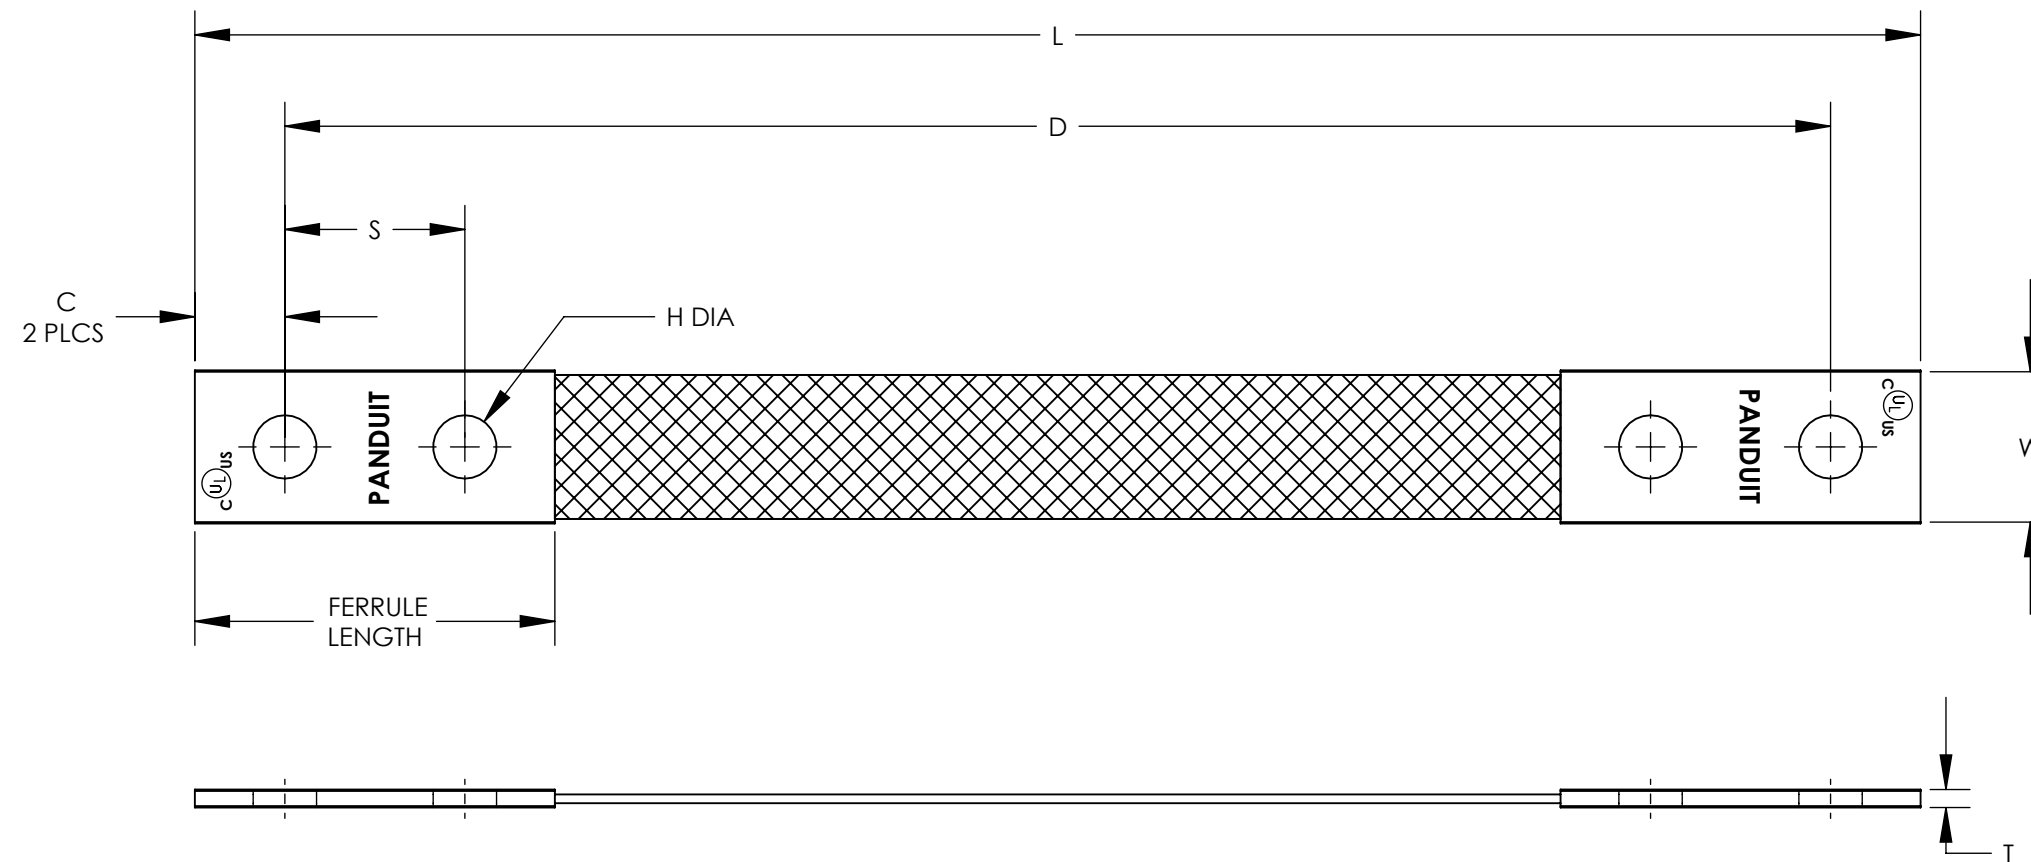

PANDUIT PART NUMBER	BRAIDED STRAP SIZE	INSULATION	NO. OF BRAIDS IN FERRULE	DIMENSIONS - IN [mm]							
				L	D	S	W	C	T	H DIA	FERRULE LENGTH
BS201246EU	4 AWG	NO	1	12.00 [304.8]	10.75 [273.1]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]
BS201846EU	4 AWG	NO	1	18.00 [457.2]	16.75 [425.5]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]
BS202446EU	4 AWG	NO	1	24.00 [609.6]	22.75 [577.9]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]

								PANDUIT CORP. TINLEY PARK, ILLINOIS		
								TWO-HOLE BRAIDED BONDING STRAPS		
								CUSTOMER DRAWING		
05	6/11	JHNU	JHNU	REVISED TONGUE MARKINGS: cULus WAS UL				N11002BF-C41745	RGB	RGB
04	2/09	JHNU	JHNU	REMOVED CSA SYMBOL FROM DRAWING						
03	1/09	JHNU	JHNU	REMOVED AMPERE RATING FROM TABLE						
02	1/09	JHNU	JHNU	REVISED NOTES ADDED FERRULE INFORMATION TO TABLE						
01	10/08	JHNU	DWDA	REVISED NOTE 1: #4 AWG WAS #6, REMOVED NOTE 2						
00	2/08	JHNU	DWDA	DRAWING RELEASED						
REV	DATE	BY	CHK	DESCRIPTION				ECN	-R	SUP

**UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCES ARE:**

(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

**UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN IN
INCHES, THIRD ANGLE PROJECTION**

SCALE **NONE**

DRAWING NO / CAD FILE **C41745_05**

DWG **B**
SIZE

DRAWN BY JHNU **MAT'L:**

DATE 2/08

CHK'D