



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	ALUM. WIRE SIZE	COPPER PIGTAIL SIZE	WIRE STRIP LENGTH	DIMENSIONS			CAP COLOR
				C	L	O.D.	
BPC6-L	6 AWG	8 AWG		.88	2.45	.64	TAN
BPC4-L	4 AWG	6 AWG	1.00	.88	2.45	.64	
BPC2-L	2 AWG	4 AWG	1.00	.88	2.45	.64	
BPC1-X	1 AWG	3 AWG	1.00	1.00	2.58	.64	
BPC1/0-X	1/0AWG	2 AWG	1.25	1.25	3.33	.91	RED
BPC2/0-X	2/0AWG	1 AWG	1.25	1.25	3.33	.91	
BPC3/0-X	3/0AWG	1/0 AWG	1.25	1.38	3.45	.91	
BPC4/0-X	4/0AWG	2/0 AWG	1.25	1.38	3.45	.91	GREEN
BPC250-X	250 MCM	3/0 AWG	1.38	1.50	3.70	1.16	
BPC300-X	300 MCM	4/0 AWG	1.38	1.63	4.11	1.16	
BPC350-X	350 MCM	4/0 AWG	1.38	1.63	4.11	1.16	BLACK
BPC400-X	400 MCM	250 MCM	1.38	1.88	4.34	1.32	
BPC500-X	500 MCM	350 MCM	1.38	1.88	4.34	1.32	RED
BPC600-6	600 MCM	350 MCM	1.88	1.88	4.78	1.50	
BPC750-6	750 MCM	500 MCM	1.88	2.00	4.91	1.50	

**NOTES:**

1. BARREL MATERIAL: ALUMINUM A-A OR ALUMINUM ALLOY 1100.
2. WIRE MATERIAL: HIGH CONDUCTIVITY GRADE, STRANDED COPPER.
3. USER TO ASSEMBLE CONNECTORS TO ALUMINUM STRANDED WIRE ONLY
4. OXIDE INHIBITING JOINT COMPOUND PREFILLED IN EACH BARREL.
5. CONNECTOR UL LISTED, RATED FOR 90° C AND 600V. OPERATION. INSULATING SLEEVES ARE TO BE RATED FOR 90° C - 600V. OPERATION
6. INSULATING SLEEVE INCLUDED (EPDM)
7. PACKAGE QTY: -L=50  
-X=10

COLOR CODED PLASTIC CAP

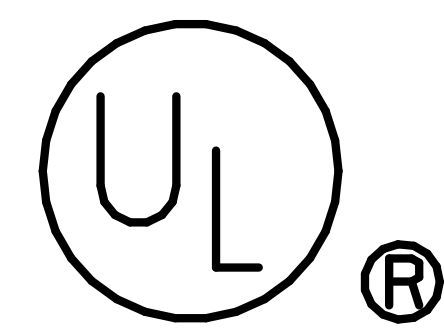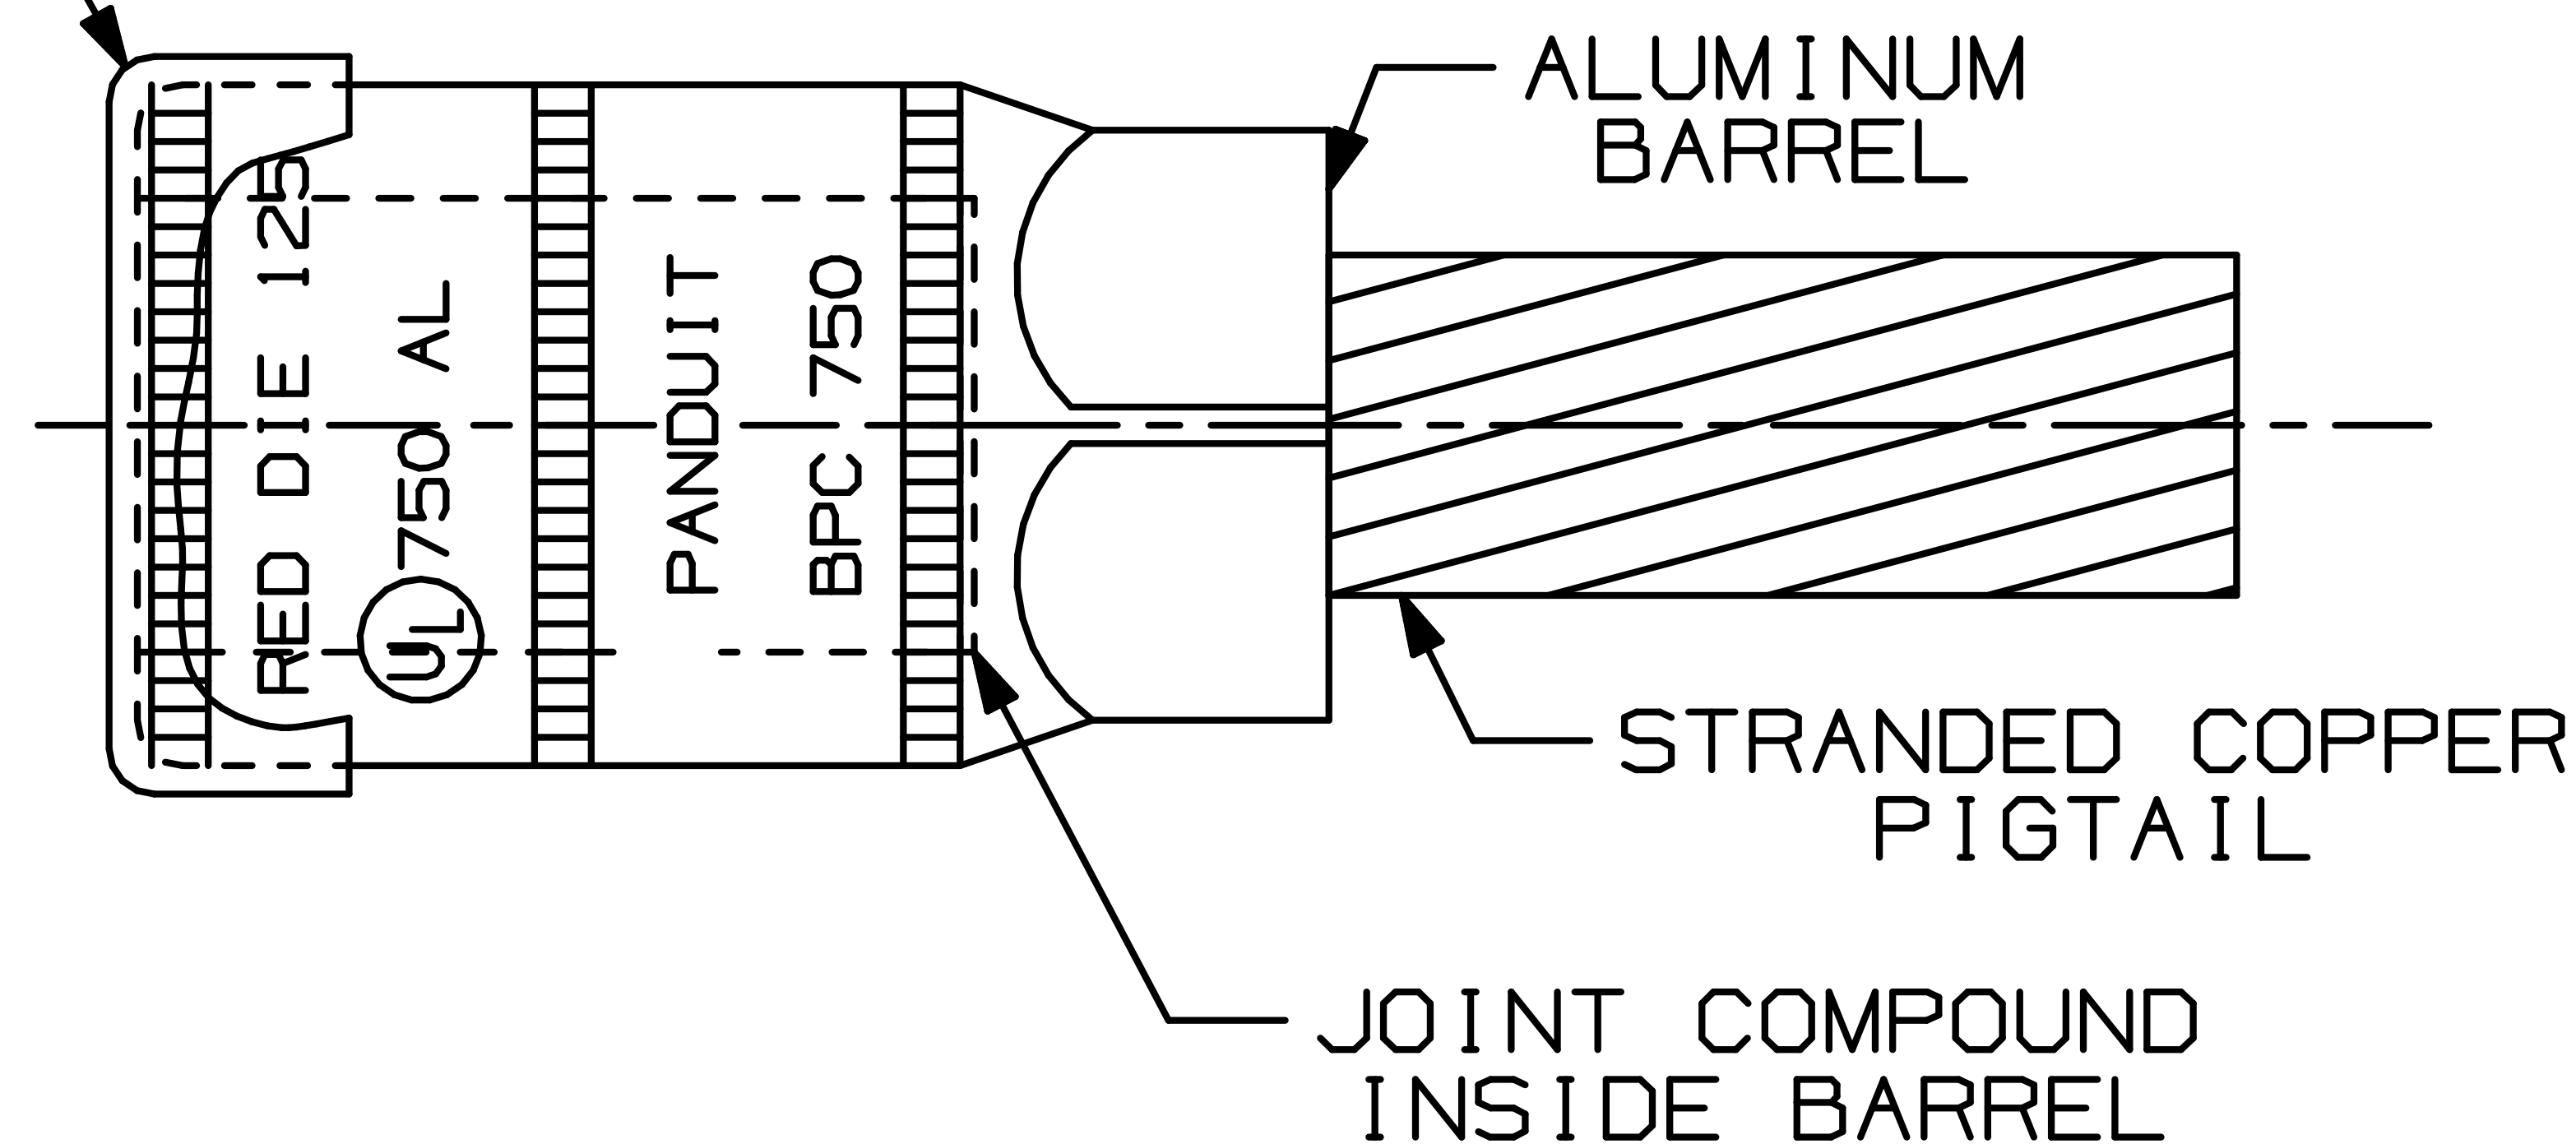

LISTED E52164

C41292\_01

				<b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS		
01	9/08	JHNU	JHNU	REVISED COPPER PIGTAIL SIZE FOR BPC1-X: 3 AWG WAS 2 AWG		
00	1/01	EJS		DRAWING RELEASED		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	SUP PM
				BI-METAL SPLICE		
		DRAWN BY	EJS	CHK'D	SCALE	NONE
				DRAWING NO.	C41292	