
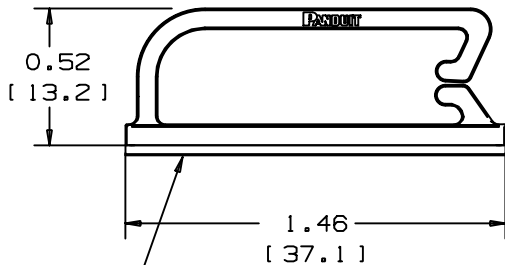


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

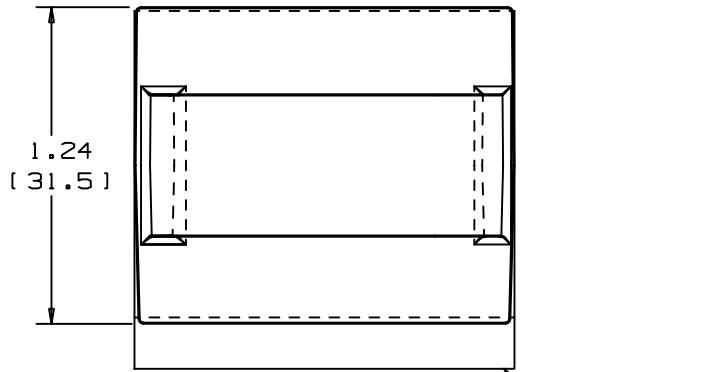


ADHESIVE TAPE: PRESSURE SENSITIVE FOAM 0.04 [1.0] THICK WITH RUBBER ADHESIVE AND PROTECTIVE LINER. MOUNT IS DESIGNED TO SUPPORT 0.91 lbs. [411g] MAXIMUM WEIGHT ON A CLEAN, DRY, SMOOTH, AND GREASE-FREE SURFACE.

| PANDUIT PART NO. * | WEIGHT LBS / 100 [G] / PCS. |
|--------------------|-----------------------------|
| BEC38-A | 0.95 [430] |
| BEC38-AT | 0.95 [430] |


NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2. TO APPLY MOUNT: a) REMOVE PROTECTIVE LINER; b) PLACE IN DESIRED LOCATION; c) APPLY PRESSURE TO TOP OF MOUNT.

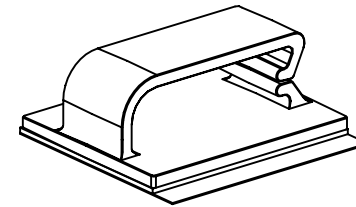

SCALE: FULL

| | |
|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| DIMENSIONS IN BRACKETS ARE METRIC [mm] | |
| CAD FILENAME/LAYERS G00239CG_PB_BEC38_00 | |
|  TINLEY PARK, ILLINOIS | |
| BEC38 BEVEL ENTRY CLIP | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± N/A (.XXX) ± N/A (.XX) ±.020 (.5) ANGLES ± N/A | UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION. |
| DRAWN BY GDH | MAT'L: SCALE 1 1/2 X |
| DATE 11-30-94 | 6/6 NYLON |
| CHK'D | DWG GB0239CG |
| | SIZE A |

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP |
|-----|----------|-----|-----|-----------------|----------|---|------|-----|
| R | 11-30-94 | GDH | | INITIAL RELEASE | GB0239CG | R | | |