THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

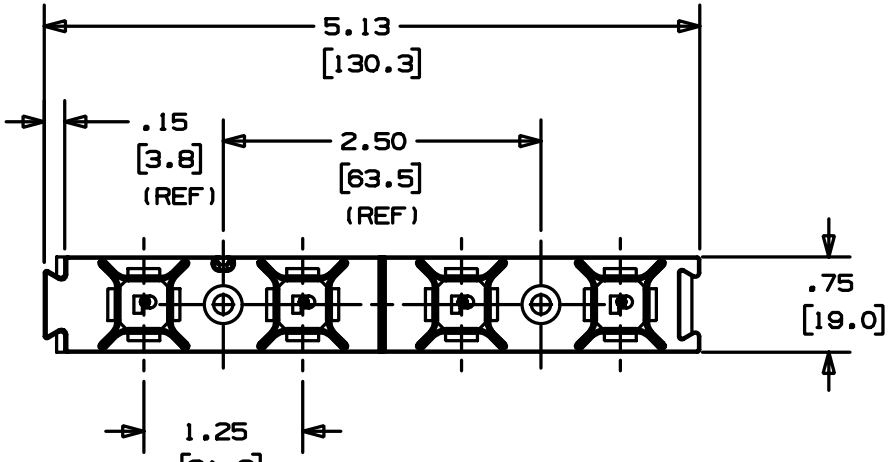

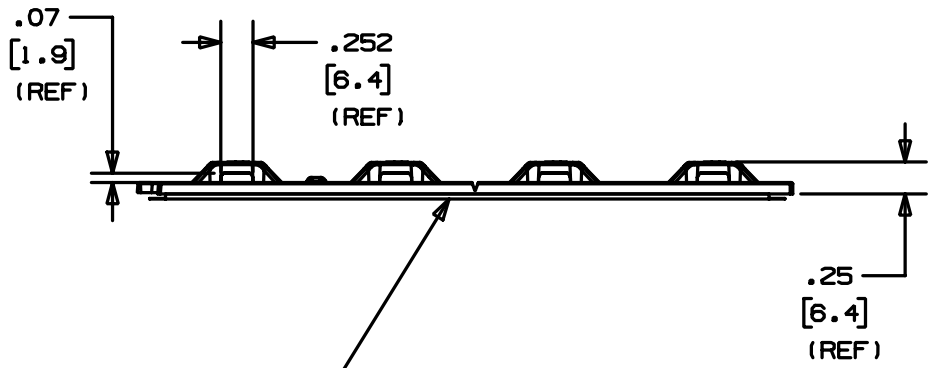

ADHESIVE BACKING: RUBBER OR ACRYLIC BASED PRESSURE SENSITIVE FOAM ADHESIVE TAPE 0.04 (1.0) REF. THICK WITH A PROTECTIVE LINER. MOUNT IS DESIGNED TO SUPPORT 1.85 lbs (838g) MAX. WEIGHT ON A CLEAN DRY SMOOTH SURFACE.

PANDUIT PART NO.	MOUNTING OPTIONS	WEIGHT lbs 10 (g) pcs
ABMQS-__-___	A - RUBBER ADHESIVE AT- ACRYLIC ADHESIVE S8- SCREW APPLIED	0.13 (58.97)

NOTES:
1. SEE CURRENT PRICE SHEET FOR PACKAGE SIZE AND PRODUCT COLOR OPTIONS.
2. PRODUCT HAS A CONTINUOUS OPERATING TEMPERATURE:
   -S6 185°F (85°C)
   -A 120°F (50°C)
   -AT 180°F (82°C)
3. PRODUCT COMPATIBLE WITH CABLE TIE CROSS-SECTION(S):
   S STANDARD
   I INTERMEDIATE
   M MINATURE
   SUPER GRIP CABLE TIES
   SG200
   SG250
   SG300

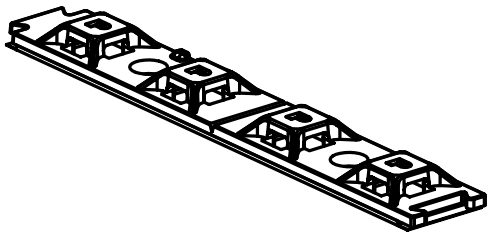

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS: G02722DC_PB_ABMQ_00

PANDUIT CORP. TINLEY PARK, ILLINOIS

ADHESIVE BACKED MULTIPLE BRIDGE MOUNT (ABMQS-__-___)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25]
(.XX) ±0.02 [0.5] ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
R	2/28/05	TMSA		INITIAL RELEASE	GB2722DC R		

DRAWN BY: JAD
DATE: 2/28/05
CHK'D:
MAT'L: ABS
SCALE: NONE
DRAWING NO.: GB2722DC
DWG SIZE: A