




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	DESCRIPTION	WEIGHT
NK388M**Y	CATEGORY 3 KEYSTONE MODULE: 8 POSITION, 8 WIRE WITH TERMINATION CAP COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	.66 LB/50 PCS (300 g/50 PCS)
NK366UM**Y	CATEGORY 3 KEYSTONE MODULE: 6 POSITION, 6 WIRE WITH TERMINATION CAP COLOR COLOR CODED FOR USOC WIRING SCHEME.	
NK366M**Y	CATEGORY 3 KEYSTONE MODULE: 6 POSITION, 6 WIRE	

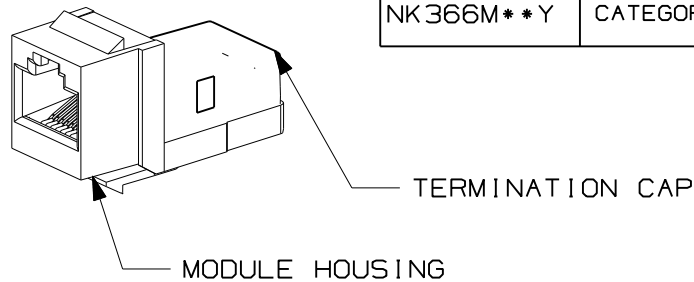

- NOTES:
- SEE CURRENT NETKEY™ CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - MATERIAL:
MODULE HOUSING: ABS
NOMINAL WALL THICKNESS: .078(2.0)
TERMINATION CAP: POLYCARBONATE.
 - ALL 8 POSITION, 8 WIRE CONNECTOR MODULES WILL ACCEPT TWO, THREE OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
 - DIMENSIONS IN BRACKETS ARE IN METRIC.

PANEL OPENING REQUIREMENTS
PANEL THICKNESS: .048"-.058"
(1.22mm-1.47mm)

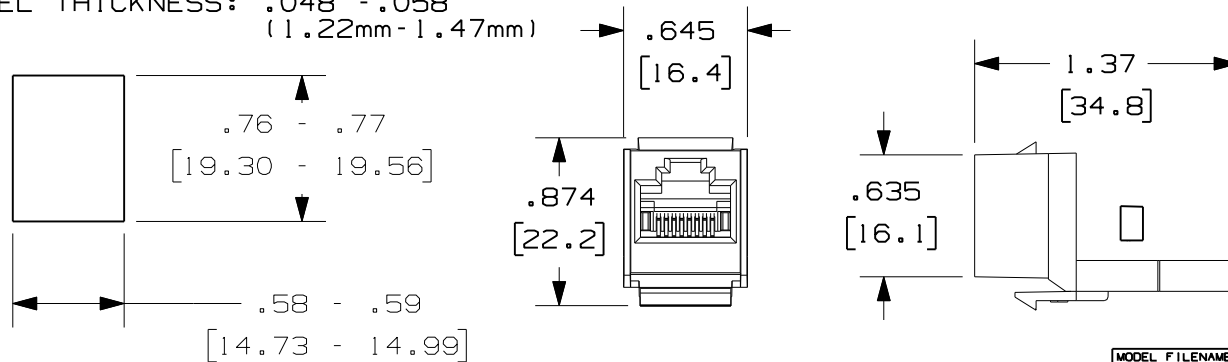

MODEL FILENAME	M00708AA_STD_KYSTN_01	SIZE	A
DRAWING FILENAME	M02479KX_DC285_00A		
TITLE	NETKEY CAT 3 KEYSTONE STYLE MODULE CUSTOMER DRAWING		
	PANDUIT [®] CORP. TINLEY PARK, IL 60477	I.I. NUMBER	
	THIRD ANGLE PROJECTION	PRODUCT SPEC	
	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.	WORK INSTRUCTION	
	DIMENSIONAL TOLERANCES ARE: (.X) ±.03(.8) (.XXX) ±.005 (.13) (.XX) ± ANGLES ±	SCALE	FULL
DRAWN BY	TA	REVIEW DRAWING NUMBERS	PART NO.
DATE	3-18-06		NK3*****Y
CHK'D			DRAWING NO.
			02479-285

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-18-06	TA		RELEASED TO PRODUCTION	02479-285				