THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	COPPER CONDUCTOR SIZE	EXPANDED WIRE RANGE**	BARREL I.D. ±.01	BARREL O.D. ±.01	OVERALL LENGTH "A" ±.12	WIRE STRIP LENGTH	PANDUIT CRIMP TOOL PART NUMBERS: CT-720	CT-920, CT-920CH, CT-930, CT-930CH, CT-940CH*, CT-2920, CT-2940*	CT-2001	CT-2950*** CT-2980 CT-980 CT-980CH
							DIE PART NO./ DIE SET COLOR & INDEX NO./ NUMBER OF CRIMPS			
SCL300-X	300 MCM	#2/0-300 MCM	.650	.813	4.12	2	CD-720-4 WHITE P66 4 CRIMPS	CD-920-300 WHITE P66 3 CRIMPS	CD-2001-300 WHITE P66 3 CRIMPS	STD 3 CRIMPS
SCL350-X	350 MCM	#3/0-350 MCM	.700	.875	4.12	2	CD-720-5 RED P71 4 CRIMPS	CD-920-350 RED P71 3 CRIMPS	CD-2001-350 RED P71 3 CRIMPS	STD 3 CRIMPS
SCL400-6	400 MCM	#4/0-400 MCM	.762	.950	4.37	2-1/8	CD-720-6 BLUE P76 4 CRIMPS	CD-920-400 BLUE P76 3 CRIMPS	CD-2001-400 BLUE P76 4 CRIMPS	STD 3 CRIMPS
SCL500-6	500 MCM	#4/0-500 MCM	.836	1.059	4.62	2-1/4	CD-720-7 BROWN P87 4 CRIMPS	CD-920-500 BROWN P87 3 CRIMPS	CD-2001-500 BROWN P87 4 CRIMPS	STD 3 CRIMPS
SCL600-6	600 MCM	250-600 MCM	.923	1.187	5.50	2-11/16	———	CD-920-600 GREEN P94 4 CRIMPS	———	STD 4 CRIMPS
SCL750-6	750 MCM	500-750 MCM	1.031	1.299	5.87	2-7/8	———	CD-920-750 BLACK P106 4 CRIMPS	———	STD 4 CRIMPS
SCL1000-3	1000 MCM	———	1.173	1.500	6.12	3	———	———	———	———

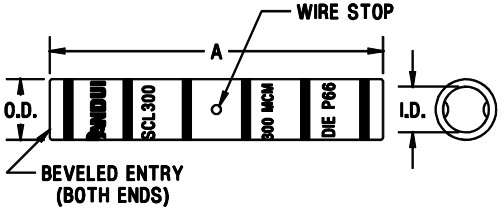

NOTES:

1. MATERIAL - HIGH CONDUCTIVITY SEAMLESS COPPER TUBING.
2. ELECTRO-TIN PLATED.
3. BARREL COLOR CODED WITH DIE SET INDEX NUMBER.
4. UL LISTED WITH CODE COPPER CONDUCTORS FOR APPLICATIONS UP TO 35 KV, FILE E52164.
5. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
6. CSA CERTIFIED FOR APPLICATIONS UP TO 600 V, FILE LR31212.
7. FOR USE WITH COPPER CABLES ONLY.

* CD-920 DIES CAN BE USED WITH CT-940CH AND CT-2940 TOOLS WITH CD-940-DA ADAPTER
** WITH CT-980, CT-980CH, CT-2950 & CT-2980
*** MAX SIZE 500 MCM

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST
03	4/01	BDK		ADDED THE LETTER "P" TO THE DIE INDEX NUMBER, ADDED CT-2950,CT-2980, CT-980 & CT-980CH, DRAWING NUMBER WAS M11320B_REV.02,REMOVED ALTERNATE DIE INDEX NUMBER NOTE, REVISED UL/CSA LOGOS, ADDED EXPANDED WIRE RANGE			
02	3.94	WB		ADDITIONAL NOTES ADDED.		KS	
01	11-93	PWS		FILESPEC WAS C41106 & DWG WAS C41106	01884	RM	LA
00	3-93	PWS	GRM	RELEASED	01415		

CAD FILENAME/LAYERS: C41132_03

PANDUIT CORP TINLEY PARK, ILLINOIS

SCL STANDARD BARREL
#300 THRU 1000 COPPER SPLICES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION

DRAWN BY PWS | DATE 3-10-93 | CHK'D GRM | MAT'L: SEE NOTES ABOVE | SCALE N/A | DRAWING NO. C41132 | SIZE B