

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT<br>PART NO. * | NOMINAL<br>BUNDLE<br>DIAMETER | MAXIMUM<br>RECOMMENDED<br>BUNDLE DIAMETER | DIMENSIONS       |                 |                 | WEIGHT<br>lbs / 100<br>(g) / ft. |
|-----------------------|-------------------------------|---|------------------|-----------------|-----------------|----------------------------------|
|                       |                               |   | "A" (Ref)        | "B" (Ref)       | "C"             |                                  |
| PW38_----             | 0.38<br>(9.65)                | 0.43<br>(10.92)                           | 0.36<br>(9.14)   | 0.125<br>(3.18) | 0.030<br>(0.76) | 1.68<br>(762.0)                  |
| PW50_----             | 0.50<br>(12.70)               | 0.55<br>(13.97)                           | 0.47<br>(11.94)  |                 | 0.032<br>(0.81) | 2.01<br>(910.00)                 |
| PW75_----             | 0.75<br>(19.05)               | 0.81<br>(20.57)                           | 0.72<br>(18.29)  |                 | 0.035<br>(0.89) | 2.87<br>(1301.81)                |
| PW100_----            | 1.00<br>(25.40)               | 1.125<br>(28.58)                          | 0.81<br>(20.57)  |                 | 0.040<br>(1.02) | 4.47<br>(2027.6)                 |
| PW150_----            | 1.50<br>(38.10)               | 1.625<br>(41.28)                          | 1.125<br>(28.58) |                 | 0.042<br>(1.07) | 7.65<br>(3469.9)                 |



NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE. NO SPLICES ALLOWED.
- DIMENSION "A" IS STATIC INSIDE DIAMETER. DIMENSION "B" IS WIDTH OF BREAKOUT SLOTS. DIMENSION "C" IS WALL THICKNESS.
- FLAME RETARDANT PAN-WRAP IS OFFERED IN THE FOLLOWING COLORS:

SAMPLE PART NUMBER:


PW75FR-C20

20 - NATURAL IN COLOR  
20 - BLACK

0 - 25 feet (7.62 meters)  
L - 50 feet (15.24 meters)  
C - 100 feet (30.48 meters)  
T - 200 feet (60.96 meters)  
TL - 250 feet (76.20 meters)


(REFER TO CURRENT PRODUCT OFFERING FOR OPTIONAL STANDARD PACKAGING QUANTITIES)

FR - FLAME RETARDANT POLYETHYLENE

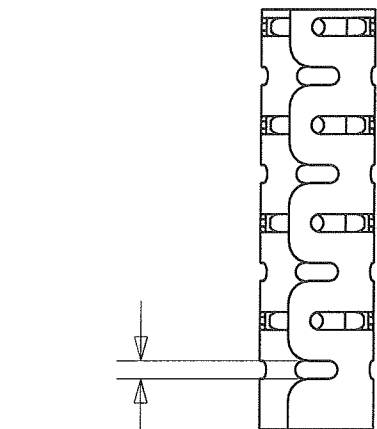


"B"

"A"  $\varnothing$



"C"

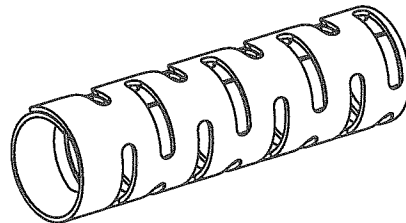

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS G03597DS\_DC\_GB2508BK/00B

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

PAN-WRAP  
PW\_\_\_FR-\_\_ (Y)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X)  $\pm 0.05$  (1.3) (.XXX)  $\pm 0.010$  (0.25)  
(.XX)  $\pm 0.02$  (0.5) ANGLES  $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

| REV | DATE    | BY   | CHK | DESCRIPTION                | ECN      | R   | CUST | SUP | DRAWN BY | MAT'L:  | SCALE      | DWG NO.  | DWG SIZE |
|-----|---------|------|-----|----------------------------|----------|-----|------|-----|----------|---------|------------|----------|----------|
| 00B | 8-7-09  | TMSA | ppk | CHANGED NOTE 3, ADDED PW38 | GB2508BK | 00B |      |     | JAD      |         | NONE       |          |          |
| 1   | 5-29-08 | JAD  |     | ADDED Y PARTS              | GB2508BK | 1   |      |     | DATE     | 11/5/04 | SEE NOTE 3 | GB2508BK | A        |
|     |         |      |     |                            |          |     |      |     | CHK'D    |         |            |          |          |