


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

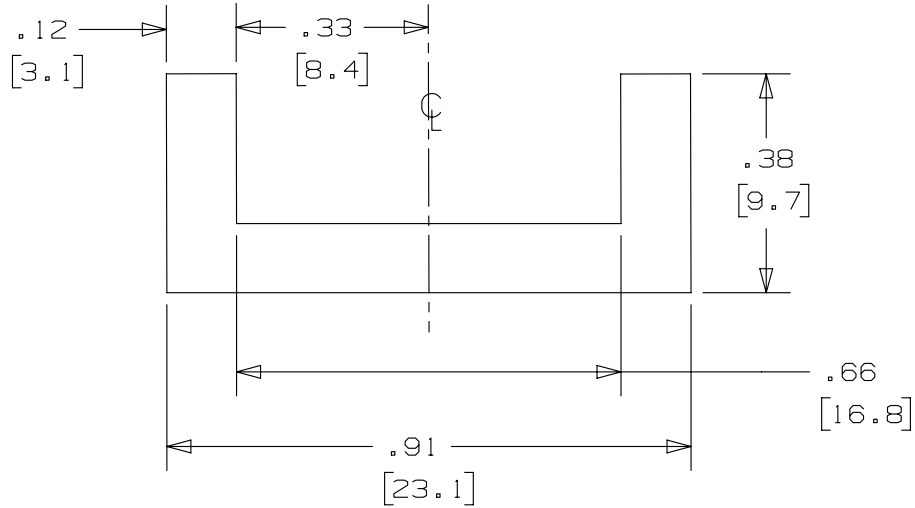

NOTES:

1. MAT'L. - NEOPRENE:  
RATING AS REQUIRED TO MEET MIL-R-6855 SPEC.
2. COLOR - BLACK
- Ⓐ 3. PART WEIGHT: 8.7 LBS, PER 100 FT.
4. 60±5 SHORE A DUROMETER RATING
5. TEMPERATURE RANGE OF -40° F (-40° C) TO 200° F (93° C)
6. DIM'S IN [ BRACKETS ] ARE MILLIMETERS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	4/13	JAMB	MIM	RGRO	UPDAE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01049
01A	6/05	JAMB	EJD	SKB	Ⓐ REMOVED PART WGT *43.5 lbs PER 500 FT*	12683
00A	5/05	JMMR	EJD	SKB	DRAWING RELEASED	12198

TITLE				MLTEH/SH CUSHION SLEEVING PCSSH-B-CR							
ITEM REVISION NAME				CUSTOMER DRAWING							
DATASET FILE NAME				N41202BS_DC/02A							
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]				 MATERIAL: SEE NOTES							
.x ± .1 [ 2.54 ] .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ] ANGLES ± 5 °											
DRAWN BY				DATE		CHK		SCALE		DRAWING NUMBER:	
JMMR				5/05		EJD		3:1		N41202BS_DC	
REV				DATE		CHK		SCALE		SHT 1 OF 1	
JMMR				5/05		EJD		3:1		A	