



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- IDENTIFICATION: 1RU HORIZONTAL, (10) C-13, METERED 120V / 30A / SINGLE-PHASE POU
- | PART NO.      | COLOR |
|---------------|-------|
| HB1A1M2BT10M1 | BLACK |
- ACCESSORY COMPONENTS:  
 (4) 10-32 x 1/2" MOUNTING SCREWS  
 (4) 12-24 x 1/2" MOUNTING SCREWS
  - DIMENSIONS IN PARENTHESES ARE METRIC (mm).
  - POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
  - UL® & c-UL® LISTED 1950.
  - RoHS COMPLIANT.
  - VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
  - MAXIMUM AVAILABLE INPUT POWER = 2.9 KW
  - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

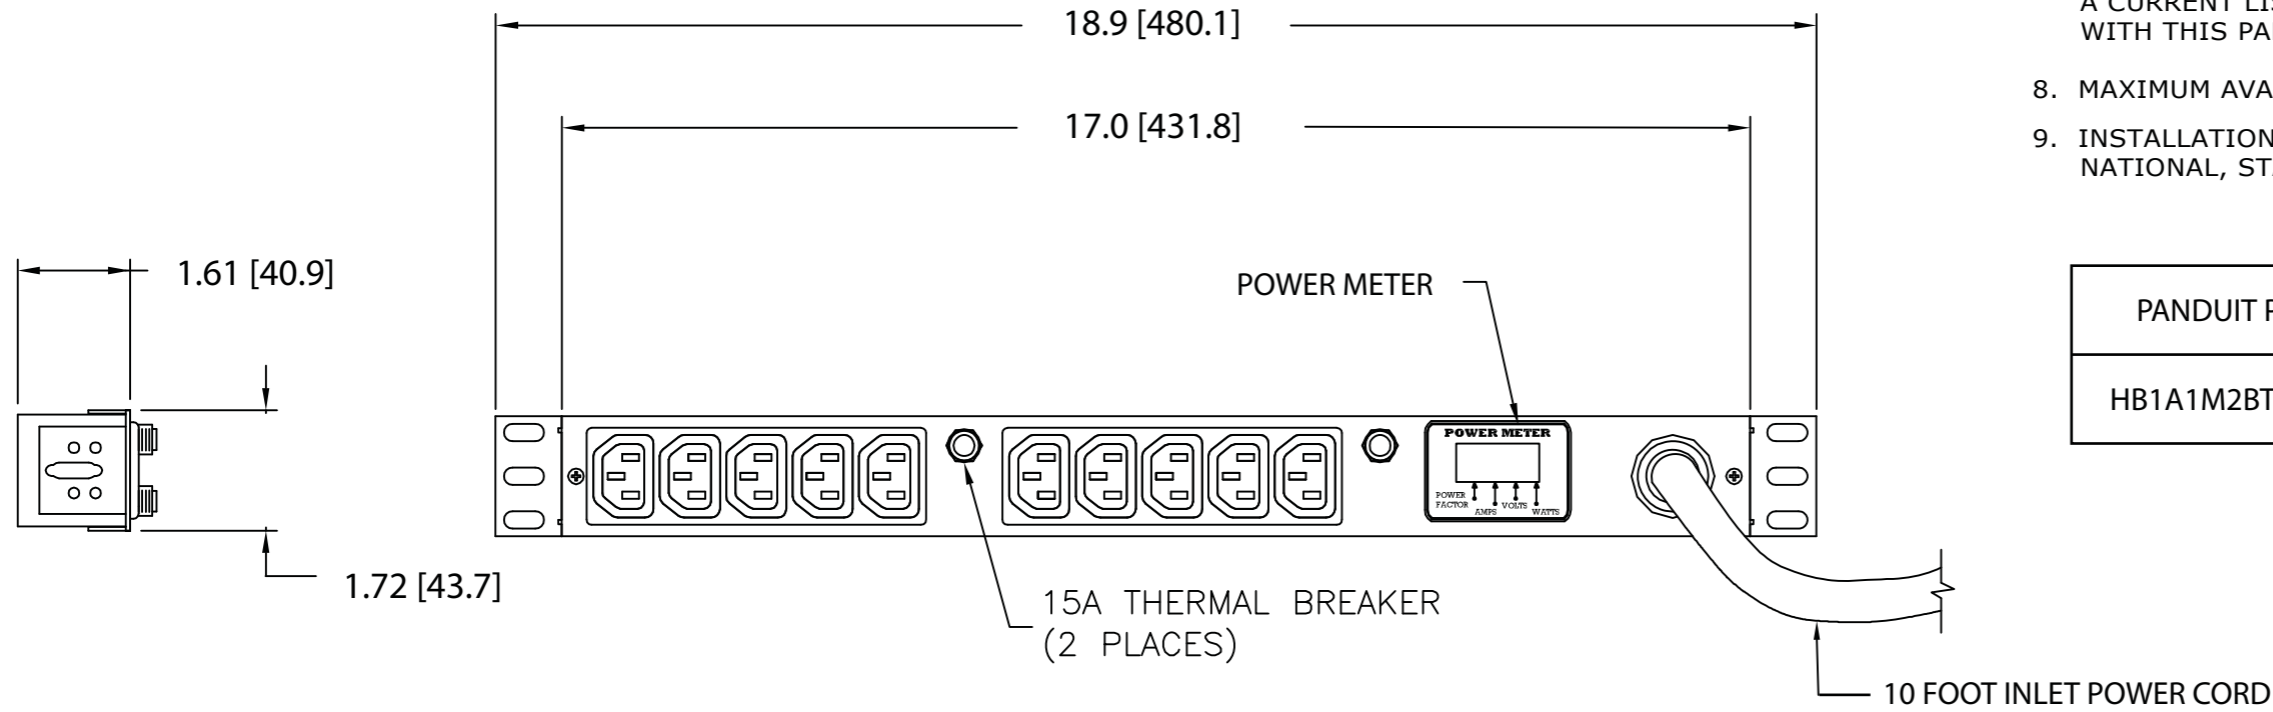

PANDUIT P/N	WEIGHT
HB1A1M2BT10M1	6 lb (2.7 kg)

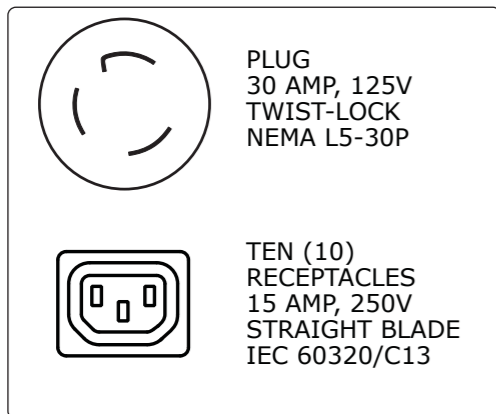

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01A	8-2-12	PIP	MRWA	A. UPDATED NOTE #8. B. ADDED NOTE #9.	09V098DK				
00A	2-24-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098DK				

MODEL FILENAME	09V098DK/01.PRT	
CAD FILENAME/LAYERS	09V098DK_DC/01A.PRT	
<b>PANDUIT</b> CORP TINLEY PARK, ILLINOIS		
1RU HORIZONTAL, (10) C-13, METERED POWER OUTLET UNIT CUSTOMER DRAWING		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION
INCHES	± 0.03	[METRIC - MILLIMETER] ANGLE
X.X	± 0.015	X.X ± 0.8
X.XX	± 0.005	X.X ± 0.4
X.XXX		X.XX ± 0.13
DRAWN BY	MAV	MAT'L:
DATE	2-24-11	SCALE
CHK'D	KRKE	NONE
		DRAWING NO.
		09V098DK
		DWG SIZE
		B