THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

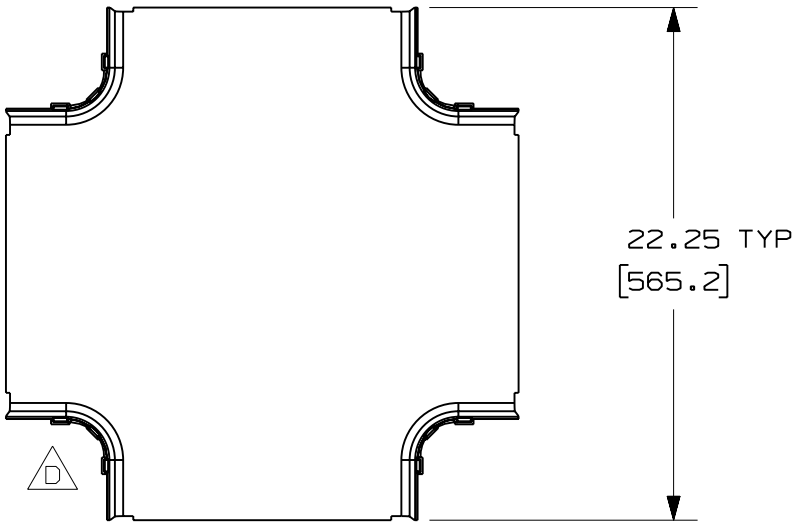

PANDUIT PART NUMBER	WEIGHT
FRFWC12X4	3.35 LB/EACH (1520g/EACH)

C

E NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 12x4 FOUR-WAY CROSS FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.

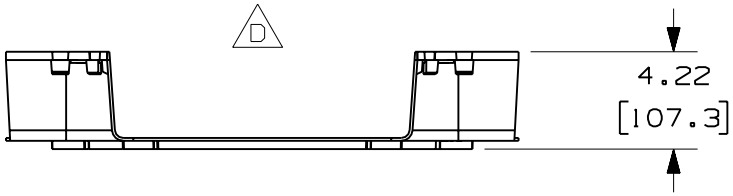

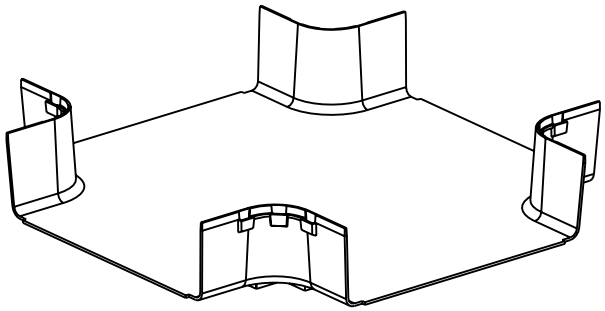

ENG. REF.: D37617BK_DC_FRFWC12X4_01.prt

CAD FILENAME/LAYERS A FRFWC12X4.pdf

PANDUIT CORP TINLEY PARK, ILLINOIS

B FIBERRUNNER 12x4 FOUR-WAY CROSS FITTING (FRFWC12X4)
CUSTOMER DRAWING

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	GMBH
-	--------	---	---	E. REVISED GENERAL NOTES	-------- --	--		
-	--------	---	---	D. REVISED DRAWING VIEWS C. REVISED PART WEIGHT	-------- --	--		
1	6-28-06	DTP	RN	B. REVISED DRAWING TITLE A. REVISED CAD FILENAME	37617-70 RN	RN		
R	1-2-01	JHNU	SMF	RELEASED TO PRODUCTION	37617-70 HIW	HIW		

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ±.03 (.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: JHNU
DATE: 1-2-01
CHK'D: HIW
MAT'L: ABS
SCALE: NONE
DRAWING NO.: 37617-70
DWG SIZE: A