



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

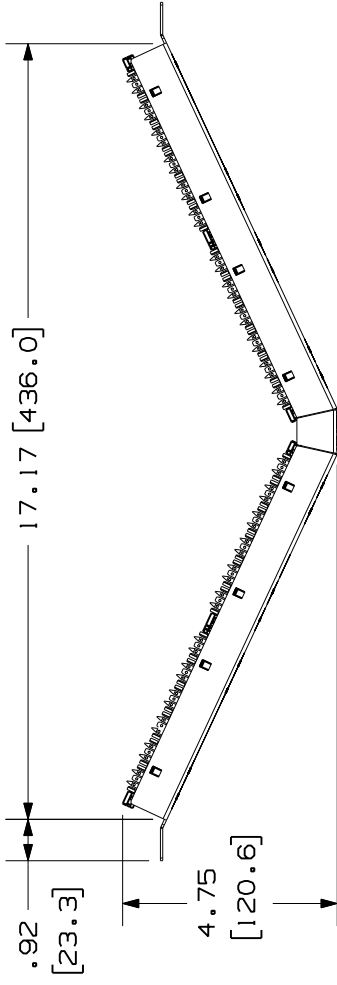

PANDUIT PART NUMBER	WEIGHT
DPA485E88TGY	2.36 lb (1070.48 g)

**NOTES:**

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL: PANEL HOUSING: STEEL  
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
- RETENTION CAP: THERMOPLASTIC RESIN UL94V-0  
48 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6X1X15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

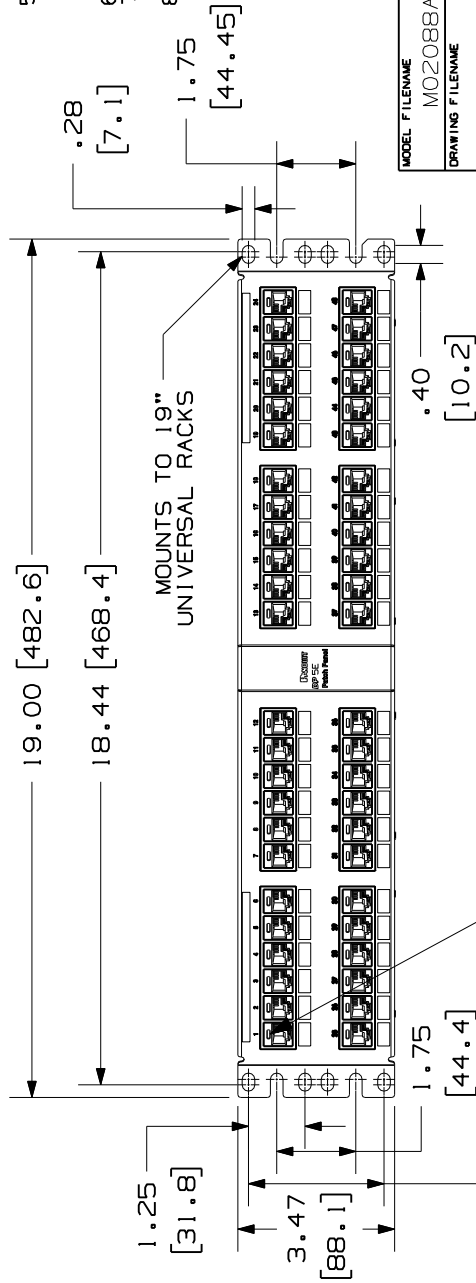

CID\*\*-C & CIP\*\*-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME	MO2088AD_2RU_48PORT_ANG_PANEL_ASSY_03	SIZE	A
DRAWING FILENAME	MO2479JG_DC243_00A		

**DP5E 48 PORT ANGLED PATCH PANEL CUSTOMER DRAWING**

	<b>PANDUIT</b> <sup>TM</sup>	I.I. NUMBER	
TINLEY PARK, ILL 60477		PRODUCT SPEC	
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.		WORK INSTRUCTION	
DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (XXX) ±.005 (.XX) ±.01 ANGLES ± .1°		SCALE	.25 : 1
THIRD ANGLE PROJECTION		PART NO.	SEE CHART
DRAWN BY: LZ		DRAWING NO.	02479-243
DATE: 3-4-05			
CHK'D:			

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-243				