


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NUMBER	WEIGHT
DPA24688TGY	1.26 lb (1070.48 g)

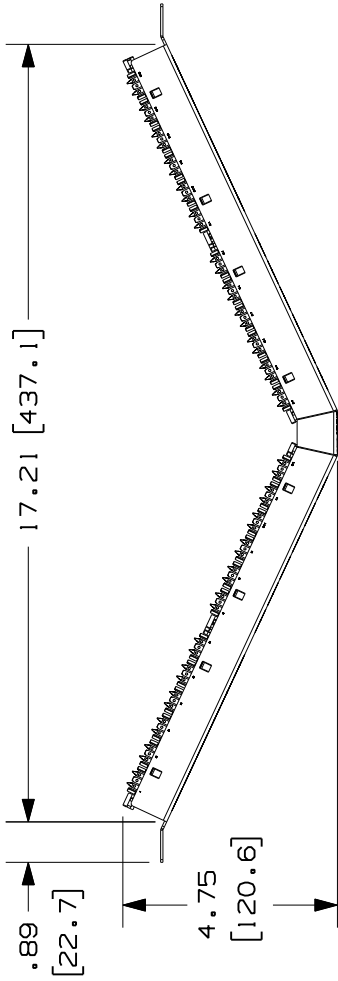

NOTES:
 1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.

2. MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B

- RETENTION CAP:
 THERMOPLASTIC RESIN UL94V-0
 3. 24 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
 4. THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
 5. FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6X1X15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
 6. DIMENSIONS IN BRACKETS ARE IN METRIC.
 7. USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
 8. RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

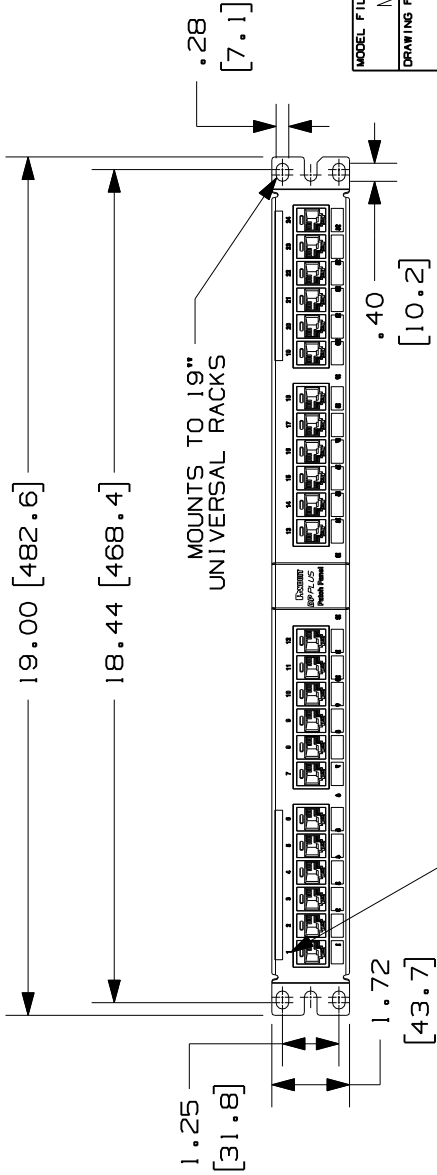

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME MO208BAC_1RU_24PORT_ANG_PANEL_ASSY_04
 DRAWING FILENAME MO2479JD_DC240_00A
 SIZE A

DP6 PLUS 24 PORT ANGLED PATCH PANEL CUSTOMER DRAWING

	PANDUIT ™ TINLEY PARK, ILL 60477
	THIRD ANGLE PROJECTION
DRAWN BY	LZ
DATE	3-4-06
CHK'D	

I.I. NUMBER	
PRODUCT SPEC	
WORK INSTRUCTION	
SCALE	.25 : 1
PART NO.	SEE CHART
DRAWING NO.	02479-240

ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.
 DIMENSIONAL TOLERANCES ARE:
 (.X) ±.03 (.XXX) ±.005
 (.XX) ±.01 ANGLES ± 1°
 REVIEW DRAWING NUMBERS

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-240				