



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT
DPA24688TGY	1.26 lb (572.73 g)

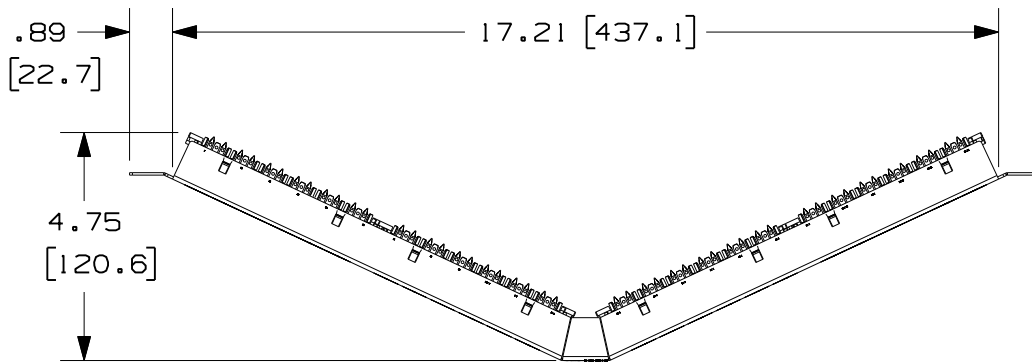

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 24 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

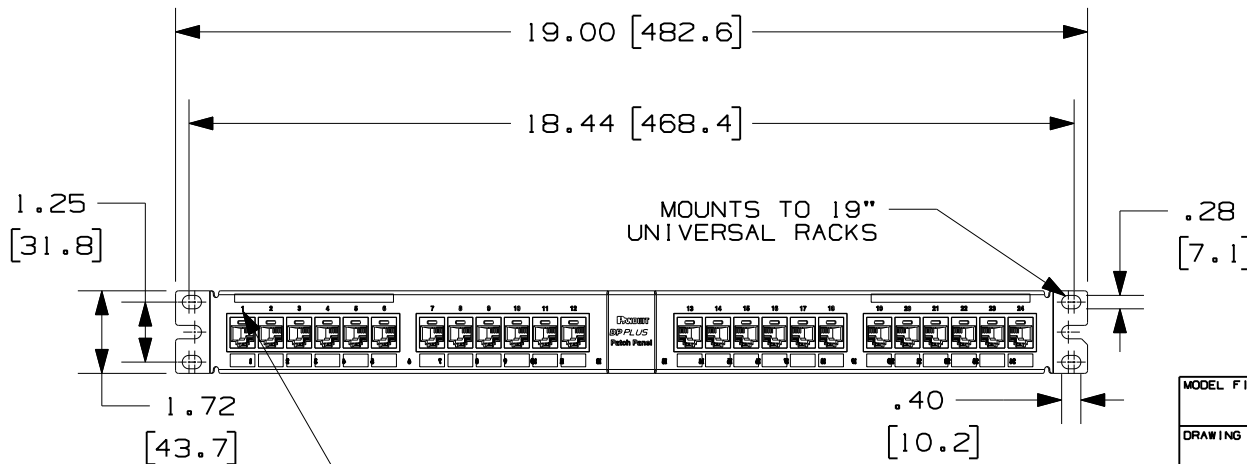

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME	MO2088AC_1RU_24PORT_ANG_PANEL_ASSY_04	SIZE	A
DRAWING FILENAME	MO2479JD_DC240/00B		

DP6 PLUS 24 PORT ANGLED PATCH PANEL CUSTOMER DRAWING

<p>PANDUITTM CORP. TINLEY PARK, ILL 60477</p>	I.I. NUMBER
	PRODUCT SPEC
<p>THIRD ANGLE PROJECTION</p>	<p>ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.</p> <p>DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.005 (.XX) ±.01 ANGLES ± 1°</p>
<p>WORK INSTRUCTION</p> <p>SCALE .25 : 1</p>	<p>PART NO.</p> <p>SEE CHART</p>
<p>DRAWN BY LZ</p> <p>DATE 3-4-06</p> <p>CHK'D CEF</p>	<p>DRAWING NO.</p> <p>02479-240</p>

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	1-7-09	BJN	EJH	A. WAS 1070.48 g	02479-240				
R	3-4-06	LZ	CEF	RELEASED TO PRODUCTION	02479-240	CEF		CEF	CEF