


PANDUIT PART NO.	DESCRIPTION	WEIGHT
CJ64XXXXXY	6 POSITION, 4 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66XXXXXY	6 POSITION, 6 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66UXXXXXY	6 POSITION, 6 WIRE MODULAR JACK TERMINATION CAP IS COLOR CODED FOR USOC WIRING SCHEME	1.62 lb/100 PCS. (.738 g/100 PCS.)

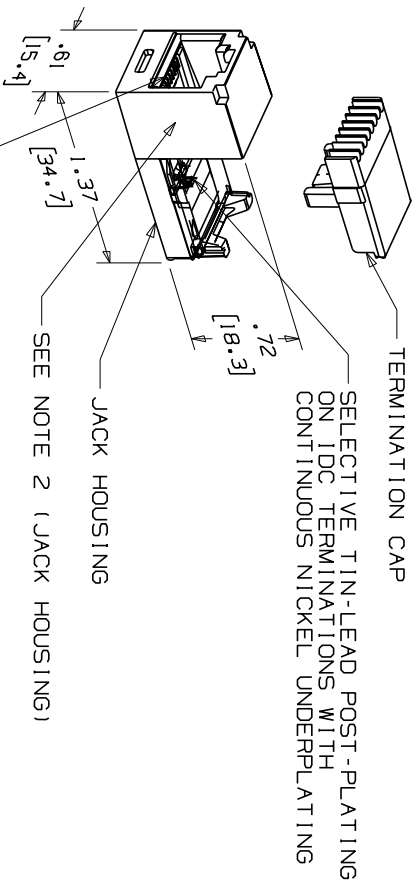

50 MICRO INCH GOLD PLATING AT MATING JACK SIDE WITH CONTINUOUS NICKEL UNDERPLATING

- NOTE:
1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
  2. MATERIAL: JACK HOUSING - ABS
  3. NOMINAL WALL THICKNESS .078(2.01). TERMINATION CAP - POLYCARBONATE. THIS PART IS DESIGNED FOR USE WITH MINI-COM PLATES AND BOXES.
  4. MEETS ALL CATEGORY 3 PERFORMANCE REQUIREMENTS AS DEFINED BY EIA/TIA.
  5. DIMENSIONS IN PARENTHESIS ARE IN METRIC.

GND FILENAME/LAYERS										MO2479NJ_DC349_00A.PRT														
PANDUIT																								
CORP. TINLEY PARK, ILLINOIS																								
MINI-JACK CATEGORY 3 TWISTED																								
PAIR CONNECTOR MODULE																								
CUSTOMER DRAWING																								
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .03 (.XXX) ± .005 (.XXX) ± .01										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.														
DRAWN BY: NER										SCALE: NONE														
DATE: 3-25-06										AS NOTED														
CHECKED BY:										DRAWING NO. 02479-349														
										DWG SIZE A														
REV	DATE	BY	CHK	DESCRIPTION																ECN	CHK	CUST	SUP	
R	3-25-06	NER		RELEASED TO PRODUCTION																02479-349				